

GEA VARIPUMP



GEA Hilge CONTRA

Single- and Multi-Stage Pumps
Catalog

Legal notice

Publication date: March 2022

The publication of specifications, technical data and information in written or electronic form does not release the user from the responsibility of checking for themselves all products delivered by us for suitability for the application(s) intended. These may be subject to change without prior notification. Errors and printing errors excepted – we assume no liability for the correctness of specifications given.

The general terms and conditions of delivery apply.

All rights reserved – copyright on all contents.

GEA reserves the right to make technical changes to the information in this catalog.

GEA Hilge

Niederlassung der GEA Tuchenhausen GmbH

Hilgestraße 37–47, 55294 Bodenheim, Germany

Registered Office: Büchen, Court of Registration: HRB 836 SB in Lübeck

Management Board: Tobias Dieckmann, Michael Wulle, Oliver Hegehofer

VAT-ID: DE 812589019, Tax No.: 105/5857/1004

Flow Components

Introduction	6
--------------------	---

Hygienic Pumps

Introduction	7
Certificates	18

GEA Hilge CONTRA Pumps

Overview	20
Product Range	28
Connection Guide	29
Seals	32
Installation	34
Media Guide	36
Pump Selection Matrix	46
Connection Dimensions	48

GEA Hilge CONTRA I

Pump Selection Matrix	54
GEA Hilge CONTRA I Bloc – on Motor Foot	56
GEA Hilge CONTRA I Bloc – on Combi Foot	57
GEA Hilge CONTRA I Bloc – on Cast Iron Foot	58
GEA Hilge CONTRA I Bloc – on Stainless Steel Foot	59
GEA Hilge CONTRA I Bloc-SUPER – on Combi Foot	60
GEA Hilge CONTRA I Bloc-SUPER – on Cast Iron Foot	61
GEA Hilge CONTRA I Bloc-SUPER – on Stainless Steel Foot	62
GEA Hilge CONTRA I Bloc-V – on Vertical Stand	63
GEA Hilge CONTRA I Adapta/Adapta-tronic – on Combi Foot (80–90)	64
GEA Hilge CONTRA I Adapta/Adapta-tronic – on Combi Foot (100–132)	65
GEA Hilge CONTRA I Adapta/Adapta-tronic – on Cast Iron Foot	66
GEA Hilge CONTRA I Adapta/Adapta-tronic – on Stainless Steel Foot	67
GEA Hilge CONTRA I Adapta-SUPER – on Combi Foot (80–90)	68
GEA Hilge CONTRA I Adapta-SUPER – on Combi Foot (100–132)	69
GEA Hilge CONTRA I Adapta-SUPER – on Cast Iron Foot	70
GEA Hilge CONTRA I Adapta-SUPER – on Stainless Steel Foot	71
GEA Hilge CONTRA I Adapta/Adapta-tronic – on Vertical Stand	72

Performance Curves

GEA Hilge CONTRA I – 1-stage, 50 Hz	74
GEA Hilge CONTRA I – 2-stage, 50 Hz	75
GEA Hilge CONTRA I – 3-stage, 50 Hz	76
GEA Hilge CONTRA I – 4-stage, 50 Hz	77
GEA Hilge CONTRA I – 5-stage, 50 Hz	78
GEA Hilge CONTRA I – 6-stage, 50 Hz	79
GEA Hilge CONTRA I – 1-stage, 60 Hz	80
GEA Hilge CONTRA I – 2-stage, 60 Hz	81
GEA Hilge CONTRA I – 3-stage, 60 Hz	82
GEA Hilge CONTRA I – 4-stage, 60 Hz	83

GEA Hilge CONTRA II

Pump Selection Matrix	84
GEA Hilge CONTRA II Bloc – on Motor Foot	86
GEA Hilge CONTRA II Bloc – on Combi Foot (90–132)	87
GEA Hilge CONTRA II Bloc – on Combi Foot (160)	88
GEA Hilge CONTRA II Bloc – on Cast Iron Foot	89
GEA Hilge CONTRA II Bloc – on Stainless Steel Foot	90
GEA Hilge CONTRA II Bloc-SUPER – on Combi Foot (90–132)	91
GEA Hilge CONTRA II Bloc-SUPER – on Combi Foot (160)	92
GEA Hilge CONTRA II Bloc-SUPER – on Cast Iron Foot	93

GEA Hilge CONTRA II Bloc-SUPER – on Stainless Steel Foot	94
GEA Hilge CONTRA II Bloc-V – on Vertical Stand	95
GEA Hilge CONTRA II Adapta/Adapta-tronic – on Combi Foot	96
GEA Hilge CONTRA II Adapta/Adapta-tronic – on Adjustable Feet (160)	97
GEA Hilge CONTRA II Adapta/Adapta-tronic – on Adjustable Feet (180)	98
GEA Hilge CONTRA II Adapta/Adapta-tronic – on Cast Iron Foot	99
GEA Hilge CONTRA II Adapta/Adapta-tronic – on Stainless Steel Foot	100
GEA Hilge CONTRA II Adapta/Adapta-tronic – on Adapta Foot	101
GEA Hilge CONTRA II Adapta-SUPER – on Combi Foot	102
GEA Hilge CONTRA II Adapta-SUPER – on Adjustable Feet (160)	103
GEA Hilge CONTRA II Adapta-SUPER – on Adjustable Feet (180)	104
GEA Hilge CONTRA II Adapta-SUPER – on Cast Iron Foot	105
GEA Hilge CONTRA II Adapta-SUPER – on Stainless Steel Foot	106
GEA Hilge CONTRA II Adapta/Adapta-tronic – on Vertical Stand	107

Performance Curves

GEA Hilge CONTRA II – 2-stage, 50 Hz	108
GEA Hilge CONTRA II – 3-stage, 50 Hz	109
GEA Hilge CONTRA II – 4-stage, 50 Hz	110
GEA Hilge CONTRA II – 5-stage, 50 Hz	111
GEA Hilge CONTRA II – 2-stage, 60 Hz	112
GEA Hilge CONTRA II – 3-stage, 60 Hz	113
GEA Hilge CONTRA II – 4-stage, 60 Hz	114
GEA Hilge CONTRA II – 5-stage, 60 Hz	115

GEA Hilge CONTRA III

Pump Selection Matrix	116
GEA Hilge CONTRA III Adapta-V – on Vertical Stand	118

Performance Curves

GEA Hilge CONTRA III – 2-stage, 50 Hz	119
GEA Hilge CONTRA III – 3-stage, 50 Hz	120
GEA Hilge CONTRA III – 4-stage, 50 Hz	121
GEA Hilge CONTRA III – 2-stage, 60 Hz	122
GEA Hilge CONTRA III – 3-stage, 60 Hz	123

Appendix

Inquiry Sheet	124
Description of Certificates and Test Reports	126
Abbreviations and Terms	127

GEA Flow Components

Keeping your product in motion



Regardless of the application – for our customers product quality and profitability are what matters. This is what GEA Flow Components is known for. Our engineers are specialists in everything that flows.

GEA Group

GEA is one of the largest technology suppliers for food processing and a wide range of other industries. The global group specializes in machinery, plants, as well as process technology and components. GEA provides sustainable solutions for sophisticated production processes in diverse end-user markets and offers a comprehensive service portfolio.

GEA Flow Components

In addition to our hygienic pump portfolio, our range of sophisticated process components also includes hygienic and aseptic valves as well as cleaning technology.

All components and services are available worldwide through the international GEA sales network.



Around one quarter of the milk processed is handled by GEA equipment



Roughly every second liter of beer is brewed using GEA equipment and solutions



Every fourth liter of human blood is handled by GEA equipment



Approx. one in three instant coffee lines has been built by GEA

GEA Hilge Hygienic Pumps – The heart of every process

GEA Hilge offers a versatile range of centrifugal and positive displacement pumps for a wide variety of sensitive applications in the beverage, food and pharmaceutical industries.

Our pumps with their sophisticated design ensure particularly gentle conveyance of the respective medium, offer lasting reliability and are characterized by economic efficiency. After all, hygienic pumps are used in processes that directly affect the product and production. They are the heart of every process.

State-of-the-art pump technology, made to our customers' preferences

At the GEA Hilge Hygienic Pumps Center of Competence in Bodenheim we develop innovative pumps and processes together with our customers. Our decades of up-close experience with operations and systems at our customers' production sites ensure optimum selection and configuration of the right pumps for every application (e.g. food and dairy, brewery and beverage, pharmaceutical and biotech, personal and home care).

Maximum efficiency

Two product lines, GEA VARIPUMP and GEA SMARTPUMP, enable our customers to choose from a highly versatile pump range with a multitude of smart adaption options to achieve simpler operation, higher-quality production, and reduced consumption of valuable resources. Special construction features of our many types of pumps provide for exceptionally gentle product handling, delivering top-quality products to consumers.

Maximum reliability


Our customers rely on the safe, continuous operation of their production processes without unplanned breaks or disturbances. That is why GEA pumps are optimized for uncompromising reliability in all applications. Thanks to their robust design and long service life, they are known as "workhorses" for their ease of maintenance and outstanding service, proven over decades, and for the great number of pumps currently in operation. Of course, GEA pumps also comply with all relevant hygiene standards and norms with continuous documentation and up-to-date certifications safely ensuring judicial security.



Two modern pump lines for maximum efficiency

Two product lines, GEA VARIPUMP and GEA SMARTPUMP, form a highly versatile pump range with a multitude of adaption options to ensure simpler operation, higher-quality production, and reduced consumption of valuable resources.

Selecting and configuring the right pump requires a high level of experience. The selection matrix provides initial guidance.

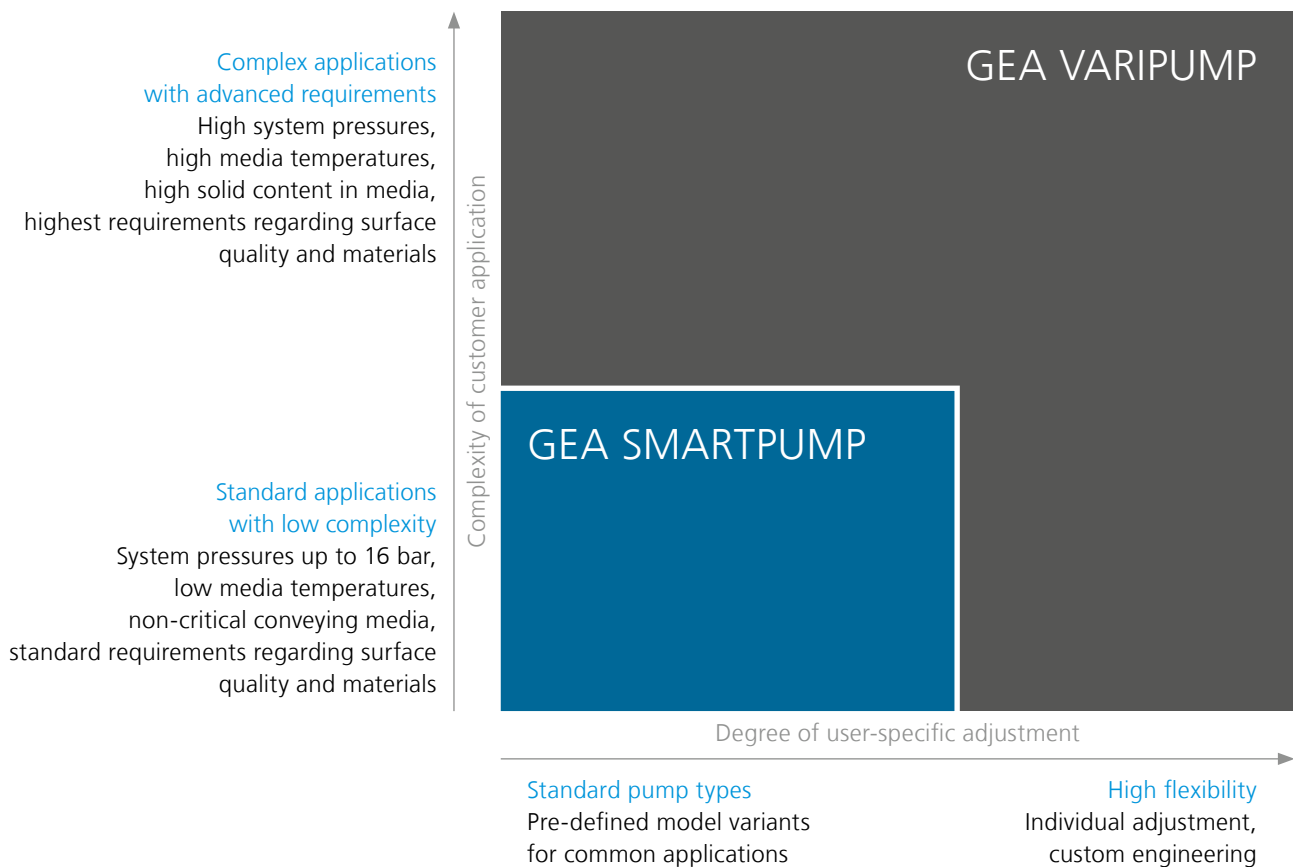

GEA VARIPUMP

The pump series in the GEA VARIPUMP line have been conceived for extreme application demands. The pumps are individually optimized by GEA for each task.

GEA VARIPUMP models are made entirely without die-cast components, offering high-quality surfaces and materials that meet stringent demands even in the sensitive pharmaceutical industry, further ensured by complementing services, e.g. Witnessed Factory Acceptance Test (FAT).

With a great variety of set-up and customizing options the pumps can be adapted individually to any production process, for lower operational costs and maximum system efficiency.

- Developed for advanced application conditions
- Project-specific customization
- Surface roughness up to $R_a \leq 0.4 \mu\text{m}$
- Product-wetted materials according to specific requirements (e.g. no cast parts, $F_e \leq 1\%$ optional)


GEA SMARTPUMP

The GEA SMARTPUMP line comprises highly standardized and attractively priced pump series for common, often-used applications at standard conditions. The pumps are easy to select and ready for fast delivery. Within pre-defined parameters, the standard models can be configured to individual tasks.


The modular construction using high-value materials, the proven “Hygienic Design” and easy-to-apply standardized spare parts all recommend GEA SMARTPUMP pumps for use in cost-critical production systems – at no compromise in terms of quality.

- Application for common and clearly defined “standard” process tasks
- Simple selection and configuration
- Fast delivery
- Standardized spare parts


Self-priming Pumps 50 Hz

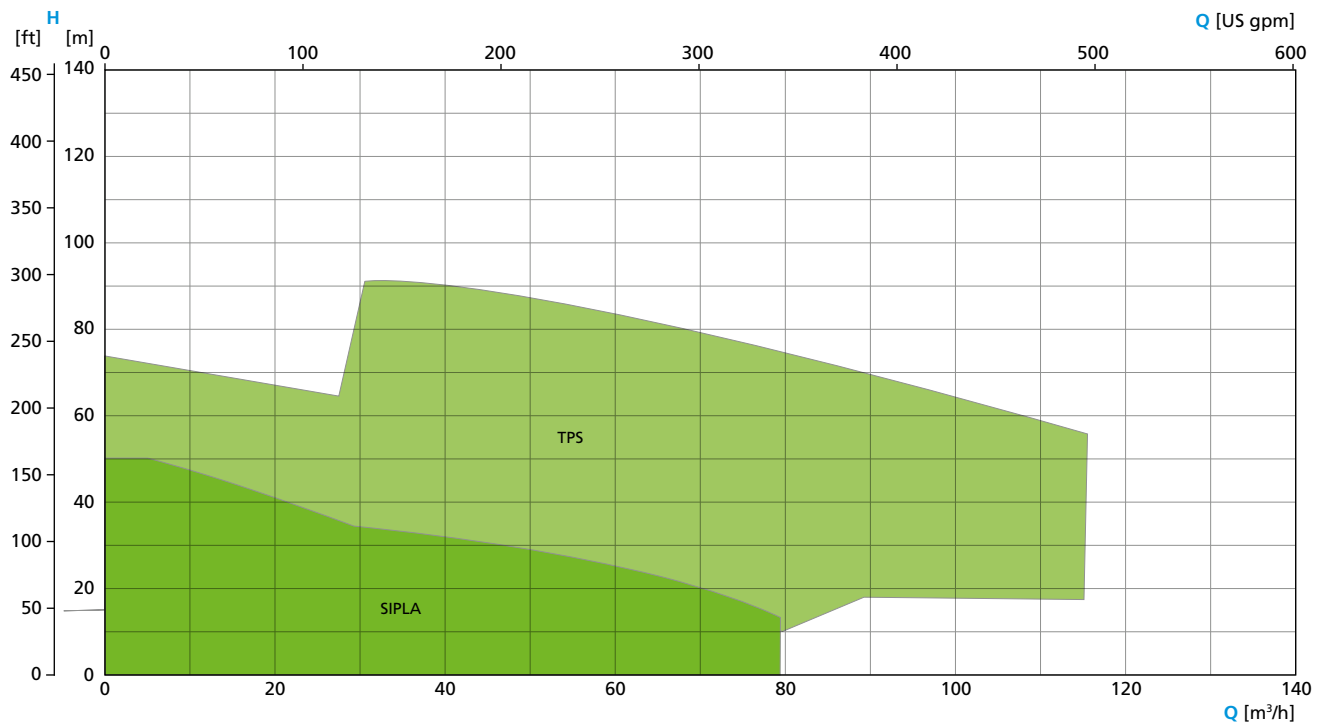


Self-priming Pumps 60 Hz

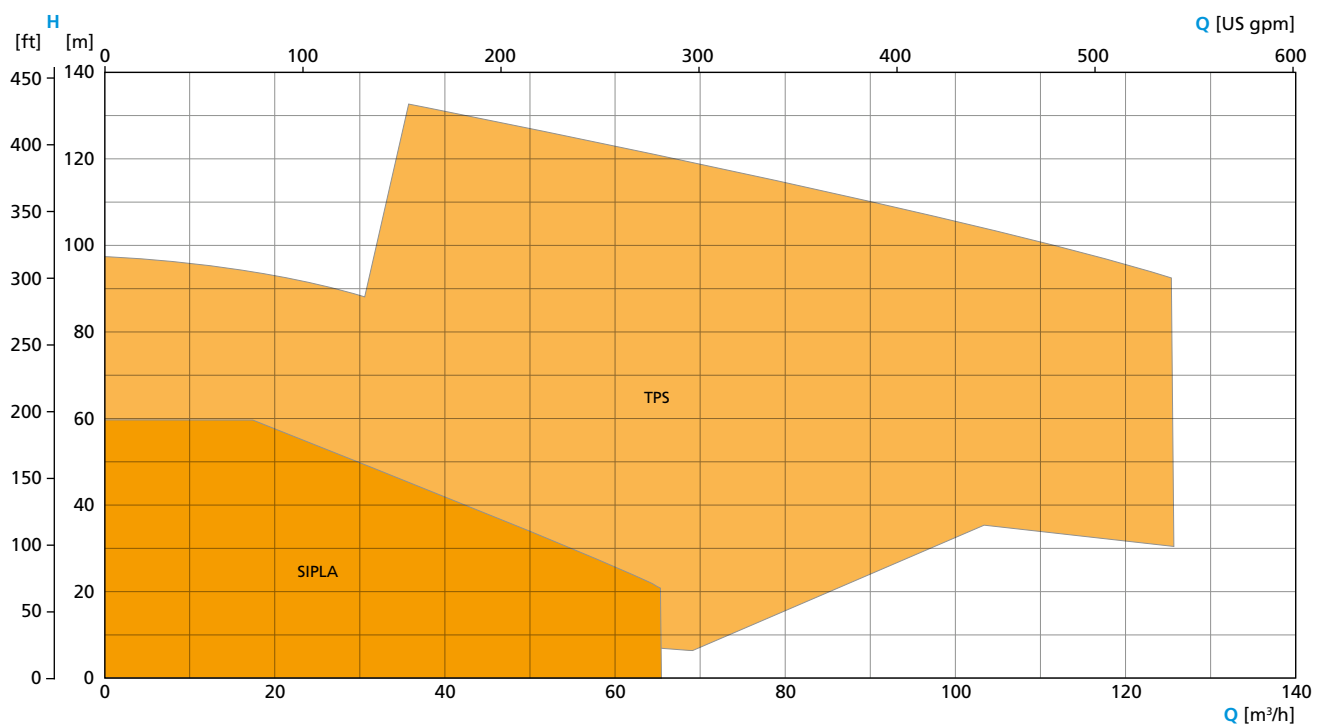


Centrifugal Pumps
2-pole, 50 Hz

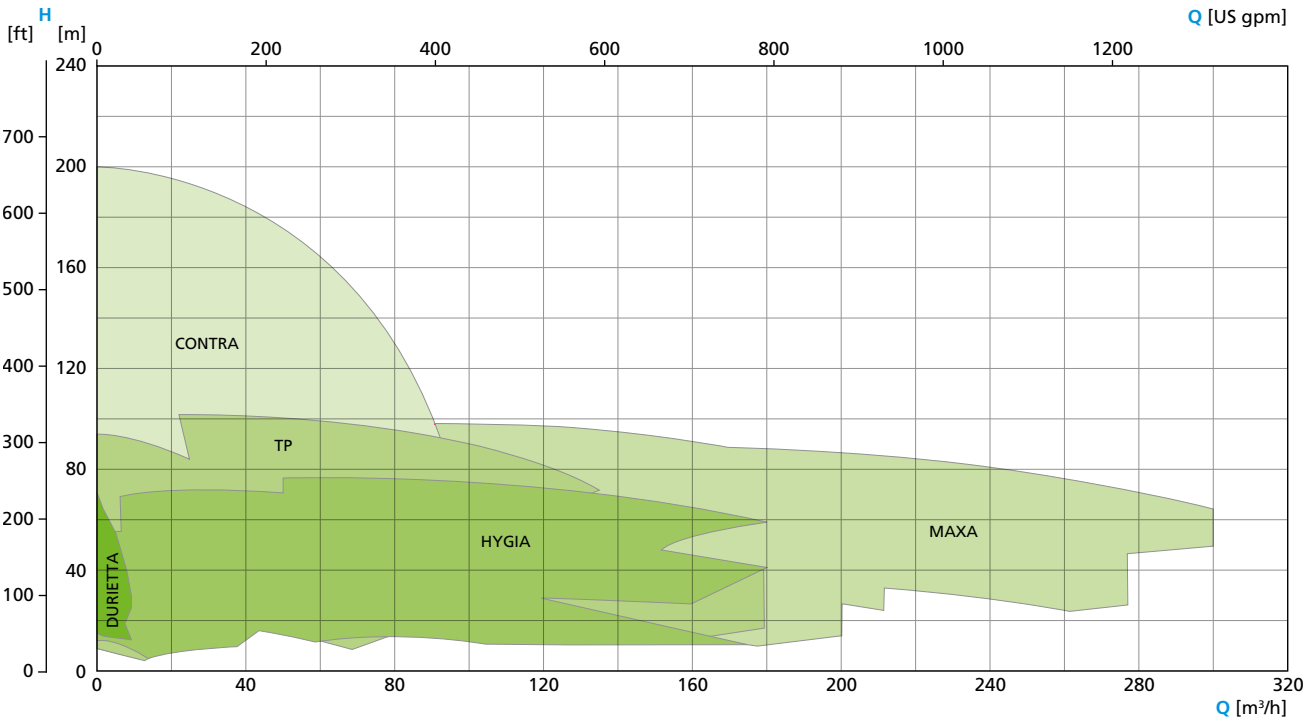


Centrifugal Pumps
2-pole, 60 Hz

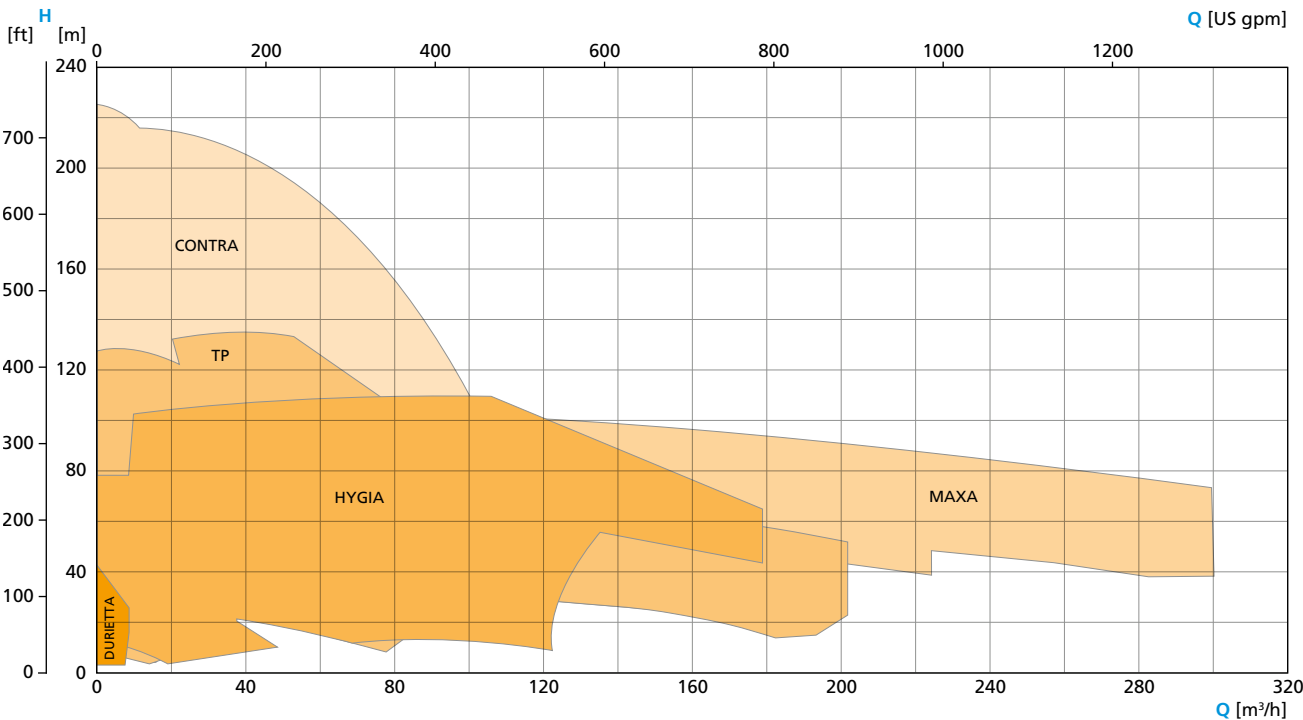


Centrifugal Pumps 4-/6-pole, 50 Hz

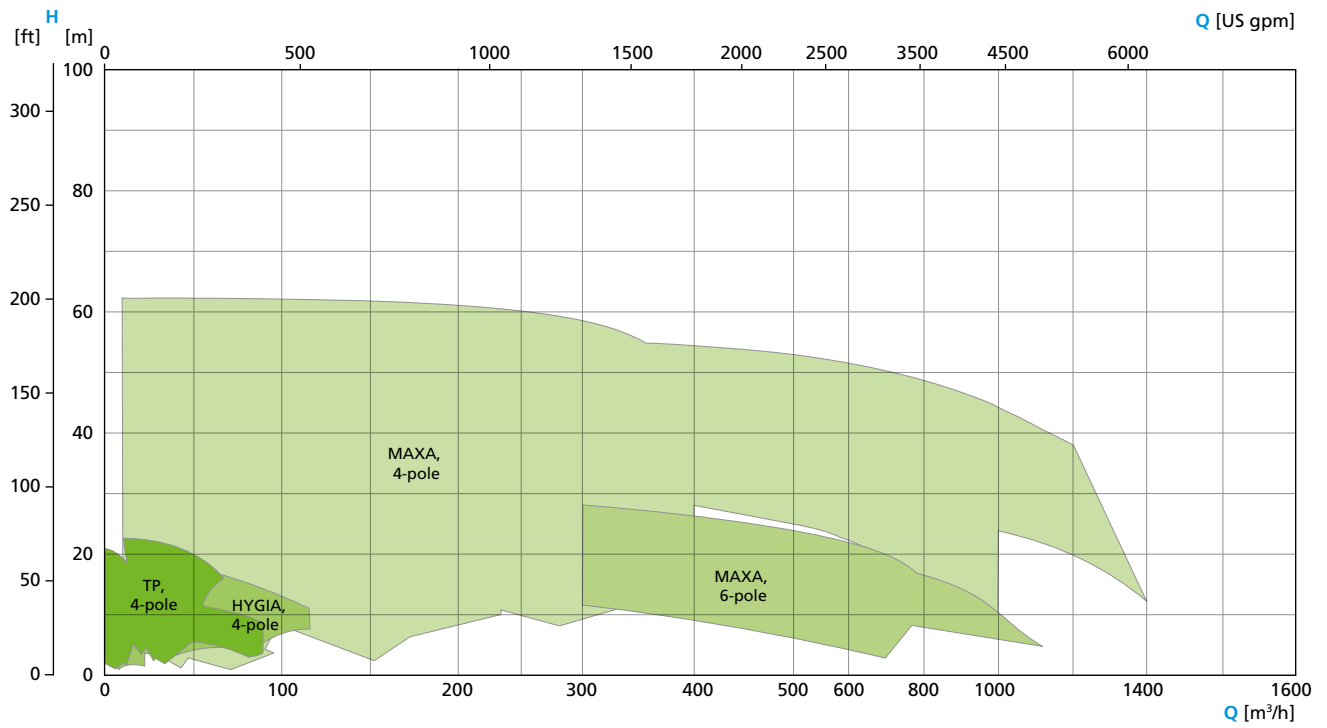


Centrifugal Pumps 4-/6-pole, 60 Hz

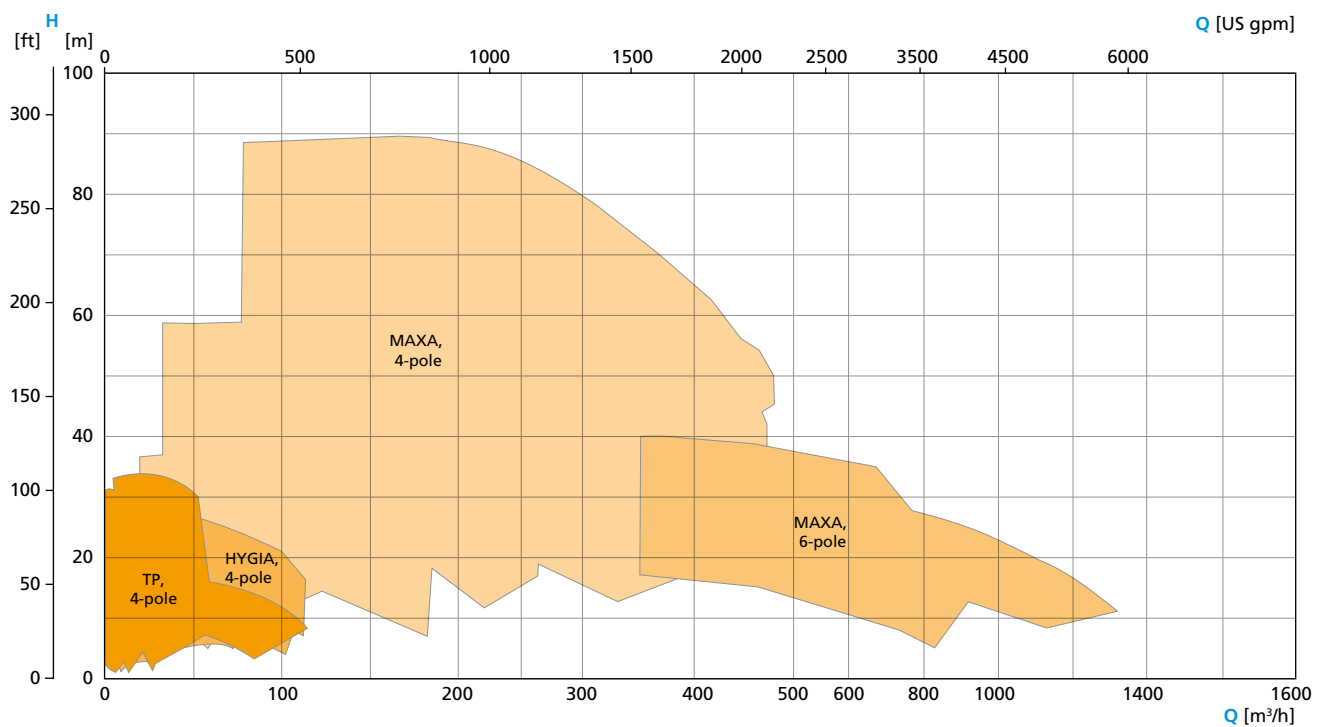


High-pressure Pumps
50 Hz

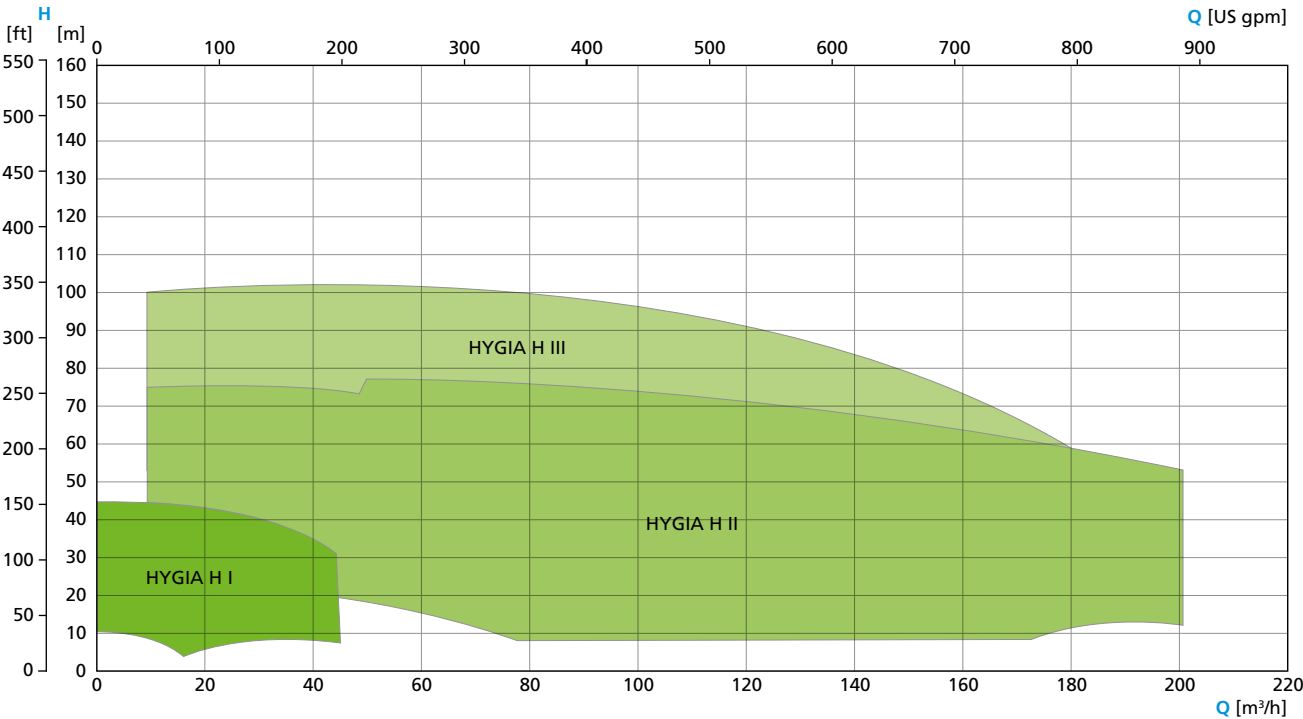


High-pressure Pumps
60 Hz

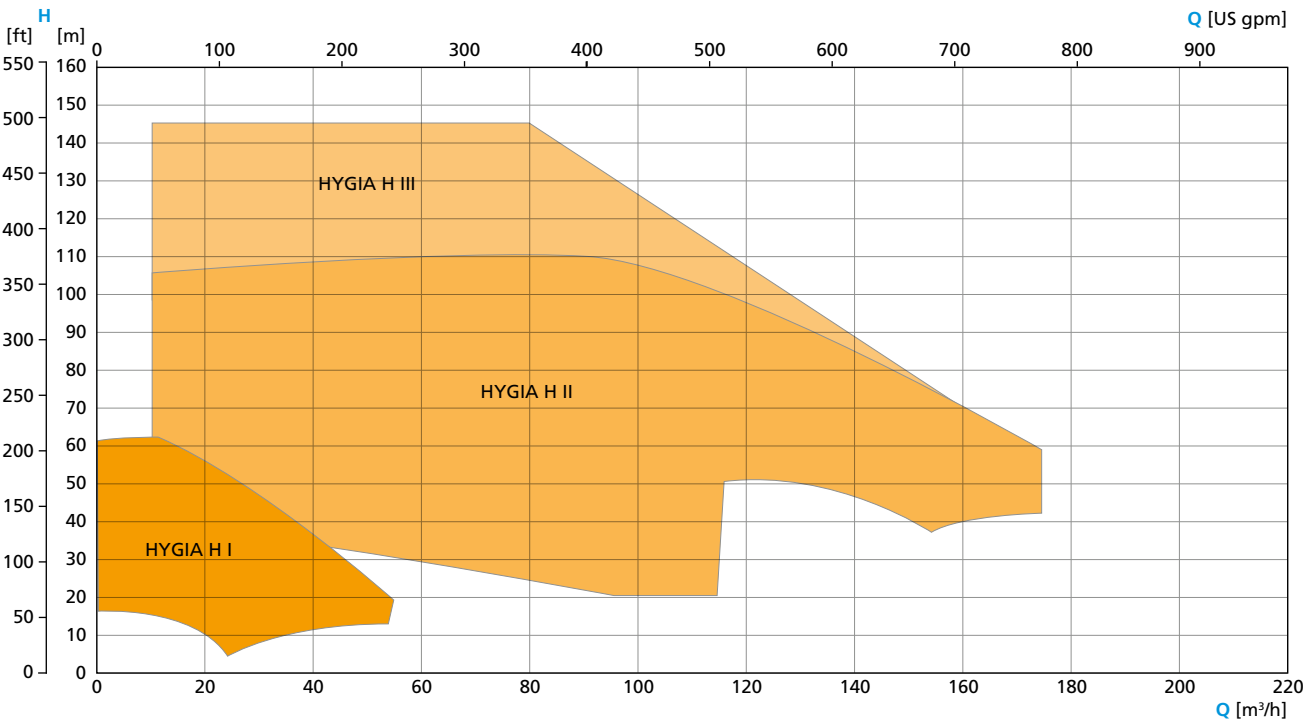

Rotary Lobe Pumps

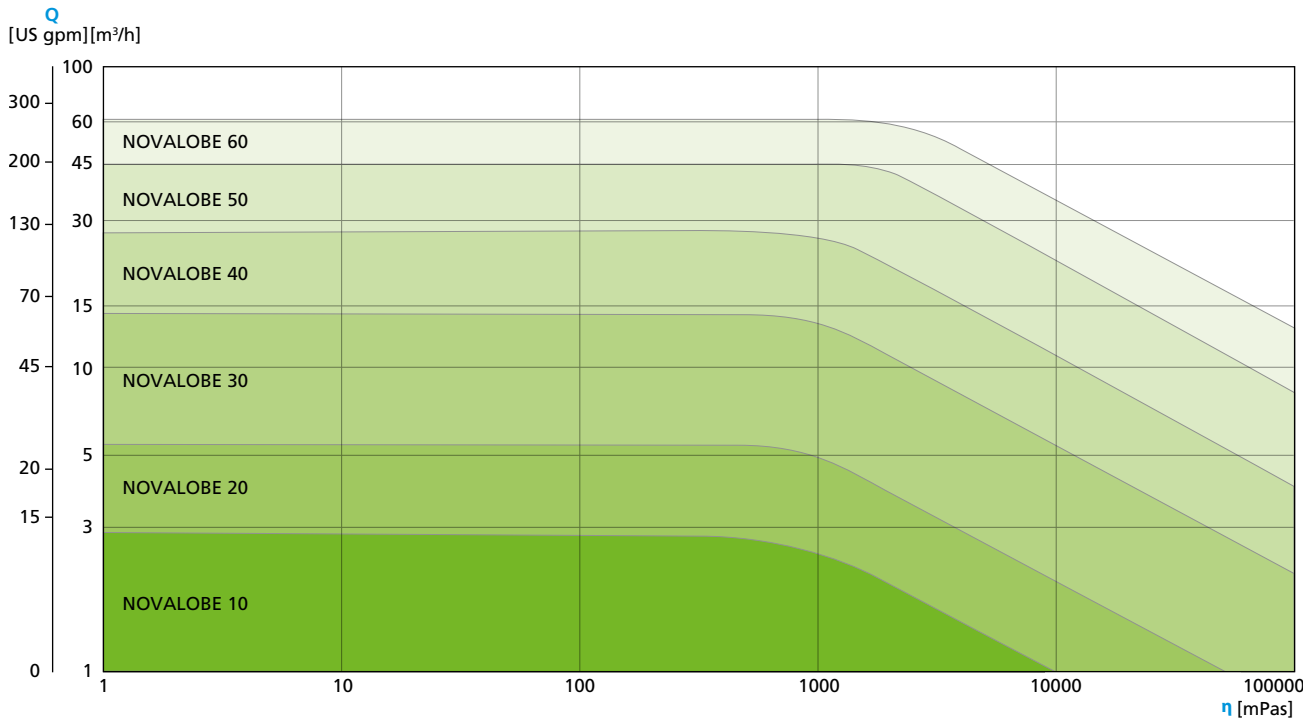

Twin Screw Pumps

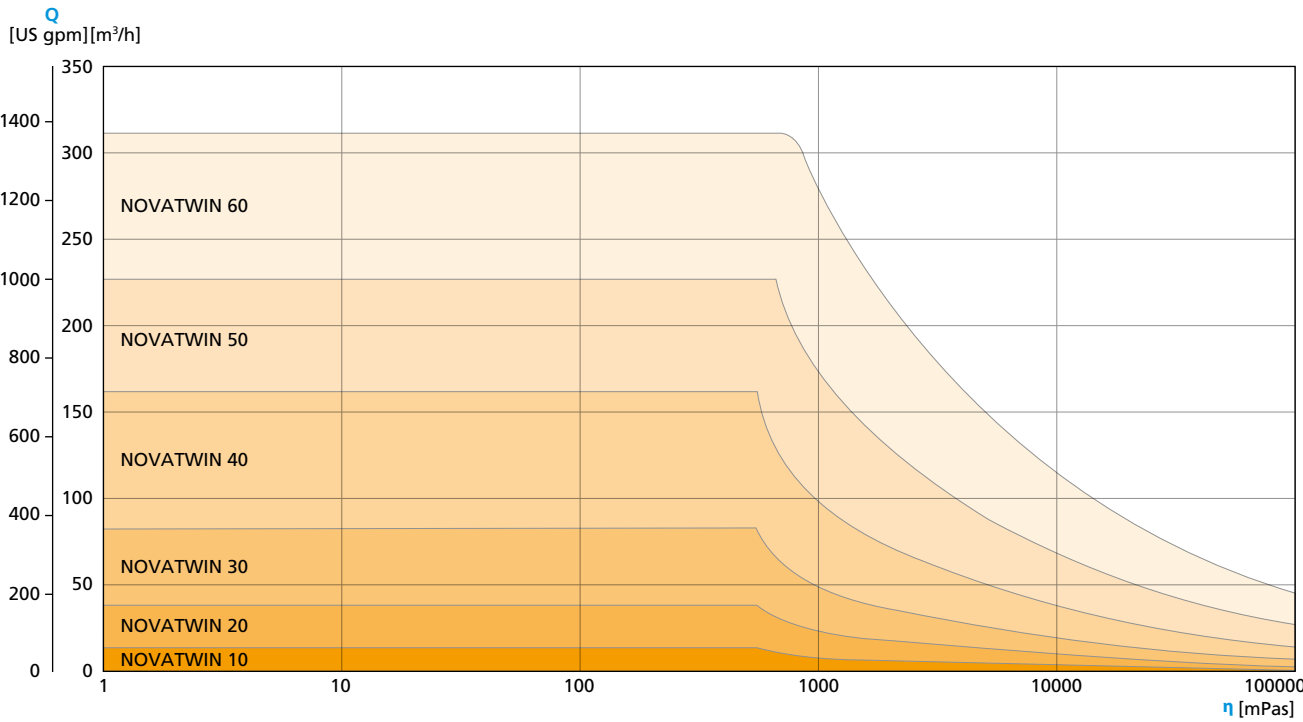

GEA Hilge HYGIA/HYGIA H

The “Swiss Knife” among the hygienic pumps. Premium quality and highest flexibility of customization ensure successful application in the food, beverage, and pharma industries.

Technical data	50 Hz	60 Hz
Max. flow rate	200 m³/h	175 m³/h
Max. head	100 m	145 m
System pressure	16 / 25 / 64 bar	



GEA Hilge HYGIA

GEA Hilge MAXA

A single-stage centrifugal pump designed for heavy-duty operation in industrial processes. The major dimensions and characteristics of these pumps correspond to DIN EN 733 and DIN EN 22858.

Technical data	50 Hz	60 Hz
Max. flow rate	1,450 m³/h	1,320 m³/h
Max. head	100 m	100 m
System pressure	10 bar	



GEA Hilge MAXA

GEA Hilge SIPLA

A single-stage self-priming side channel pump, especially suited for SIP/CIP return systems and applications with high gas content. Right- and left-hand rotation can be freely adjusted for additional application options.

Technical data	50 Hz	60 Hz
Max. flow rate	78 m³/h	64 m³/h
Max. head	47 m	60 m
System pressure	10 bar	



GEA Hilge SIPLA

Single-stage end-suction centrifugal pumps

Single-stage self-priming centrifugal pumps



GEA Hilge TP

GEA Hilge TP

The GEA Hilge TP is the smart solution for standard applications. The single-stage centrifugal pump suits a wide range of applications and offers uncompromising hygiene and quality.

Technical data	50 Hz	60 Hz
Max. flow rate	170 m³/h	205 m³/h
Max. head	90 m	135 m
System pressure	16 bar	



GEA Hilge TPS

GEA Hilge TPS

This self-priming centrifugal pump is the solution of choice especially for emptying tanks as well as for conveying products containing gas, e.g. CIP return systems.

Technical data	50 Hz	60 Hz
Max. flow rate	115 m³/h	125 m³/h
Max. head	95 m	138 m
System pressure	16 bar	

GEA Hilge CONTRA

Single- and multi-stage centrifugal pumps are available in this series. The hygienic design in every detail provides perfect solutions to numerous tasks in sterile and hygienic processes.

Technical data	50 Hz	60 Hz
Max. flow rate	100 m³/h	100 m³/h
Max. head	200 m	230 m
System pressure	25 bar	

GEA Hilge NOVALOBE

This rotary lobe pump has been specifically designed for highly viscous media – and for applications where gentle pumping is required. The pump is fully drainable with vertical ports.

Technical data	50/60 Hz
Max. displacement	2.1 l/rev
Max. differential pressure	16 bar
System pressure	10/16 bar


GEA Hilge NOVATWIN

The GEA Hilge NOVATWIN is a flexible twin screw pump. It fulfills the highest hygienic standards for gentle product handling as well as CIP with one pump only.


Technical data	50/60 Hz
Max. flow rate	310 m³/h
Max. differential pressure	25 bar
System pressure	up to 30 bar




Multi-stage
centrifugal pumps

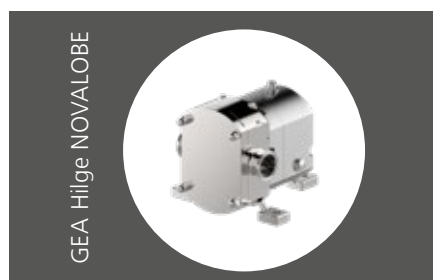

Rotary-lobe pumps
Positive displacement pumps

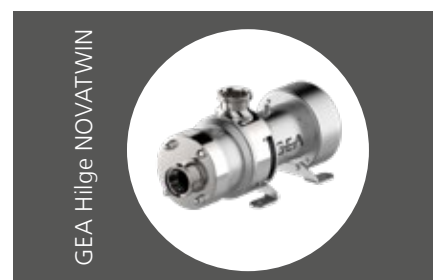

Twin-screw pumps

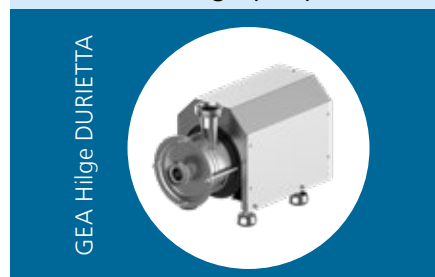**GEA Hilge DURIETTA**

This end-suction single- or multi-stage centrifugal pump in a very compact design has been created for applications with low flow rates at high flow heads.

Technical data	50 Hz	60 Hz
Max. flow rate	8 m³/h	8 m³/h
Max. head	72 m	41 m
System pressure	8 bar	

The certificates listed here are valid for corresponding GEA pump models. Pumps conforming to the requirements of the European Hygienic Engineering and Design Group (EHEDG) as well as 3-A Sanitary Standards, Inc. (3-A SSI) are available for numerous fields of application.

EHEDG certificates apply only to the specific pump type as listed. However, they may be transferred to specific other pump types, owing to identical housing designs and flow path geometries.

Moreover, independent, standardized tests have confirmed the efficient, problem-free cleaning ability of numerous pumps – for optimum safety and economic gain.

Document	GEA Hilge HYGIA / HYGIA H	GEA Hilge TP / TPS	GEA Hilge CONTRA	GEA Hilge MAXA	GEA Hilge DURIETTA	GEA Hilge SIPLA	GEA Hilge NOVALOBE	GEA Hilge NOVATWIN
3-A Sanitary Standard	•**	•						•
EHEDG certificate	•*	•*	•*				•*	•*
FDA declaration of conformity	•	•	•	•	•	•	•	•
Declaration of compliance with the order 2.1 acc. to EN 10204	•		•	•	•	•	•	•
Test report 2.2 acc. to EN 10204	•	•	•	•	•	•	•	•
Inspection certificate 3.1 acc. to EN 10204	•	•	•	•		•	•	•
EAC-Certificate	•*	•	•	•	•	•	•	•
Surface roughness test report	•	•	•	•			•	•
Delta ferrite test report	•		•				•	•
Acoustic measurement test report	•	•	•	•	•	•	•	•
USP Class VI – declaration of conformity	•	•	•			•	•	•
Certificate in acc. with the regulation (EG) No. 1935/2004	•	•	•	•	•	•	•	•
Certificate DIN EN ISO 9001:2015	•	•	•	•	•	•	•	•

Many more certificates on request

Subject to change without notice.

* registered for certification/recertification

** HYGIA H III registered for certification



Features and benefits

- Process safety, reliability, and optimal cleanability, due to sterile, cast-free stainless steel, deep-drawn or forged without blowholes (Hygienic Design).
- When installed vertically, the pump is completely self-draining without a drain valve.
- Ideally adaptable to customer needs and demanding tasks thanks to variable connections, seals and mountings.
- Precise sizing for optimum efficiency and matching of duty point thanks to selectable impeller geometries. Additional flexibility through operation on a frequency converter.
- Great flow and pressure control thanks to the steep performance curve.
- Gentle handling of shear-sensitive media thanks to very low NPSH values, minimizing cavitation and wear.
- The Adapta version enables quick and easy motor change, the pump can remain in the pipeline (requires no revalidation in pharmaceutical applications).
- Facilitated system qualification due to extensive customer- and requirement-specific documentation and certificates.
- One sealing concept for the entire centrifugal pump portfolio (single-stage, multi-stage, self-priming pumps) minimizes wearing parts logistics.

Technical Data

	GEA Hilge CONTRA I		GEA Hilge CONTRA II		GEA Hilge CONTRA III	
	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz
Flow rate	12 m³/h	15 m³/h	40 m³/h	35 m³/h	100 m³/h	
Head	100 m	100 m	160 m	230 m	230 m	215 m
System pressure	up to 25 bar					
Operating temperature	95 °C					
Sterilization temperature	150 °C (SIP)					
Max. pump efficiency	58 %					

Applications

The GEA Hilge CONTRA pump range is suitable for the following application areas and products, due to the hygienic design and material selection:

Food and beverage industry

- Breweries (beer, wort, mash, yeast, etc.)
- Dairies (milk, milk-based mixed beverages, cheese manufacturing, etc.)
- Soft drinks (fruit juice, lemonade, mineral water, etc.)
- Wine and champagne cellars
- Distilleries (mash, distillates, etc.)
- Food manufacturing (marinades, brine, cooking oil, etc.)
- Cleaning In Place systems (CIP)

Pharmaceutical and biotechnology

- Pure-water systems (WFI)
- Infusion
- Culture medium
- Blood plasma
- Lotions
- Perfumes

Design

GEA Hilge CONTRA pumps are single- and multi-stage, end-suction centrifugal pumps, designed to meet the hygienic requirements of sterile process technology.

The pump casing is made of heavy-duty, rolled and deep-drawn and forged CrNiMo steel 1.4404/1.4435, the equivalent of AISI 316L. The GEA Hilge CONTRA pumps are equipped with open diffusor casings. The O-ring seal locations for the casing and impellers meet hygienic design criteria. The vertical versions of GEA Hilge CONTRA pumps are fully self-draining through the suction port.

The special groove ensures that the seal is kept reliably in place at all times. The metallic stop allows a defined compression of the seal, ensuring gap-free sealing against the product chamber without dead legs. The pumps have a mechanical seal and a fan-cooled asynchronous motor to enclosure class IP55.

Pump connections

GEA Hilge offers the following standard connections for the GEA Hilge CONTRA pump range:

- Thread according to DIN 11851
- Flanges according to DIN 11864-2

You can find additional information in the connection selection guide on page 29.

The pumps are available in two sizes with a variety of flexible versions. The pumps are CIP- and SIP-capable in compliance with the DIN EN 12462 performance criteria. The design fulfills the following requirements:

- EHEDG (registered for recertification)
- EAC
- GMP regulations



Certification

ATEX

For use in potentially explosive areas, Adapta pumps are available. These pumps, which possess an EC declaration of conformity in accordance with the ATEX guideline 2014/34/EU, correspond to device categories 2 or 3, and can be used in zone 1 or 2.



ATEX-Symbol

Impeller

Semi-open impeller




The electro-polished, stainless steel, semi-open impeller is available in two versions, according to the application.

Impeller version	Surface finish
Cast	$R_a \leq 3.2\text{ }\mu\text{m}$
Milled	$R_a \leq 0.8\text{--}0.4\text{ }\mu\text{m}$

The impeller is suitable for low-viscosity liquids and liquids containing low content of particles.

Materials

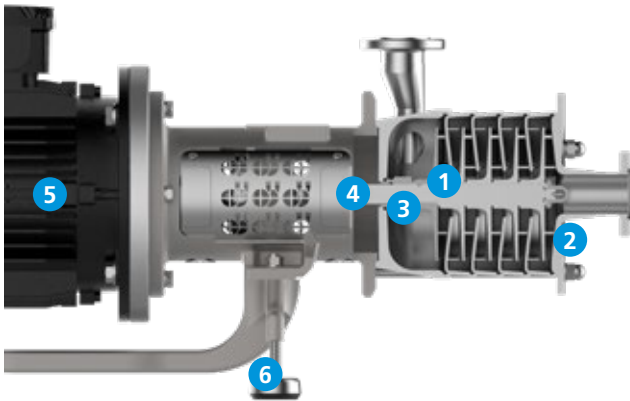

Materials overview GEA Hilge CONTRA

Item	Component	Material	No.
1	Impeller	CrNiMo steel	316L (1.4404/1.4435)
2	Pump casing	CrNiMo steel	316L (1.4404/1.4435)
3	Seal	Single mechanical seal carbon/stainless steel or SiC/SiC, other versions available on request	
4	Pump shaft	CrNiMo steel	316Ti (1.4571)
5	Motor	Aluminum	
6	Foot	Iron/stainless steel	
	Shroud	Stainless steel	

Coating

Components not made of stainless steel are provided with one of the following coatings, depending on the design:

Version	Paint/coating	Coating thickness
Primer	2K epoxy resin	30–60 µm
	KTL coating	15–20 µm
Top coating	2K epoxy resin	50–70 µm
	2K polyurethane color	60 µm
	KTL coating	15–20 µm

Surface design


Selected components are electro-polished in order to improve the surface and protect it against corrosion.

Surface	Electro-polished components
$R_a \leq 3.2 \mu\text{m}$	Casing and Impeller optional
$R_a \leq 0.8 \mu\text{m}$	Casing and Impeller
$R_a \leq 0.8 \mu\text{m}$	All components that come into contact with the pumped fluid
$R_a \leq 0.4 \mu\text{m}$	All components that come into contact with the pumped fluid

Lantern (motor stool) and cast impeller not electro-polished.

Casing design

The special groove ensures that the seal is kept reliably in place at all times. The metallic stop allows a defined compression of the seal, ensuring gap-free sealing against the product chamber without dead legs.



Casing with metallic stop

Mechanical seal

GEA Hilge offers the following seal designs:

- Single mechanical seal
- Double mechanical seal, tandem
- Double mechanical seal, back-to-back (on request)

The pumps of the GEA Hilge CONTRA range are equipped with single internal mechanical seals optimally arranged in the pump.

This ensures efficient lubrication and cooling of the mechanical seal. CIP and SIP-capability is fulfilled according to hygienic design criteria.

The standard material for the mechanical seals is carbon/stainless steel with EPDM elastomers. Other executions and materials are available on request.

For further information on mechanical seals, see page 32.

Design variants

Standard version	Description	Pump sizes		
		CONTRA I	CONTRA II	CONTRA III
GEA Hilge CONTRA Bloc	Horizontal installation, close-coupled pump, motor with extended stainless steel shaft	•	•	
GEA Hilge CONTRA Bloc-SUPER	Horizontal installation, close-coupled pump, motor with extended stainless steel shaft and stainless steel shroud	•	•	
GEA Hilge CONTRA Bloc-V	Vertical installation, close-coupled pump, motor with extended stainless steel shaft	•	•	

Bloc Design

GEA Hilge sterile and process pumps in compact Bloc design require small installation space. The motor is equipped with an extended stainless steel pump shaft.

The modular design enables numerous installation designs. Pumps in the Bloc-SUPER design are equipped with stainless steel shrouds. CONTRA pumps in bloc design are only available in size I & II.



GEA Hilge CONTRA Bloc on Cast Iron Foot



GEA Hilge CONTRA Bloc on Combi Foot



GEA Hilge CONTRA Bloc-SUPER
on Combi Foot

Standard version	Description	Pump sizes		
		CONTRA I	CONTRA II	CONTRA III
GEA Hilge CONTRA Adapta	Horizontal installation, mounted pump shaft, standard motor	•	•	
GEA Hilge CONTRA Adapta-SUPER	Horizontal installation, mounted pump shaft, standard motor with stainless steel shroud	•	•	
GEA Hilge CONTRA Adapta-V	Vertical installation, mounted pump shaft, standard motor	•	•	•
GEA Hilge CONTRA Adapta-tronic	Horizontal installation, mounted pump shaft, standard motor with integrated frequency converter	•	•	
GEA Hilge CONTRA Adapta V tronic	Vertical installation, mounted pump shaft, standard motor with integrated frequency converter	•	•	•

Adapta design

Pumps in Adapta design have a bearing bracket with a double supported shaft. The connection between the pump shaft and the motor shaft is coupled with an elastic coupling. This design enables the use of various standard motors. The pump can remain in the system during engine demounting/mounting.

Adapta-tronic pumps are equipped with an integrated frequency converter. Pumps in Adapta-SUPER design have a stainless steel motor shroud.



GEA Hilge CONTRA Adapta on Cast Iron Foot



GEA Hilge CONTRA Adapta on Combi Foot




GEA Hilge CONTRA on Vertical Stand




GEA Hilge CONTRA Adapta on Combi Foot

Terminal box position

This terminal box positions are possible for all pumps without shroud.

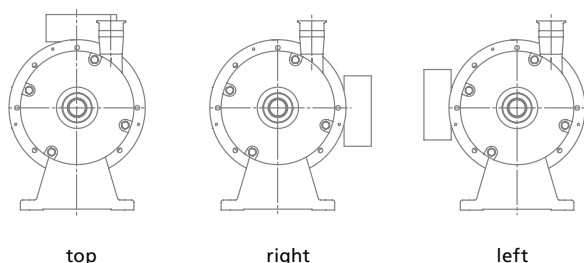

Possible terminal box positions

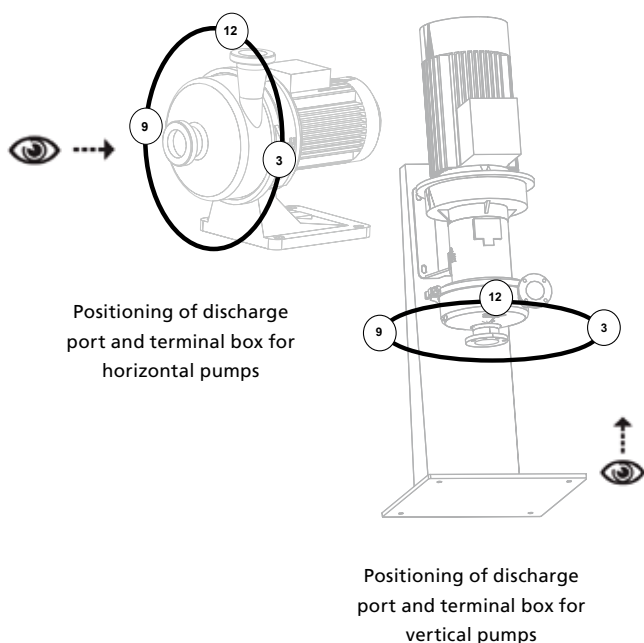Positioning of discharge port and terminal box

Positioning of discharge port and terminal box for horizontal pumps

Positioning of discharge port and terminal box for vertical pumps

Noise emissions

Measured values according to DIN EN ISO 3746 for pump units, measurement uncertainty 3 dB (A).

GEA Hilge CONTRA I

Motor power [kW]	Poles	Lpfa [dB (A)]					
		Stages					
		1	2	3	4	5	6
0.75	2	61					
1.1		61					
1.5		61	62	63			
2.2			62	62	64		
3.0			64	65	66	72	74
4.0				70	74	76	76
5.5					73	75	76

GEA Hilge CONTRA II

Motor power [kW]	Poles	Lpfa [dB (A)]			
		Stages			
		2	3	4	5
4.0	2	68			
5.5		70	72		
7.5		71	72	74	
11.0		75	76	76	78
15.0			77	77	79
18.5				78	80
22.0					82

The noise emissions of a pump are significantly affected by the given application. The values given here therefore serve only as a guide. Please contact GEA for more detailed information.

GEA Hilge CONTRA III

Motor power [kW]	Poles	Lpfa [dB (A)]		
		Stages		
		2	3	4
22.0	2	72	72	
30.0		76	76	
37.0		76	76	
45.0		76	76	76

Motors

GEA Hilge CONTRA I (2-pole)

P2 [kW]	Frame size
0.75	80
1.1	80
1.5	90S
2.2	90L
3.0	100L
4.0	112M
5.5	132S ¹

¹ 112M for Bloc Design

GEA Hilge CONTRA II (2-pole)

P2 [kW]	Frame size
4.0	112M
5.5	132S ¹
7.5	132S
11.0	160M ²
15.0	160L
18.5	160L
22.0 ³	180M

¹ 112M for Bloc Design, ² 132M for Bloc Design, ³ only for Adapta

GEA Hilge CONTRA III (2-pole)

P2 [kW]	Frame size
22.0	180M
30.0	200L
37.0	200L
45.0	225S

GEA Hilge CONTRA I/II/III

Motor data	Motor approval		IE Class		
	CEL China Energy	INMETRO Brazil	50 Hz	60 Hz	PTC
0.75	•	•	3	3	•
1.1	•	•	3	3	•
1.5	•	•	3	3	•
2.2	•	•	3	3	•
3.0	•	•	3	3	•
4.0	•	•	3	3	•
5.5	•	•	3	3	•
7.5	•	•	3	3	•
11.0	•	•	3	3	•
15.0	•	•	3	3	•
18.5	•	•	3	3	•
22.0 ³	•	•	3	3	•
30.0 ³	•	•	3	3	•
37.0 ³	•	•	3	3	•
45.0 ³	•	•	3	3	•

May differ for some motor approvals / efficiency classes.

³ only for Adapta

Motor protection

Three-phase motors should be connected to a motor-protective circuit breaker.

All three-phase mains-operated standard motors can be connected to an external frequency converter. When a frequency converter is connected, the motor isolation is often overloaded, making the motor louder than during normal operation. In addition, large motors will be exposed to bearing currents caused by the frequency converter.

The following should be taken into account when operating a frequency converter:

- In the event of special noise protection requirements, motor noise can be reduced by using a dU/dt filter between the motor and the frequency converter. For noise-sensitive environments, we recommend using a sinus filter.
- The length of the cable between motor and frequency converter affects the motor load. For this reason, check whether the cable length corresponds to the specifications issued by the supplier of the frequency converter.
- For supply voltages between 500 and 690 V, either fit a dU/dt filter to reduce voltage peaks, or use a motor with reinforced insulation.
- For supply voltages of 690 V, use a motor with reinforced insulation and fit a dU/dt filter.

Design

The motors are totally enclosed, fan-cooled standard motors with main dimensions according to IEC and DIN standards. Electrical tolerances according to IEC 34.

Pump range	Design – IEC 34-7 Horizontal installation
GEA Hilge CONTRA	IM 3001 (IM B5) IM 2001 (IM B35)

Relative air humidity: Max. 95 %

Enclosure class: IP55

Insulation class: F according to IEC 85

Ambient temperature: Max. 40 °C (standard motor)

In humid locations, the lowest drain hole in the motor must be opened. In such cases, the motor enclosure class is IP44.

Type code

GEA Hilge CONTRA	1/2	ADY	40	40	2.2	2
Pump Range						
Size/Stage						
Design						
Nominal diameter of suction port (DN)						
Nominal diameter of discharge port (DN)						
Motor power (kW)						
Number of poles						

Selecting according to the application

The table below is intended as a general guide. Selection of connection often depends on on-site conditions.


Connection		Pump size		Application																			
Type		CONTRA I / II	CONTRA III	Beverages					Food				Life science and personal care			Industrial applications						Cleaning	
				Beer	Wine	Juice	Alcohol	Soft drinks	Confectionery	Dairy products	Frying oil	Syrup	Pure water	Biotechnology products	Perfumes and lotions	Glue and paint	Purification products	Chemical products	Industrial wastewater and effluent	Surface treatment products	Biofuel	CIP	SIP
Clamps	DIN 32676/ Tri-Clamp/ASME	•								•			•	•	•							•	•
	SMS Clamps	•								•			•	•	•							•	•
Flanges	DIN 11864-2/ DIN 11853-2 flange	•	•	•	•	•	•	•	•	•	•	•	•	•	•							•	•
	APV-FN1/APV/FN1 flange	•		•	•	•	•	•	•	•	•	•										•	
	DIN EN 1092-1 flange	•		•	•	•	•	•	•	•	•	•				•	•	•	•	•	•	•	
Threads	DIN 11864-1/ 11853-1 thread	•	•	•	•	•	•	•	•	•	•	•	•	•	•							•	•
	DIN 11851 thread	•		•	•	•	•	•	•	•	•	•										•	•
	SMS thread	•		•	•	•	•	•	•	•	•	•										•	

- Commonly used connections




Design

The following tables show the design of the different connection types.




Clamps

Applications	Standard	Design	Description of the components
- Food Industry - Biotechnology / Pharmaceutical Industry	DIN 32676/ SMS		0121a: Clamp connection at pump casing 0121: Clamp connection 0410: Profile gasket 0501: Clamp ring

Threads

Applications	Standard	Design	Description of the components
Aseptic Thread			
Biotechnology / Pharmaceutical Industry	DIN 11864-1/ 11853-1		0120a: Threaded connection at pump casing 0120: Threaded connection 0412: O-ring 0925: Grooved union nut
Thread			
- Beverage Industry - Food Industry	DIN 11851		0120a: Threaded connection at pump casing 0120: Threaded connection 0411: Joint ring 0925: Grooved union nut
- Beverage Industry - Food Industry	SMS (ISO 2037)		0120a: Threaded connection at pump casing 0120: Threaded connection 0411: Joint ring 0925: Grooved union nut

Flanges

Applications	Standard	Design	Description of the components
Aseptic Flange			
• Biotechnology / Pharmaceutical Industry • Beverage Industry	DIN 11864-2/ 11853-2 Form A		0122a: Flanged connection at pump casing 0122: Flanged connection 0412: O-ring 0901: Hexagon head screw 0920: Hexagon nut
Flange			
• Food Industry • Beverage Industry	APV-FN1/ APV-FG1		0122a: Flanged connection at pump casing 0122: Flanged connection 0410: Profile gasket 0901: Hexagon head screw 0920: Hexagon nut
Kremo Flange			
• Industrial Applications	DIN EN 1092-1 (loose)		0122a: Flanged connection at pump casing 0122: Flanged connection 0400: Gasket 0901: Hexagon head screw 0920: Hexagon nut

In order to ensure correct operation (depending on the application and the medium), single or double mechanical seals can be supplied. The single mechanical seal is an inboard seal. Double mechanical seals are available as tandem or back-to-back execution. All seals are optimally placed inside the pump.

This ensures efficient lubrication and cooling of the mechanical seal, while also ensuring CIP (Cleaning In Place) and SIP (Sterilization In Place) capability. The standard material for the mechanical seals are carbon/stainless steel or SiC/SiC with EPDM or FKM (Viton) elastomers.

Mechanical seals





The operating range of the seal depends on the liquid, the type of seal, the operating pressure and the liquid temperature.

The seal types described below are standard seal types; other seals are available on request.

Version	Material pairs stationary seat/seal face/O-rings	Max. pressure	Max. temperature
Open spring	Carbon/stainless steel/EPDM Carbon/stainless steel/FKM Silicon carbide/silicon carbide/EPDM Silicon carbide/silicon carbide/FKM	10 bar	–20 to 80 °C
Encapsulated spring	Carbon/stainless steel/EPDM Silicon carbide/silicon carbide/EPDM Silicon carbide/silicon carbide/FFKM Silicon carbide/silicon carbide/FKM	25 bar	–20 to 100 °C

Special seals available in different materials up to 25 bar.

Mechanical seal arrangements

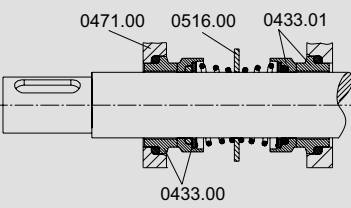Arrangement	Design	Components	Seal characteristics
Single mechanical seal with encapsulated spring		0433.00: Mechanical seal a: Contact surface impeller side	• Encapsulated spring • Easy to clean • Optimal position inside the pump • Bidirectional
Double mechanical seal, tandem		0433.00: Mechanical seal, product side 0433.01: Mechanical seal, atmosphere side 0516.00: Locating ring a: Contact surface impeller side	• Tandem arrangement • Open conical spring • Pressure-less flushing (seal cartridge) • No dry running • Mechanical seals are lubricated and cooled
Double mechanical seal, tandem		0433.00: Mechanical seal, product side 0433.01: Mechanical seal, atmosphere side 0471.00: Seal cover 0516.00: Locating ring a: Contact surface impeller side	• Tandem arrangement • Product-side spring encapsulated • Pressure-less flushing (seal cartridge) • No dry running • Mechanical seals are lubricated and cooled
Double mechanical seal, back-to-back*		0433.00: Mechanical seal, product side 0433.01: Mechanical seal, atmosphere side 0471.00: Seal cover 0516.00: Locating ring	• Back-to-back arrangement • Overpressure in barrier fluid space (seal cartridge) • No product leakage into the surrounding atmosphere • No dry running • Mechanical seals are lubricated and cooled


* on request

Mechanical installation

GEA Hilge CONTRA

The pumps of the GEA Hilge CONTRA Adapta series can be installed horizontally and vertically.

When installing vertically, always install the motor facing upwards.

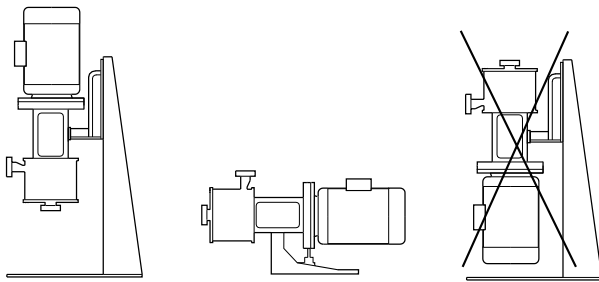


Installation GEA Hilge CONTRA Adapta

The pumps must be installed in such a way that strain from the pipework is not transferred to the pump casing. When installed outdoors, the motor must be provided with a suitable cover to avoid condensation on the electronic components and to protect pump and motor against the direct effects of the elements.

Space requirements

Horizontal installation


- Pumps fitted with motors up to and including 4 kW require a 300 mm clearance behind the motor.
- Pumps fitted with motors of 5.5 kW and up require at least a 1 meter clearance above the motor and 300 mm behind it to allow the use of lifting equipment.

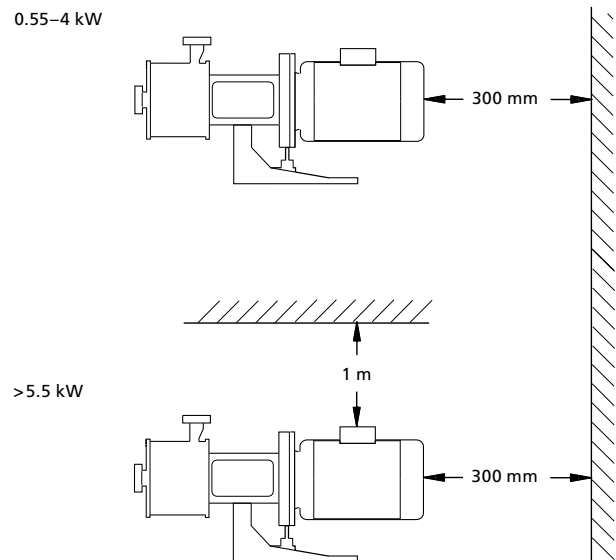

Horizontal installation

Vertical installation

- Pumps fitted with motors up to and including 4 kW require a 300 mm clearance above the motor.
- Pumps fitted with motors of 5.5 kW and up require at least a 1 meter clearance above the motor to allow the use of lifting equipment.

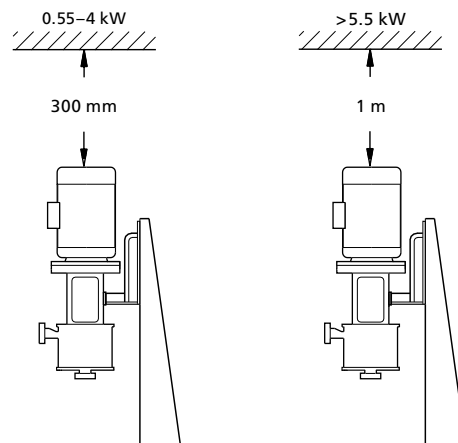

Vertical installation


Elimination of noise and vibrations

In order to achieve optimum operation and minimum noise and vibration, consider vibration dampening of the pump. Generally, always consider this for pumps with motors above 11 kW. Smaller motors, however, may also cause undesirable noise and vibration.

Noise and vibration are generated by the rotation in the motor and pump and by the flow in the pipework and fittings. The effect on the environment is subjective and depends on correct installation and the state of the remaining system.

Foundation

Vibration dampening is best achieved by installing the pumps on a plane and rigid concrete foundation.

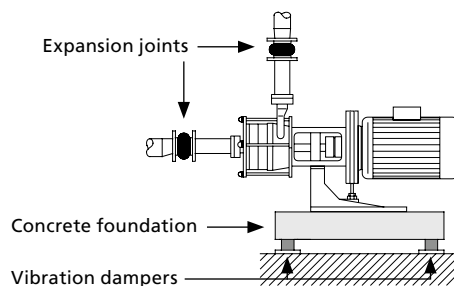

Example of a pump foundation

As a guideline, the weight of the concrete foundation should be 1.5 times the pump weight.

Vibration dampers

To prevent vibrations from being transmitted to the building, we recommend that you isolate the pump foundation from buildings by means of vibration dampers.

The selection of the correct vibration dampers requires the following data:

- Forces that will be transmitted through the vibration dampers
- Motor speed, taking speed control into account as needed
- Required dampening in % (suggested value is 70 %)

The right damper varies from installation to installation, and the wrong damper may increase the vibration level. Vibration dampers should therefore be sized by the supplier.

Expansion joints

If the pump is installed on a pedestal with vibration dampers, expansion joints must always be fitted on the pipeline connections. This is important to prevent the pump from “hanging” in the connections.

Install expansion joints in order to:

- Absorb expansion/contractions in the pipework caused by variable liquid temperatures
- Reduce mechanical strains that occur in connection with pressure surges in the plant
- Isolate mechanical structure-borne noise in the pipework (only rubber bellows expansion joints)

Note: Do not install expansion joints to compensate for inaccuracies in the pipework such as center displacement of flanges.

Fit expansion joints at a distance of at least 1 to 1.5 times the nominal flange diameter away from the pump on the suction as well as on the discharge side. This will prevent the development of turbulence in the expansion joints, resulting in better suction conditions and a minimum pressure loss on the discharge side.

We always recommend expansion joints with limiting rods for flanges larger than DN 100.

The pipes should be anchored so that they do not stress the expansion joints and the pump. Follow the supplier's instructions and pass them on to advisers or pipe installers.

The values for density and viscosity given here are ratios and can deviate in practice.

Application beer

				Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem
Altbier	< 100	1,000	1	aeE (up to 10 bar), aiH (from 10 bar)	–
Beer					
Beer mix					
Berliner Weisse					
Bock beer					
Craft beer					
Export beer					
Full beer (Vollbier)					
Green beer					
Herb beer					
Lager					
Light beer					
Martzen (Märzen)					
Non-alcoholic beer					
Pils					
Pilsener					
Ringed (Kräusen)					
Wheat beer					
Cold wort	< 40	< 1,050	< 5	aeE (up to 10 bar), aiH (from 10 bar)	–
Original wort	< 100	< 1,050	< 5	–	kiE/aeE
Hop extract (dissolved)					
Lees	40–90	< 1,050	< 5	–	kiE/aeE
Mash (beer)					
Lauter wort	40–115	< 1,050	< 5	–	kiE/aeE
Hot wort					
Crop yeast	< 20	< 1,050	< 100	aeE	–
Pitching yeast					
Yeast	< 60	< 1,050	< 5	aeE	–
Enzymes (watery dissolution)					
Lactic acid, con. < 50 % (C ₃ H ₆ O ₃)	< 100	< 1,100	< 5	kiV (up to 16 bar), kil (up to 25 bar)	–
Lactic acid, con. > 50 % (C ₃ H ₆ O ₃)	< 100	< 1,210	< 5	kiV (up to 16 bar), kil (up to 25 bar)	–

Application water

				Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem
Iced water	–4 to +3	< 1,000	1	kiE (up to 10 bar), kiH (from 10 bar)	–
Cold water	< 110	< 1,000	1	aeE (up to 10 bar), aiH (from 10 bar)	–
Demineralized water (Not for sterile applications)					
Drinking water					
Flushing water					
Hot water					
Mineral water					
Process water					
Service water					
Water					

Application wine/sparkling wine

				Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem
Champagne	< 35	< 1,000	1	aeE (up to 10 bar), aiH (from 10 bar)	–
Cherry wine					
Cider					
Cidre					
Dry sparkling wine					
Fruit wine					
Prosecco					
Red wine					
Rosé wine					
Sparkling wine					
Strawberry wine					
White wine					
Wine					
Young wine					
Dessert wine	< 35	< 1,050	15	aeE (up to 10 bar), aiH (from 10 bar)	–
Dessert wine, late-harvest wine					
Drape must (w/o. particles)					
Ice wine	< 35	< 1,050	100	aeE (up to 10 bar), aiH (from 10 bar)	–
Wine lees					
Wine yeast					
Mash (wine)	< 35	< 1,050	5	aeE (up to 10 bar), aiH (from 10 bar)	–

Application coffee/tea/cocoa

				Mechanical seal* material product side / atmospheric side		
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem	Encapsulated seal for vacuum application
Coffee	< 125	1,000	1	aeE	–	
Coffee extract	< 80–100	< 1,200	< 250	–	kiV/aeV	x
Tea	< 125	1,000	1	aeE	–	
Fruit tea / flavored tea	< 125	1,000	1	aeE	–	
Cocoa drink	< 40	1,020	< 10	aeE	–	

* aeE: carbon/stainless steel/EPDM, aeV: carbon/stainless steel/Viton, aiH: carbon/SiC/EPDM (USP-Class VI), kiE: SiC/SiC/EPDM, kiH: SiC/SiC/EPDM (USP-Class VI), kil: SiC/SiC/Viton (USP Class VI), kiV: SiC/SiC/Viton, WDR: lip seal. The elastomer of the static seals equals the elastomer of the mechanical seals.

Application milk

				Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem
Buttermilk	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	> 55 – < 100	< 1,050	< 5	–	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
UHT milk	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	> 55 – < 100	< 1,050	< 5	–	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Yoghurt milk	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	> 55 – < 100	< 1,050	< 5	–	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Kefir	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	> 55 – < 100	< 1,050	< 5	–	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Cheese milk	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	> 55 – < 100	< 1,050	< 5	–	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Skimmed milk	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	> 55 – < 100	< 1,050	< 5	–	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Skimmed milk concentrate	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	> 55 – < 100	< 1,050	< 5	–	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Milk	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	> 55 – < 100	< 1,050	< 5	–	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Milk concentrate	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	> 55 – < 100	< 1,050	< 5	–	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Lactic culture	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	> 55 – < 100	< 1,050	< 5	–	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Milk mix	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	> 55 – < 100	< 1,050	< 5	–	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Whey	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	> 55 – < 100	< 1,050	< 5	–	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Raw milk	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	> 55 – < 100	< 1,050	< 5	–	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Pre-stirred yoghurt	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	> 55 – < 100	< 1,050	< 5	–	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Sour milk	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	> 55 – < 100	< 1,050	< 5	–	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)

				Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem
Sour cream with thickening agents	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	> 55 – < 100	< 1,050	< 5	–	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Full cream milk	< 55	< 1,050	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	> 55 – < 100	< 1,050	< 5	–	aeE/aeE (up to 10 bar), aiH/aeE (from 10 bar)
Coffee cream	< 55	< 1,100	< 40	aeV (up to 10 bar), ail (from 10 bar)	–
	> 55 – < 100	< 1,100	< 20	–	aeV/aeV (up to 10 bar), ail/aeV (from 10 bar)
Whipping cream	< 55	< 1,100	< 40	aeV (up to 10 bar), ail (from 10 bar)	–
	> 55 – < 100	< 1,100	< 20	–	aeV/aeV (up to 10 bar), ail/aeV (from 10 bar)
Sour cream	< 55	< 1,100	< 40	aeV (up to 10 bar), ail (from 10 bar)	–
	> 55 – < 100	< 1,100	< 20	–	aeV/aeV (up to 10 bar), ail/aeV (from 10 bar)
Cream	< 55	< 1,100	< 40	aeV (up to 10 bar), ail (from 10 bar)	–
	> 55 – < 100	< 1,100	< 20	–	aeV/aeV (up to 10 bar), ail/aeV (from 10 bar)
Condensed milk	< 55	< 1,100	< 40	aeV (up to 10 bar), ail (from 10 bar)	–
	> 55 – < 100	< 1,100	< 20	–	aeV/aeV (up to 10 bar), ail/aeV (from 10 bar)

Application vinegar / sauces / marinade

				Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem
Soy sauce	5–95	1,250	25	kiE	–
	95.1–125	1,250	25	–	kiE/aeE
Cider vinegar	60	1,020	1	aeE	–
Herb-flavored vinegar					
Vinegar					
Wine vinegar	60	1,050	1	aeV	–
Vinegar essence					

* aeE: carbon/stainless steel/EPDM, aeV: carbon/stainless steel/Viton, aiH: carbon/SIC/EPDM (USP-Class VI), ail: carbon/SIC/Viton (USP-Class VI), kiE: SIC/SIC/EPDM, WDR: lip seal. The elastomer of the static seals equals the elastomer of the mechanical seals.

Application non-alcoholic drink

				Mechanical seal* material product side / atmospheric side		
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem	Encapsulated seal
Apple juice	< 70	1,040	< 50	aeE	–	
	< 70	1,040	< 50	aeE	–	x
	< 70	1,040	< 50	kiE	–	x
	> 70 – < 95	1,040	< 10	–	kiE/aeE	
	> 70 – < 95	1,040	< 10	–	kiE/aeE	x
Apricot-mango juice	< 70	1,040	< 50	aeE	–	
	< 70	1,040	< 50	aeE	–	x
	< 70	1,040	< 50	kiE	–	x
	> 70 – < 95	1,040	< 10	–	kiE/aeE	
	> 70 – < 95	1,040	< 10	–	kiE/aeE	x
Cherry juice	< 70	1,040	< 50	aeE	–	
	< 70	1,040	< 50	aeE	–	x
	< 70	1,040	< 50	kiE	–	x
	> 70 – < 95	1,040	< 10	–	kiE/aeE	
	> 70 – < 95	1,040	< 10	–	kiE/aeE	x
Cola	< 100	1,040	< 5	aeE	–	
	< 100	1,040	< 5	aeE	–	
Concentrated lemon juice, without pulp and granules	< 70	1,040	25	kiV	–	
Cranberry juice	< 70	1,040	< 50	aeE	–	
	< 70	1,040	< 50	aeE	–	x
	< 70	1,040	< 50	kiE	–	x
	> 70 – < 95	1,040	< 10	–	kiE/aeE	
	> 70 – < 95	1,040	< 10	–	kiE/aeE	x
Multivitamin juice	< 70	1,040	< 50	kiE	–	x
Fruit juice, with granules	< 70	1,040	< 50	kiE	–	x
Fruit juice, with pulp		1,040	< 50	aeE	–	x
Fruit juice, with pulp and with granules	> 70 – < 95	1,040	< 10	–	kiE/aeE	x
Fruit juice, without pulp	< 70	1,040	< 50	aeE	–	
	> 70 – < 95	1,040	< 10	–	kiE/aeE	
Grape juice	< 70	1,040	< 50	aeE	–	
	< 70	1,040	< 50	aeE	–	x
	< 70	1,040	< 50	kiE	–	x
	> 70 – < 95	1,040	< 10	–	kiE/aeE	
	> 70 – < 95	1,040	< 10	–	kiE/aeE	x
Iced tea	< 100	1,040	< 5	aeE	–	
Lemon juice, with pulp and granules	< 70	1,040	25	kiV	–	x
Lemon juice, without pulp and granules	< 70	1,040	25	aeV	–	
Lemonade	< 100	1,040	< 5	aeE	–	
	< 100	1,040	< 5	aeE	–	
Mineral water	< 100	1,040	< 5	aeE	–	
	< 100	1,040	< 5	aeE	–	
Multivitamin juice	< 70	1,040	< 50	aeE	–	
	< 70	1,040	< 50	aeE	–	x
	> 70 – < 95	1,040	< 10	–	kiE/aeE	
	> 70 – < 95	1,040	< 10	–	kiE/aeE	x
Orange juice	< 70	1,040	< 50	aeE	–	
	< 70	1,040	< 50	aeE	–	x
	< 70	1,040	< 50	kiE	–	x
	> 70 – < 95	1,040	< 10	–	kiE/aeE	
	> 70 – < 95	1,040	< 10	–	kiE/aeE	x
Peach- / passion fruit juice	< 70	1,040	< 50	aeE	–	
	< 70	1,040	< 50	aeE	–	x
	< 70	1,040	< 50	kiE	–	x
	> 70 – < 95	1,040	< 10	–	kiE/aeE	
	> 70 – < 95	1,040	< 10	–	kiE/aeE	x

				Mechanical seal* material product side / atmospheric side		
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem	Encapsulated seal
Raspberry- / Strawberry juice	< 70	1,040	< 50	aeE	–	
	< 70	1,040	< 50	aeE	–	x
	< 70	1,040	< 50	kiE	–	x
	> 70 – < 95	1,040	< 10	–	kiE/aeE	
	> 70 – < 95	1,040	< 10	–	kiE/aeE	x
Vegetable juice, with pulp and granules	< 70	1,050	< 50	kiV	–	x
	> 70 – < 95	1,050	< 10	–	kiV/aeV	x
Vegetable juice, without pulp and granules	< 70	1,050	< 50	aeV	–	
	> 70 – < 95	1,050	< 10	–	kiV/aeV	

Application concentrated fruit juice

					Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Concentration [Brix]	Single	Tandem
Concentrated fruit juice	5–90	1,150	related to temperature	to 25°	aeE (up to 10 bar), aiH (from 10 bar)	–
	5–40	1,200		26–49°	aeE (up to 10 bar), aiH (from 10 bar)	–
	40.1–90	1,200		26–49°	–	aeE/aeE
	15–40	1,230		50°	aeE (up to 10 bar), aiH (from 10 bar)	–
	40.1–90	1,230		50°	–	aeE/aeE
	15–40	1,260		55°	aeE (up to 10 bar), aiH (from 10 bar)	–
	40.1–90	1,260		55°	–	aeE/aeE
	15–40	1,290		60°	aeE (up to 10 bar), aiH (from 10 bar)	–
	40.1–90	1,290		60°	–	aeE/aeE
	15–40	1,320		65°	aeE (up to 10 bar), aiH (from 10 bar)	–
	40.1–90	1,320		65°	–	aeE/aeE
	20–40	1,350		70°	aeE (up to 10 bar), aiH (from 10 bar)	–
	40.1–90	1,350		70°	–	aeE/aeE

* aeE: carbon/stainless steel/EPDM, aeV: carbon/stainless steel/Viton, aiH: carbon/SiC/EPDM (USP-Class VI), kiE: SiC/SiC/EPDM, kiH: SiC/SiC/EPDM (USP-Class VI), kiV: SiC/SiC/Viton, WDR: lip seal. The elastomer of the static seals equals the elastomer of the mechanical seals.

Application oil

				Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem
Cocoa butter	10–30	940	< 80	aeV	–
Coconut oil / copra oil					
Corn oil					
Cotton seed oil					
Linseed oil					
Olive oil					
Palm oil					
Peanut oil					
Pumpkin seed oil					
Rape oil / rapeseed oil					
Safflower oil	30.1–125	920	< 40	aeV	–
Sesame oil					
Soy oil / soy bean oil					
Sunflower oil					
Walnut oil					
Wheat germ oil					
Chip fat	< 170	900	10	aeV	–
Butter oil (liquid)	> 45–120	860	45	aeV	–
Lard (liquid)	> 45–120	860	45	aeV	–
Liquid butter	> 35–120	860	45	aeV	–
Fish oil	10–125	950	< 100	aeV	–
Whale oil	10–125	950	< 100	aeV	–
Cod liver (cod-liver oil)	10–125	950	< 100	aeV	–
Mineral oil	10–100			aeV	–
Motor oil					
Petroleum					
Derv	10–100	850	< 15	aeV	–
Diesel oil					
Oil-in-water emulsion	0–100	1,000	< 50	aeV	–

Application spirits

					Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Concentration [%]	Single	Tandem
Spirits	40	< 1,000	< 5		aeE (up to 10 bar), aiH (from 10 bar)	–
	< 50	< 1,150	< 150		–	kiE/aeE
	< 100	< 1,150	< 100		–	kiE/aeE
	< 78	< 1,000	1	< 10	aeE (up to 10 bar), aiH (from 10 bar)	–
	< 78	900	1	< 50	aeE (up to 10 bar), aiH (from 10 bar)	–
	< 78	800	1	< 98	aeE (up to 10 bar), aiH (from 10 bar)	–

Application cleaning in place CIP

					Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Concentration [%]	Single	Tandem
CIP liquid (concentration approx. 5%)	< 100	1,050	< 5	< 5	aeE (up to 10 bar), aiH (from 10 bar)	–

Application sugar syrup

					Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Concentration [Brix]	Single	Tandem
Sugar syrup without crystals	5–90	1,150	related to temperature	to 25°	aeE (up to 10 bar), aiH (from 10 bar)	–
	5–40	1,200		26–49°	aeE (up to 10 bar), aiH (from 10 bar)	–
	40.1–90	1,200		26–49°	–	aeE/aeE
	15–40	1,230		50°	aeE (up to 10 bar), aiH (from 10 bar)	–
	40.1–90	1,230		50°	–	aeE/aeE
	15–40	1,260		55°	aeE (up to 10 bar), aiH (from 10 bar)	–
	40.1–90	1,260		55°	–	aeE/aeE
	15–40	1,290		60°	aeE (up to 10 bar), aiH (from 10 bar)	–
	40.1–90	1,290		60°	–	aeE/aeE
	15–40	1,320		65°	aeE (up to 10 bar), aiH (from 10 bar)	–
	40.1–90	1,320		65°	–	aeE/aeE
	20–40	1,350		70°	aeE (up to 10 bar), aiH (from 10 bar)	–
	40.1–90	1,350		70°	–	aeE/aeE
	20–40	1,360		72,7°	aeE (up to 10 bar), aiH (from 10 bar)	–
	40.1–90	1,360		72,7°	–	aeE/aeE
	5–90	1,150		to 25°	kiE (up to 10 bar), kiH (10 – 16 bar)	–
	5–40	1,200		26–49°	kiE (up to 10 bar), kiH (10 – 16 bar)	–
	40.1–90	1,200		26–49°	–	kiE/aeE
	15–40	1,230		50°	kiE (up to 10 bar), kiH (10 – 16 bar)	–
	40.1–90	1,230		50°	–	kiE/aeE
	15–40	1,260		55°	kiE (up to 10 bar), kiH (10 – 16 bar)	–
	40.1–90	1,260		55°	–	kiE/aeE
	15–40	1,290		60°	kiE (up to 10 bar), kiH (10 – 16 bar)	–
	40.1–90	1,290		60°	–	kiE/aeE
	15–40	1,320		65°	kiE (up to 10 bar), kiH (10 – 16 bar)	–
	40.1–90	1,320		65°	–	kiE/aeE
	20–40	1,350		70°	kiE (up to 10 bar), kiH (10 – 16 bar)	–
	40.1–90	1,350		70°	–	kiE/aeE

* aeE: carbon/stainless steel/EPDM, aeV: carbon/stainless steel/Viton, aiH: carbon/SiC/EPDM (USP-Class VI), kiE: SiC/SiC/EPDM, kiH: SiC/SiC/EPDM (USP-Class VI), WDR: lip seal. The elastomer of the static seals equals the elastomer of the mechanical seals.

Application chemicals

					Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Concentration [%]	Single	Tandem
Caustic soda (NaOH)	< 60	= Concentration		< 15	kiE	–
	< 60	= Concentration		> 15 – < 50	–	kiE/aeE
	> 60 – < 101	= Concentration		< 12	kiE	–
	> 60 – < 101	= Concentration		< 12 – < 50	–	kiE/aeE
Peracetic / peroxyacetic (C ₂₄ O ₃)	< 60	< 1,020	< 1	< 5	kiV	–
	< 60	< 1,060	< 5	> 5.1 – < 15	kiK	–
Phosphoric acid (H ₃ PO ₄)	< 40	1 % = 1,004 5 % = 1,026	< 5	< 15	kiV	–
	> 40 – < 85	10 % = 1,053 20 % = 1,114	< 5	< 15	–	kiV/aeV
	< 85	35 % = 1,216 45 % = 1,293	< 5	> 15 – < 45	–	kiV/aeV
	< 85		< 5	> 15 – < 45	–	kiV/aeV
Nitric acid (HNO ₃)	0–20	1 % = 1,004	5	0–10	kiV	–
	20.1–40	10 % = 1,055	5	0–10	–	kiV/aeV
	0–40	20 % = 1,115	5	10.1–20	–	kiV/aeV
	40.1–85	30 % = 1,180	5	0–20	–	kiV/aeV
	0–85	40 % = 1,245	5	20.1–40	–	kiV/aeV
Sulfuric acid (H ₂ SO ₄)	< 20	< 1,1	< 25	< 12	–	kiV/aeV
	< 70	< 1,08	< 20	< 12	–	kiK/aeV
High test peroxide (H ₂ O ₂) Hydrogen peroxide	< 90	< 1,050	2	2–3	aeV	–
	< 90	< 1,150	2	< 40	kiV	–
	< 90	< 1,300	2	< 60	kiV	–
	< 60	< 1,450	2	< 100	–	kiV/aeV
Brine solution Common salt solution Sodium chloride (NaCl)	< 30	< 1,050	< 5	< 5	aeE	–
	30.1–40	< 1,050	< 5	< 5	kiE	–
	< 40	< 1,080	< 5	5.1–10	kiE	–
	< 40	< 1,200	< 25	10.1–25	–	kiE/aeE
Curing brine (butchery)	< 40	1,200	< 300	< 20	kiE	–
Salting brine (cheese dairy)	< 40	1,300	< 60	20–30	–	kiE/aeE
Ammonia/ammoniac (NH ₃)	< 40	800	< 5		–	aeE/aeE
Caustic potash (KOH) Potassium hydroxide	< 60	< 1,100	< 5	< 10	kiE	–
	< 60	< 1,200	< 5	< 20	kiE	–
Glycerol Propanetriol	80	< 1,100	< 5	0–40	aeV	–
	80	< 1,160	< 20	40.1–60	aeV	–
	80	< 1,200	< 50	60.1–75	aeV	–
	80	< 1,220	< 100	75.1–85	aeV	–
Propylene-glycol (C ₃ H ₈ O ₂)	0–80	1,010	< 5	1–20	kiV	–
	–5–80	1,020	< 20	20.1–50	kiV	–
	–10–80	1,040	< 150	50.1–75	kiV	–
	–10–0	1,060	< 255	75.1–100	kiV	–
	0.1–80	1,050	< 150	75.1–100	kiV	–
Ethanediol Ethylene-glycol (C ₂ H ₆ O ₂)	0–80	1,030	< 5	1–20	kiE	–
	–5–80	1,060	< 20	20.1–50	kiE	–
	–10–80	1,090	< 40	50.1–75	kiE	–
	–10–0	1,120	< 100	75.1–100	kiE	–
	0.1–80	1,110	< 65	75.1–100	kiE	–
Citric acid (C ₆ H ₈ O ₇) Natural citric acid	5–80	1 % = 1,005 10 % = 1,020	< 15	< 10	kiV	–
	5–80	10.1 % = 1,020 20 % = 1,050 30 % = 1,100 50 % = 1,260	< 15	10.1–50	kiV	–
Acetic acid (C ₂ H ₄ O ₂)	5–80	1,010	1	< 10	aeE	–
	5–100	1,050	1	10.1–100	–	aeK/aeE


Application waste water


				Mechanical seal* material product side / atmospheric side	
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem
Dirty water Laboratory waste water Sewage Waste water, without solids (not abrasive), pH < 7	< 80	1,000	1	kiV	–
Dirty water Laboratory waste water Sewage Waste water, without solids (not abrasive), pH < 7	< 80	1,000	1	kiE	–
Landfill seepage water, not ozoniferous, chloride content max. 350mg/l	< 50	1,000	1	kiV	–
Landfill seepage water, not ozoniferous, no chloride content	< 50	1,000	1	kiV	–
Landfill seepage water, ozoniferous, max. 300 ppB, chloride content max. 350mg/l	< 50	1,000	1	kiK	–
Landfill seepage water, ozoniferous, max. 300 ppB, no chloride content	< 50	1,000	1	kiK	–
Activated sludge	< 60	1,000	1	kiV	–

Application pharma

				Mechanical seal* material product side / atmospheric side		
Subgroup	Temperature [°C]	Density [kg/m³]	Viscosity [mPas]	Single	Tandem	Encapsulated seal
Purified water (PW)	0–125	1,000	1	kiH	–	
Highly purified water (HPW) Ultra-purified water (UPW) Water for injection (WFI)	0–125	1,000	1	kiH-C1/ooH-C1	–	

* aeE: carbon/stainless steel/EPDM, aeK: carbon/stainless steel/FFKM, aeV: carbon/stainless steel/Viton, kiE: SiC/SiC/EPDM, kiH: SiC/SiC/EPDM (USP-Class VI), kiV: SiC/SiC/Viton, ooH: SiC/SiC/EPDM (USP-Class VI). The elastomer of the static seals equals the elastomer of the mechanical seals.

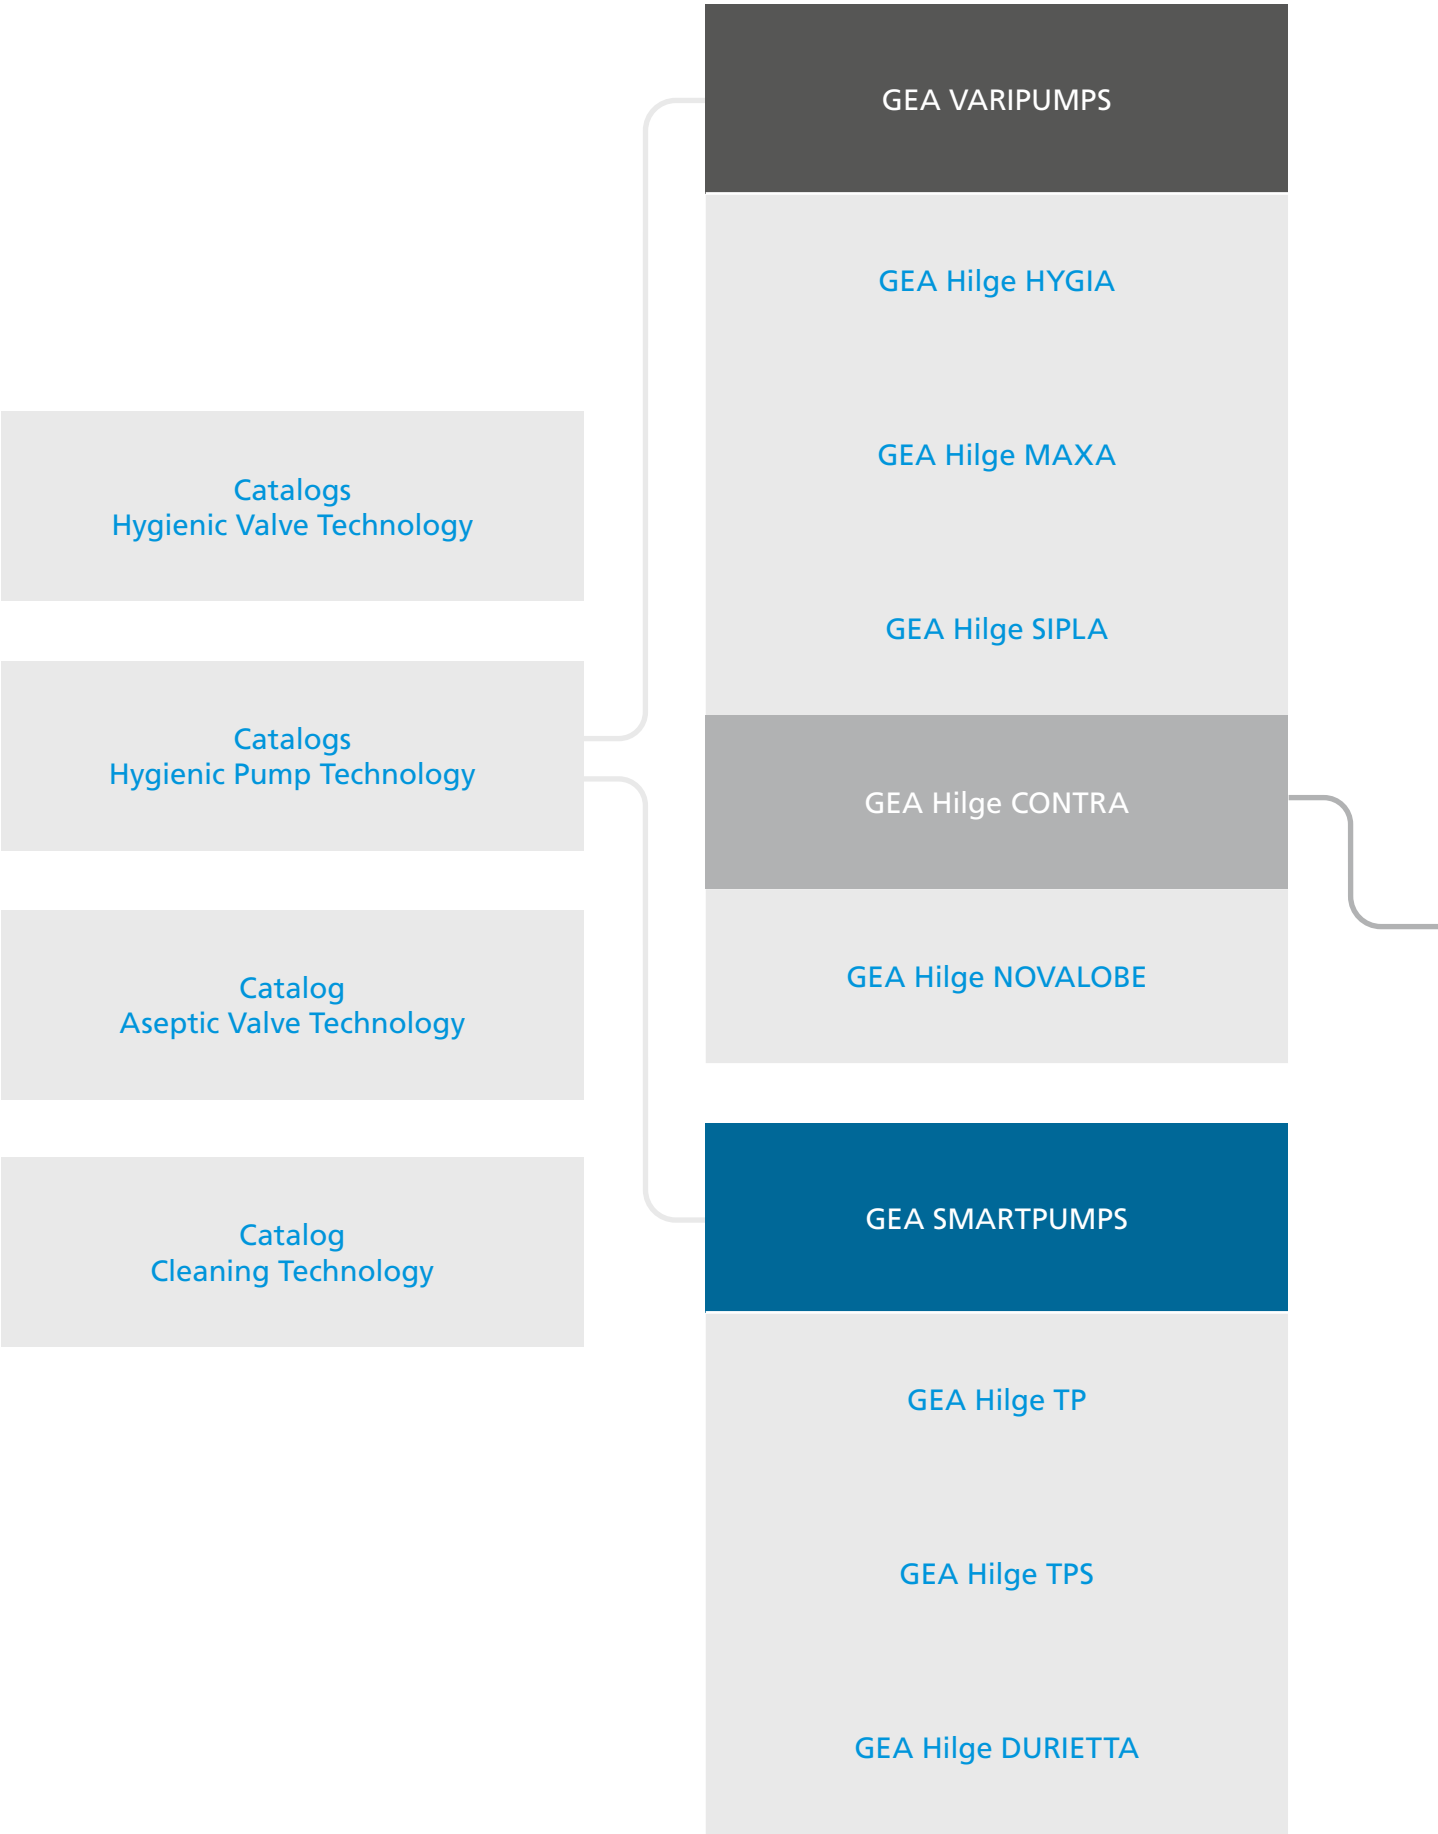

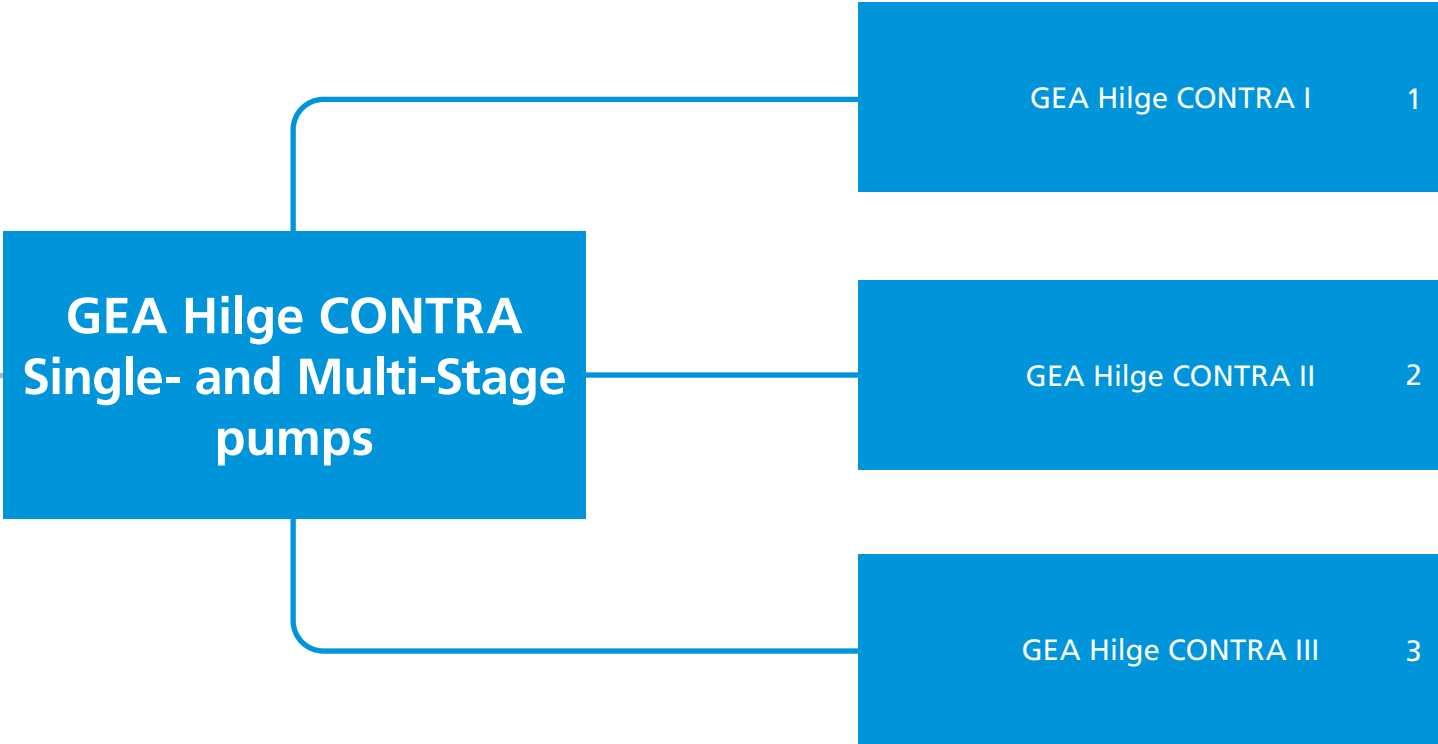

Nominal width Connection type	1-stage					2-stage			
	DIN	25/25	40/25	40/40	50/40	25/25	40/25	40/40	50/40
	ISO	33.7/ 33.7	48.3/ 33.7	48.3/ 48.3	60.3/ 48.3	33.7/ 33.7	48.3/ 33.7	48.3/ 48.3	60.3/ 48.3
	OD	1"/1"	1½"/1"	1½"/1½"	2"/1½"	1"/1"	1½"/1"	1½"/1½"	2"/1½"
Threaded connection DIN 11851 (DIN)	a ₁	117.0	121.0	127.0	128.0	143.0	147.0	153.0	154.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	160.0	160.0	160.0	160.0	160.0	160.0	160.0	160.0
	e ₅	106.0	120.0	120.0	132.0	106.0	120.0	120.0	132.0
	h ₃	119.0	133.0	133.0	145.0	119.0	133.0	133.0	145.0
Threaded connection DIN 11864-1 Pipe range A (DIN)*	a ₁	114.0	119.0	125.0	125.0	140.0	145.0	151.0	151.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	157.0	157.0	158.0	158.0	157.0	157.0	158.0	158.0
	e ₅	106.0	119.0	119.0	133.0	106.0	119.0	119.0	133.0
	h ₃	116.0	131.0	131.0	141.0	116.0	131.0	131.0	141.0
Threaded connection SMS International (OD)	a ₁	103.0	108.0	114.0	114.0	129.0	134.0	140.0	140.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	150.0	150.0	147.0	147.0	150.0	150.0	147.0	147.0
	e ₅	(A)				(A)			
	h ₃	(A)				(A)			
Clamp DIN 32676 Pipe range A (DIN)*	a ₁	109.5	109.5	115.5	115.5	135.5	135.5	141.5	141.5
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	152.5	152.5	148.5	148.5	152.5	152.5	148.5	148.5
	e ₅	113.5	123.5	123.5	133.5	113.5	123.5	123.5	133.5
	h ₃	111.5	121.5	121.5	131.5	111.5	121.5	121.5	131.5
Clamp DIN 32676 Pipe range B (ISO)**	a ₁	112.5	112.5	(E)	(E)	138.5	138.5	(E)	(E)
	f ₂	4.0	4.0			4.0	4.0		
	h ₂	149.5	149.5			149.5	149.5		
	e ₅	101.5	120.5			101.5	120.5		
	h ₃	99.5	118.5			99.5	118.5		
Clamp DIN 32676 Pipe range C (OD)***	a ₁	109.5	109.5	115.5	115.5	135.5	135.5	141.5	141.5
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	152.5	152.5	163.0	163.0	152.5	152.5	163.0	163.0
	e ₅	99.7	118.8	118.8	144.2	99.7	118.8	118.8	144.2
	h ₃	97.7	116.8	116.8	142.2	97.7	116.8	116.8	142.2
Clamp SMS (OD)	a ₁	116.5	116.5	122.5	122.5	142.5	142.5	148.5	148.5
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	159.5	159.5	155.5	155.5	159.5	159.5	155.5	155.5
	e ₅	(A)				(A)			
	h ₃	(A)				(A)			
Grooved flange DIN 11864-2 Pipe range A (DIN)*	a ₁	112.0	112.0	118.0	118.0	138.0	138.0	144.0	144.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	155.0	155.0	151.0	151.0	155.0	155.0	151.0	151.0
	e ₅	112.5	122.5	122.5	132.5	112.5	122.5	122.5	132.5
	h ₃	113.7	123.7	123.7	133.7	113.7	123.7	123.7	133.7
Grooved flange DIN 11864-2 Pipe range B (ISO)**	a ₁	115.0	115.0	(E)	(E)	141.0	141.0	(E)	(E)
	f ₂	4.0	4.0			4.0	4.0		
	h ₂	151.0	151.0			151.0	151.0		
	e ₅	100.5	119.5			100.5	119.5		
	h ₃	101.7	120.7			101.7	120.7		
Flange EN1092-1 PN10 Kremo (ISO)	a ₁	101.0	101.0	107.0	106.0	127.0	127.0	133.0	132.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	144.0	144.0	140.0	140.0	144.0	144.0	140.0	140.0
	e ₅	(A)				(A)			
	h ₃	(A)				(A)			
Flange connection APV-FG / 3.1-PN10 (DIN)	a ₁	112.0	112.0	118.0	118.0	138.0	138.0	144.0	144.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	155.0	155.0	151.0	151.0	155.0	155.0	151.0	151.0
	e ₅	(A)				(A)			
	h ₃	(A)				(A)			
Flange connection APV-FG / 3.1-PN25 (DIN)	a ₁	112.0	112.0	110.0	110.0	138.0	138.0	136.0	136.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	155.0	155.0	143.0	143.0	155.0	155.0	143.0	143.0
	e ₅	(A)				(A)			
	h ₃	(A)				(A)			

Tolerances according to DIN EN 735 Connection dimensions for centrifugal pumps.

* For pipes according to DIN 11866 series A

** For pipes according to DIN 11866 series B

*** For pipes according to DIN 11866 series C (pipe dimensions according to ASME BPE)

(A) On request

(E) On request. Not fully drainable in vertical position

(N/A) Not Available

Nominal width Connection type	3-stage					4-stage			
	DIN	25/25	40/25	40/40	50/40	25/25	40/25	40/40	50/40
	ISO	33.7/ 33.7	48.3/ 33.7	48.3/ 48.3	60.3/ 48.3	33.7/ 33.7	48.3/ 33.7	48.3/ 48.3	60.3/ 48.3
	OD	1"/1"	1½"/1"	1½"/1½"	2"/1½"	1"/1"	1½"/1"	1½"/1½"	2"/1½"
Threaded connection DIN 11851 (DIN)	a ₁	169.0	173.0	179.0	180.0	195.0	199.0	205.0	206.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	160.0	160.0	160.0	160.0	160.0	160.0	160.0	160.0
	e ₅	106.0	120.0	120.0	132.0	106.0	120.0	120.0	132.0
	h ₃	119.0	133.0	133.0	145.0	119.0	133.0	133.0	145.0
Threaded connection DIN 11864-1 Pipe range A (DIN)*	a ₁	166.0	171.0	177.0	177.0	192.0	197.0	203.0	203.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	157.0	157.0	158.0	158.0	157.0	157.0	158.0	158.0
	e ₅	106.0	119.0	119.0	133.0	106.0	119.0	119.0	133.0
	h ₃	116.0	131.0	131.0	141.0	116.0	131.0	131.0	141.0
Threaded connection SMS International (OD)	a ₁	155.0	160.0	166.0	166.0	181.0	186.0	192.0	192.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	150.0	150.0	147.0	147.0	150.0	150.0	147.0	147.0
	e ₅	(A)				(A)			
	h ₃	(A)				(A)			
Clamp DIN 32676 Pipe range A (DIN)*	a ₁	161.5	161.5	167.5	167.5	187.5	187.5	193.5	193.5
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	152.5	152.5	148.5	148.5	152.5	152.5	148.5	148.5
	e ₅	113.5	123.5	123.5	133.5	113.5	123.5	123.5	133.5
	h ₃	111.5	121.5	121.5	131.5	111.5	121.5	121.5	131.5
Clamp DIN 32676 Pipe range B (ISO)**	a ₁	164.5	164.5	(E)	(E)	190.5	190.5	(E)	(E)
	f ₂	4.0	4.0			4.0	4.0		
	h ₂	149.5	149.5			149.5	149.5		
	e ₅	101.5	120.5			101.5	120.5		
	h ₃	99.5	118.5			99.5	118.5		
Clamp DIN 32676 Pipe range C (OD)***	a ₁	161.5	161.5	167.5	167.5	187.5	187.5	193.5	193.5
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	152.5	152.5	163.0	163.0	152.5	152.5	163.0	163.0
	e ₅	99.7	118.8	118.8	144.2	99.7	118.8	118.8	144.2
	h ₃	97.7	116.8	116.8	142.2	97.7	116.8	116.8	142.2
Clamp SMS (OD)	a ₁	168.5	168.5	174.5	174.5	194.5	194.5	200.5	200.5
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	159.5	159.5	155.5	155.5	159.5	159.5	155.5	155.5
	e ₅	(A)				(A)			
	h ₃	(A)				(A)			
Grooved flange DIN 11864-2 Pipe range A (DIN)*	a ₁	164.0	164.0	170.0	170.0	190.0	190.0	196.0	196.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	155.0	155.0	151.0	151.0	155.0	155.0	151.0	151.0
	e ₅	112.5	122.5	122.5	132.5	112.5	122.5	122.5	132.5
	h ₃	113.7	123.7	123.7	133.7	113.7	123.7	123.7	133.7
Grooved flange DIN 11864-2 Pipe range B (ISO)**	a ₁	167.0	167.0	(E)	(E)	193.0	193.0	(E)	(E)
	f ₂	4.0	4.0			4.0	4.0		
	h ₂	151.0	151.0			151.0	151.0		
	e ₅	100.5	119.5			100.5	119.5		
	h ₃	101.7	120.7			101.7	120.7		
Flange EN1092-1 PN10 Kremo (ISO)	a ₁	153.0	153.0	159.0	158.0	179.0	179.0	185.0	184.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	144.0	144.0	140.0	140.0	144.0	144.0	140.0	140.0
	e ₅	(A)				(A)			
	h ₃	(A)				(A)			
Flange connection APV-FG / 3.1-PN10 (DIN)	a ₁	164.0	164.0	170.0	170.0	190.0	190.0	196.0	196.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	155.0	155.0	151.0	151.0	155.0	155.0	151.0	151.0
	e ₅	(A)				(A)			
	h ₃	(A)				(A)			
Flange connection APV-FG / 3.1-PN25 (DIN)	a ₁	164.0	164.0	162.0	162.0	190.0	190.0	188.0	188.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	155.0	155.0	143.0	143.0	155.0	155.0	143.0	143.0
	e ₅	(A)				(A)			
	h ₃	(A)				(A)			

Tolerances according to DIN EN 735 Connection dimensions for centrifugal pumps.

* For pipes according to DIN 11866 series A

** For pipes according to DIN 11866 series B

*** For pipes according to DIN 11866 series C (pipe dimensions according to ASME BPE)

(A) On request

(E) On request. Not fully drainable in vertical position

(N/A) Not Available

Nominal width Connection type	5-stage					6-stage			
	DIN	25/25	40/25	40/40	50/40	25/25	40/25	40/40	50/40
	ISO	33.7/ 33.7	48.3/ 33.7	48.3/ 48.3	60.3/ 48.3	33.7/ 33.7	48.3/ 33.7	48.3/ 48.3	60.3/ 48.3
	OD	1"/1"	1½"/1"	1½"/1½"	2"/1½"	1"/1"	1½"/1"	1½"/1½"	2"/1½"
Threaded connection DIN 11851 (DIN)	a ₁	221.0	225.0	231.0	232.0	247.0	251.0	257.0	258.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	160.0	160.0	160.0	160.0	160.0	160.0	160.0	160.0
	e ₅	106.0	120.0	120.0	132.0	106.0	120.0	120.0	132.0
	h ₃	119.0	133.0	133.0	145.0	119.0	133.0	133.0	145.0
Threaded connection DIN 11864-1 Pipe range A (DIN)*	a ₁	218.0	223.0	229.0	229.0	244.0	249.0	255.0	255.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	157.0	157.0	158.0	158.0	157.0	157.0	158.0	158.0
	e ₅	106.0	119.0	119.0	133.0	106.0	119.0	119.0	133.0
	h ₃	116.0	131.0	131.0	141.0	116.0	131.0	131.0	141.0
Threaded connection SMS International (OD)	a ₁	207.0	212.0	218.0	218.0	233.0	238.0	244.0	244.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	150.0	150.0	147.0	147.0	150.0	150.0	147.0	147.0
	e ₅	(A)				(A)			
	h ₃	(A)				(A)			
Clamp DIN 32676 Pipe range A (DIN)*	a ₁	213.5	213.5	219.5	219.5	239.5	239.5	245.5	245.5
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	152.5	152.5	148.5	148.5	152.5	152.5	148.5	148.5
	e ₅	113.5	123.5	123.5	133.5	113.5	123.5	123.5	133.5
	h ₃	111.5	121.5	121.5	131.5	111.5	121.5	121.5	131.5
Clamp DIN 32676 Pipe range B (ISO)**	a ₁	216.5	216.5	(E)	(E)	242.5	242.5	(E)	(E)
	f ₂	4.0	4.0			4.0	4.0		
	h ₂	149.5	149.5			149.5	149.5		
	e ₅	101.5	120.5			101.5	120.5		
	h ₃	99.5	118.5			99.5	118.5		
Clamp DIN 32676 Pipe range C (OD)***	a ₁	213.5	213.5	219.5	219.5	239.5	239.5	245.5	245.5
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	152.5	152.5	163.0	163.0	152.5	152.5	163.0	163.0
	e ₅	99.7	118.8	118.8	144.2	99.7	118.8	118.8	144.2
	h ₃	97.7	116.8	116.8	142.2	97.7	116.8	116.8	142.2
Clamp SMS (OD)	a ₁	220.5	220.5	226.5	226.5	246.5	246.5	252.5	252.5
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	159.5	159.5	155.5	155.5	159.5	159.5	155.5	155.5
	e ₅	(A)				(A)			
	h ₃	(A)				(A)			
Grooved flange DIN 11864-2 Pipe range A (DIN)*	a ₁	216.0	216.0	222.0	222.0	242.0	242.0	248.0	248.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	155.0	155.0	151.0	151.0	155.0	155.0	151.0	151.0
	e ₅	112.5	122.5	122.5	132.5	112.5	122.5	122.5	132.5
	h ₃	113.7	123.7	123.7	133.7	113.7	123.7	123.7	133.7
Grooved flange DIN 11864-2 Pipe range B (ISO)**	a ₁	219.0	219.0	(E)	(E)	245.0	245.0	(E)	(E)
	f ₂	4.0	4.0			4.0	4.0		
	h ₂	151.0	151.0			151.0	151.0		
	e ₅	100.5	119.5			100.5	119.5		
	h ₃	101.7	120.7			101.7	120.7		
Flange EN1092-1 PN10 Kremo (ISO)	a ₁	205.0	205.0	211.0	210.0	231.0	231.0	237.0	236.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	144.0	144.0	140.0	140.0	144.0	144.0	140.0	140.0
	e ₅	(A)				(A)			
	h ₃	(A)				(A)			
Flange connection APV-FG / 3.1-PN10 (DIN)	a ₁	216.0	216.0	222.0	222.0	242.0	242.0	248.0	248.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	155.0	155.0	151.0	151.0	155.0	155.0	151.0	151.0
	e ₅	(A)				(A)			
	h ₃	(A)				(A)			
Flange connection APV-FG / 3.1-PN25 (DIN)	a ₁	216.0	216.0	214.0	214.0	242.0	242.0	240.0	240.0
	f ₂	1.0	1.0	7.0	7.0	1.0	1.0	7.0	7.0
	h ₂	155.0	155.0	143.0	143.0	155.0	155.0	143.0	143.0
	e ₅	(A)				(A)			
	h ₃	(A)				(A)			

Tolerances according to DIN EN 735 Connection dimensions for centrifugal pumps.

* For pipes according to DIN 11866 series A

** For pipes according to DIN 11866 series B

*** For pipes according to DIN 11866 series C (pipe dimensions according to ASME BPE)

(A) On request

(E) On request. Not fully drainable in vertical position

(N/A) Not Available

Nominal width Connection type	2-stage						3-stage				
	DIN	50/40	50/50	65/50	65/65	80/65	50/40	50/50	65/50	65/65	65/80
	ISO	60.3/ 48.3	60.3/ 60.3	76.1/ 60.3	76.1/ 76.1	88.9/ 76.1	60.3/ 48.3	60.3/ 60.3	76.1/ 60.3	76.1/ 76.1	88.9/ 76.1
	OD	2" / 1 1/2"	2" / 2"	2 1/2" / 2"	2 1/2" / 2 1/2"	3" / 2 1/2"	2" / 1 1/2"	2" / 2"	2 1/2" / 2"	2 1/2" / 2 1/2"	3" / 2 1/2"
Threaded connection DIN 11851 (DIN)	a ₁	156.0	159.0	164.0	172.0	177.0	188.0	191.0	196.0	204.0	209.0
	f ₂	0.0	3.0	3.0	11.0	11.0	0.0	3.0	3.0	11.0	11.0
	h ₂	205.0	205.0	205.0	205.0	205.0	205.0	205.0	205.0	205.0	205.0
	e ₅	132.0	132.0	145.0	145.0	175.0	132.0	132.0	145.0	145.0	175.0
	h ₃	142.0	142.0	160.0	160.0	190.0	142.0	142.0	160.0	160.0	190.0
Threaded connection DIN 11864-1 Pipe range A (DIN)*	a ₁	152.0	155.0	160.0	168.0	174.0	184.0	187.0	192.0	200.0	206.0
	f ₂	0.0	3.0	3.0	11.0	11.0	0.0	3.0	3.0	11.0	11.0
	h ₂	203.0	201.0	201.0	201.0	201.0	203.0	201.0	201.0	201.0	201.0
	e ₅	133.0	133.0	146.0	146.0	175.0	133.0	133.0	146.0	146.0	175.0
	h ₃	141.0	141.0	156.0	156.0	187.0	141.0	141.0	156.0	156.0	187.0
Threaded connection SMS international (OD)	a ₁		144.0	148.0	156.0	156.0		176.0	180.0	188.0	188.0
	f ₂	(A)	3.0	3.0	11.0	11.0	(A)	3.0	3.0	11.0	11.0
	h ₂		190.0	190.0	189.0	189.0		190.0	190.0	189.0	189.0
	e ₅										
	h ₃			(A)					(A)		
Clamp DIN 32676 Pipe range A (DIN)*	a ₁	142.0	145.0	152.0	160.0	160.0	174.0	177.0	184.0	192.0	192.0
	f ₂	0.0	3.0	3.0	11.0	11.0	0.0	3.0	3.0	11.0	11.0
	h ₂	193.5	191.5	191.5	193.0	193.0	193.5	191.5	191.5	193.0	193.0
	e ₅	133.5	133.5	150.0	150.0	175.0	133.5	133.5	150.0	150.0	175.0
	h ₃	131.5	131.5	148.0	148.0	173.0	131.5	131.5	148.0	148.0	173.0
Clamp DIN 32676 Pipe range B (ISO)**	a ₁	149.0	160.0	160.0			181.0	192.0	192.0		
	f ₂	0.0	11.0	11.0			0.0	11.0	11.0		
	h ₂	193.5	201.0	201.0	(E)	(E)	193.5	201.0	201.0	(E)	(E)
	e ₅	146.0	146.0	180.0			146.0	146.0	180.0		
	h ₃	144.0	144.0	178.0			144.0	144.0	178.0		
Clamp DIN 32676 Pipe range C (OD)***	a ₁	142.0	145.0	152.0	160.0	160.0	174.0	177.0	184.0	192.0	192.0
	f ₂	0.0	3.0	3.0	11.0	11.0	0.0	3.0	3.0	11.0	11.0
	h ₂	208.0	191.5	191.5	201.0	201.0	208.0	191.5	191.5	201.0	201.0
	e ₅	144.2	144.2	169.7	169.7	199.5	144.2	144.2	169.7	169.7	199.5
	h ₃	142.2	142.2	167.7	167.7	197.5	142.2	142.2	167.7	167.7	197.5
Clamp SMS (OD)	a ₁	149.0	152.0	152.0	160.0	160.0	181.0	184.0	184.0	192.0	192.0
	f ₂	0.0	3.0	3.0	11.0	11.0	0.0	3.0	3.0	11.0	11.0
	h ₂	200.5	198.5	198.5	193.5	193.5	200.5	198.5	198.5	193.5	193.5
	e ₅			(A)					(A)		
	h ₃										
Grooved flange DIN 11864-2 Pipe range A (DIN)*	a ₁	144.5	147.5	147.5	155.5	157.5	176.5	179.5	179.5	187.5	189.5
	f ₂	0.0	3.0	3.0	11.0	11.0	0.0	3.0	3.0	11.0	11.0
	h ₂	195.5	193.5	193.5	188.5	188.5	195.5	193.5	193.5	188.5	188.5
	e ₅	132.5	132.5	142.5	142.5	169.5	132.5	132.5	142.5	142.5	169.5
	h ₃	133.7	133.7	143.7	143.7	170.7	133.7	133.7	143.7	143.7	170.7
Grooved flange DIN 11864-2 Pipe range B (ISO)**	a ₁	173.0	184.0	186.0			205.0	216.0	218.0		
	f ₂	0.0	11.0	11.0			0.0	11.0	11.0		
	h ₂	193.5	217.0	217.0	(E)	(E)	193.5	217.0	217.0	(E)	(E)
	e ₅	138.5	138.5	172.5			138.5	138.5	172.5		
	h ₃	139.7	139.7	173.7			139.7	139.7	173.7		
Flange EN1092-1 PN10 Kremo (ISO)	a ₁	133.5	136.5	146.5	154.5	153.5	165.5	168.5	178.5	186.5	185.5
	f ₂	0.0	3.0	3.0	11.0	11.0	0.0	3.0	3.0	11.0	11.0
	h ₂	185.0	183.0	183.0	188.0	188.0	185.0	183.0	183.0	188.0	188.0
	e ₅			(A)					(A)		
	h ₃										
Flange connection APV-FG / 3.1-PN10 (DIN)	a ₁	144.5	147.5	147.5	155.5	155.5	176.5	179.5	179.5	187.5	187.5
	f ₂	0.0	3.0	3.0	11.0	11.0	0.0	3.0	3.0	11.0	11.0
	h ₂	196.0	194.0	194.0	189.0	189.0	196.0	194.0	194.0	189.0	189.0
	e ₅			(A)					(A)		
	h ₃										
Flange connection APV-FG / 3.1-PN25 (DIN)	a ₁	140.5	143.5	143.5	151.5	155.5	172.5	175.5	175.5	183.5	187.5
	f ₂	0.0	3.0	3.0	11.0	11.0	0.0	3.0	3.0	11.0	11.0
	h ₂	192.0	191.0	191.0	185.0	185.0	192.0	191.0	191.0	185.0	185.0
	e ₅			(A)					(A)		
	h ₃										

Tolerances according to DIN EN 735 Connection dimensions for centrifugal pumps.

* For pipes according to DIN 11866 series A

** For pipes according to DIN 11866 series B

*** For pipes according to DIN 11866 series C (pipe dimensions according to ASME BPE)

(A) On request

(E) On request. Not fully drainable in vertical position

(N/A) Not Available

Nominal width Connection type	DIN ISO OD	4-stage					5-stage				
		50/40 60.3/ 48.3	50/50 60.3/ 60.3	65/50 76.1/ 60.3	65/65 76.1/ 76.1	80/65 88.9/ 76.1	50/40 60.3/ 48.3	50/50 60.3/ 60.3	65/50 76.1/ 60.3	65/65 76.1/ 76.1	65/80 88.9/ 76.1
		2" / 1 1/2"	2" / 2"	2 1/2" / 2"	2 1/2" / 2 1/2"	3" / 2 1/2"	2" / 1 1/2"	2" / 2"	2 1/2" / 2"	2 1/2" / 2 1/2"	3" / 2 1/2"
Threaded connection DIN 11851 (DIN)	a ₁	220.0	223.0	228.0	236.0	241.0	252.0	255.0	260.0	268.0	273.0
	f ₂	0.0	3.0	3.0	11.0	11.0	0.0	3.0	3.0	11.0	11.0
	h ₂	205.0	205.0	205.0	205.0	205.0	205.0	205.0	205.0	205.0	205.0
	e ₅	132.0	132.0	145.0	145.0	175.0	132.0	132.0	145.0	145.0	175.0
	h ₃	142.0	142.0	160.0	160.0	190.0	142.0	142.0	160.0	160.0	190.0
Threaded connection DIN 11864-1 Pipe range A (DIN)*	a ₁	216.0	219.0	224.0	232.0	238.0	248.0	251.0	256.0	264.0	270.0
	f ₂	0.0	3.0	3.0	11.0	11.0	0.0	3.0	3.0	11.0	11.0
	h ₂	203.0	201.0	201.0	201.0	201.0	203.0	201.0	201.0	201.0	201.0
	e ₅	133.0	133.0	146.0	146.0	175.0	133.0	133.0	146.0	146.0	175.0
	h ₃	141.0	141.0	156.0	156.0	187.0	141.0	141.0	156.0	156.0	187.0
Threaded connection SMS international (OD)	a ₁		208.0	212.0	220.0	220.0		240.0	244.0	252.0	252.0
	f ₂	(A)	3.0	3.0	11.0	11.0	(A)	3.0	3.0	11.0	11.0
	h ₂		190.0	190.0	189.0	189.0		190.0	190.0	189.0	189.0
	e ₅										
	h ₃			(A)					(A)		
Clamp DIN 32676 Pipe range A (DIN)*	a ₁	206.0	209.0	216.0	224.0	224.0	238.0	241.0	248.0	256.0	256.0
	f ₂	0.0	3.0	3.0	11.0	11.0	0.0	3.0	3.0	11.0	11.0
	h ₂	193.5	191.5	191.5	193.0	193.0	193.5	191.5	191.5	193.0	193.0
	e ₅	133.5	133.5	150.0	150.0	175.0	133.5	133.5	150.0	150.0	175.0
	h ₃	131.5	131.5	148.0	148.0	173.0	131.5	131.5	148.0	148.0	173.0
Clamp DIN 32676 Pipe range B (ISO)**	a ₁	213.0	224.0	224.0			245.0	256.0	256.0		
	f ₂	0.0	11.0	11.0			0.0	11.0	11.0		
	h ₂	193.5	201.0	201.0	(E)	(E)	193.5	201.0	201.0	(E)	(E)
	e ₅	146.0	146.0	180.0			146.0	146.0	180.0		
	h ₃	144.0	144.0	178.0			144.0	144.0	178.0		
Clamp DIN 32676 Pipe range C (OD)***	a ₁	206.0	209.0	216.0	224.0	224.0	238.0	241.0	248.0	256.0	256.0
	f ₂	0.0	3.0	3.0	11.0	11.0	0.0	3.0	3.0	11.0	11.0
	h ₂	208.0	191.5	191.5	201.0	201.0	208.0	191.5	191.5	201.0	201.0
	e ₅	144.2	144.2	169.7	169.7	199.5	144.2	144.2	169.7	169.7	199.5
	h ₃	142.2	142.2	167.7	167.7	197.5	142.2	142.2	167.7	167.7	197.5
Clamp SMS (OD)	a ₁	213.0	216.0	216.0	224.0	224.0	245.0	248.0	248.0	256.0	256.0
	f ₂	0.0	3.0	3.0	11.0	11.0	0.0	3.0	3.0	11.0	11.0
	h ₂	200.5	198.5	198.5	193.5	193.5	200.5	198.5	198.5	193.5	193.5
	e ₅										
	h ₃			(A)					(A)		
Grooved flange DIN 11864-2 Pipe range A (DIN)*	a ₁	208.5	211.5	211.5	219.5	221.5	240.5	243.5	243.5	251.5	253.5
	f ₂	0.0	3.0	3.0	11.0	11.0	0.0	3.0	3.0	11.0	11.0
	h ₂	195.5	193.5	193.5	188.5	188.5	195.5	193.5	193.5	188.5	188.5
	e ₅	132.5	132.5	142.5	142.5	169.5	132.5	132.5	142.5	142.5	169.5
	h ₃	133.7	133.7	143.7	143.7	170.7	133.7	133.7	143.7	143.7	170.7
Grooved flange DIN 11864-2 Pipe range B (ISO)**	a ₁	237.0	248.0	250.0			269.0	280.0	282.0		
	f ₂	0.0	11.0	11.0			0.0	11.0	11.0		
	h ₂	193.5	217.0	217.0	(E)	(E)	193.5	217.0	217.0	(E)	(E)
	e ₅	138.5	138.5	172.5			138.5	138.5	172.5		
	h ₃	139.7	139.7	173.7			139.7	139.7	173.7		
Flange EN1092-1 PN10 Kremo (ISO)	a ₁	197.5	200.5	210.5	218.5	217.5	229.5	232.5	242.5	250.5	249.5
	f ₂	0.0	3.0	3.0	11.0	11.0	0.0	3.0	3.0	11.0	11.0
	h ₂	185.0	183.0	183.0	188.0	188.0	185.0	183.0	183.0	188.0	188.0
	e ₅										
	h ₃			(A)					(A)		
Flange connection APV-FG / 3.1-PN10 (DIN)	a ₁	208.5	211.5	211.5	219.5	219.5	240.5	243.5	243.5	251.5	251.5
	f ₂	0.0	3.0	3.0	11.0	11.0	0.0	3.0	3.0	11.0	11.0
	h ₂	196.0	194.0	194.0	189.0	189.0	196.0	194.0	194.0	189.0	189.0
	e ₅										
	h ₃			(A)					(A)		
Flange connection APV-FG / 3.1-PN25 (DIN)	a ₁	204.5	207.5	207.5	215.5	219.5	236.5	239.5	239.5	247.5	251.5
	f ₂	0.0	3.0	3.0	11.0	11.0	0.0	3.0	3.0	11.0	11.0
	h ₂	192.0	191.0	191.0	185.0	185.0	192.0	191.0	191.0	185.0	185.0
	e ₅										
	h ₃			(A)					(A)		

Tolerances according to DIN EN 735 Connection dimensions for centrifugal pumps.

* For pipes according to DIN 11866 series A

** For pipes according to DIN 11866 series B

*** For pipes according to DIN 11866 series C (pipe dimensions according to ASME BPE)

(A) On request

(E) On request. Not fully drainable in vertical position

(N/A) Not Available

Nominal width Connection type	2-stage			3-stage		4-stage	
	DIN	80/80	100/80	80/80	100/80	80/80	100/80
	ISO	88.9/88.9	114.3/88.9	88.9/88.9	114.3/88.9	88.9/88.9	114.3/88.9
	OD	3"/3"	4"/3"	3"/3"	4"/3"	3"/3"	4"/3"
Threaded connection DIN 11864-1 Pipe range A (DIN)*	a ₁	196.0	196.0	246.0	246.0	296.0	296.0
	f ₂	12.4	12.4	12.4	12.4	12.4	12.4
	h ₂	298.0	298.0	298.0	298.0	298.0	298.0
	e ₅	175.0	191.0	175.0	191.0	175.0	191.0
	h ₃	187.0	205.0	187.0	205.0	187.0	205.0
Threaded connection DIN 11864-1 Pipe range B (ISO)**	a ₁	198.0	202.0	248.0	252.0	298.0	302.0
	f ₂	14.3	14.3	14.3	14.3	14.3	14.3
	h ₂	298.0	298.0	298.0	298.0	298.0	298.0
	e ₅	205.5	(A)	205.5	(A)	205.5	(A)
	h ₃	219.5	(A)	219.5	(A)	219.5	(A)
Threaded connection DIN 11864-1 Pipe range C (OD)***	a ₁	191.5	191.5	241.5	241.5	291.5	291.5
	f ₂	8.0	8.0	8.0	8.0	8.0	8.0
	h ₂	298.0	298.0	298.0	298.0	298.0	298.0
	e ₅	189.0	239.0	189.0	239.0	189.0	239.0
	h ₃	201.0	253.0	201.0	253.0	201.0	253.0
Grooved flange DIN 11864-2 Pipe range A (DIN)* FN	a ₁	189.5	189.5	239.5	239.5	289.5	289.5
	f ₂	12.4	12.4	12.4	12.4	12.4	12.4
	h ₂	291.5	291.5	291.5	291.5	291.5	291.5
	e ₅	171.0	181.0	171.0	181.0	171.0	181.0
	h ₃	171.0	181.0	171.0	181.0	171.0	181.0
Grooved flange DIN 11864-2 Pipe range B (ISO)** FN	a ₁	191.5	191.5	241.5	241.5	291.5	291.5
	f ₂	14.3	14.3	14.3	14.3	14.3	14.3
	h ₂	291.5	291.5	291.5	291.5	291.5	291.5
	e ₅	196.0	234.0	196.0	234.0	196.0	234.0
	h ₃	195.0	233.0	195.0	233.0	195.0	233.0
Grooved flange DIN 11864-2 Pipe range C (OD)*** FN	a ₁	183.0	185.0	233.0	235.0	283.0	285.0
	f ₂	8.0	8.0	8.0	8.0	8.0	8.0
	h ₂	289.5	289.5	289.5	289.5	289.5	289.5
	e ₅	171.0	181.0	171.0	181.0	171.0	181.0
	h ₃	171.0	181.0	171.0	181.0	171.0	181.0

Tolerances according to DIN EN 735 Connection dimensions for centrifugal pumps.

* For pipes according to DIN 11866 series A

** For pipes according to DIN 11866 series B

*** For pipes according to DIN 11866 series C (pipe dimensions according to ASME BPE)

(A) On request

(E) On request. Not fully drainable in vertical position

(N/A) Not Available

GEA Hilge CONTRA I

GEA Hilge CONTRA I Bloc

GEA Hilge CONTRA I Bloc-SUPER

GEA Hilge CONTRA I Bloc-V

GEA Hilge CONTRA I Adapta

GEA Hilge CONTRA I Adapta-SUPER

GEA Hilge CONTRA I Adapta-V




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 25–40, pressure side DN 25–40
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 15 m³/h
Flow rate 60 Hz	Max. 15 m³/h
Pump head 50 Hz	Max. 98 m
Pump head 60 Hz	Max. 98 m
Housing pressure	25 bar

Certificates



* registered for recertification

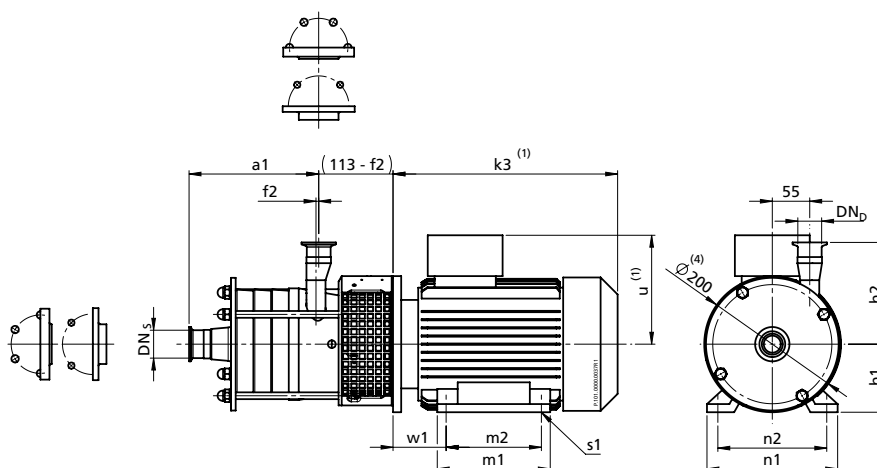

2-pole

P2 [kW]	IEC- size	h1 [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	w1 [mm]	m1 [mm]	m2 [mm]	n1 [mm]	n2 [mm]	s1 [mm]	Weight [kg]
0.75	80	80	240	140	50	125	100	160	125	9×13	21
1.1	80	80	240	140	50	125	100	160	125	9×13	24
1.5	90S	90	275	150	56	150	100	170	140	10×14	27
2.2	90L	90	275	150	56	150	125	170	140	10×14	33
3.0	100L	100	330	160	78	170	140	200	160	12×16	37
4.0	112M	112	360	175	90	175	140	220	190	12×16	42
5.5	112M	112	360	175	90	175	140	220	190	12×16	47

Dimensions depend on the casing size (DN_s, DN_p, a1, h2, e1). See table of connections.

⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.


⁽⁴⁾ Largest diameter for pump without motor.

Weight: net-weight without packaging



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 25–40, pressure side DN 25–40
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 15 m³/h
Flow rate 60 Hz	Max. 15 m³/h
Pump head 50 Hz	Max. 98 m
Pump head 60 Hz	Max. 98 m
Housing pressure	25 bar
Certificates	

* registered for recertification

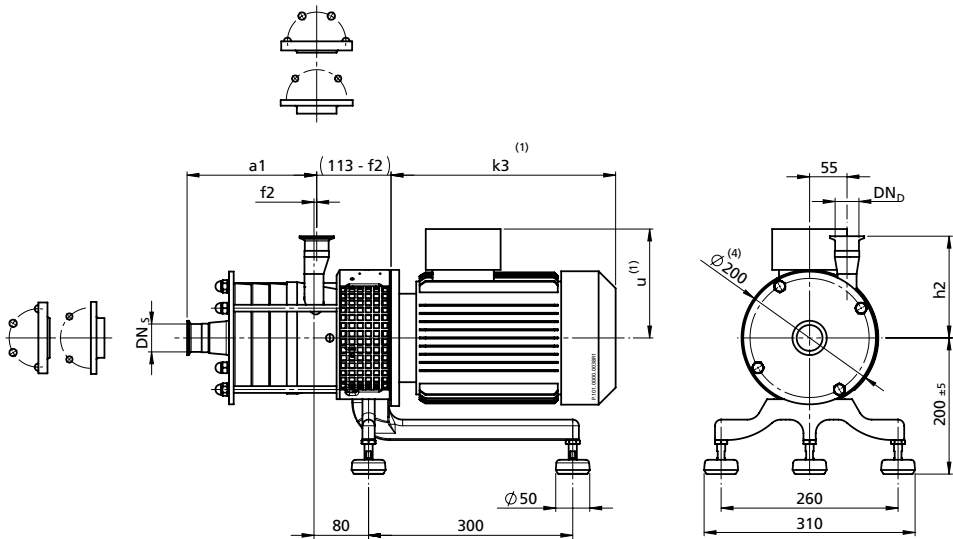

2-pole

P2 [kW]	IEC- size	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	Weight [kg]
0.75	80	240	140	25
1.1	80	240	140	28
1.5	90S	275	150	31
2.2	90L	275	150	36
3.0	100L	330	160	43
4.0	112M	360	175	48
5.5	112M	360	175	53

Dimensions depend on the casing size (DN_s, DN_D, a1, h2, e1). See table of connections.
⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.
⁽⁴⁾ Largest diameter for pump without motor.
 Weight: net-weight without packaging




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 25–40, pressure side DN 25–40
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 15 m ³ /h
Flow rate 60 Hz	Max. 15 m ³ /h
Pump head 50 Hz	Max. 98 m
Pump head 60 Hz	Max. 98 m
Housing pressure	25 bar

Certificates



* registered for recertification

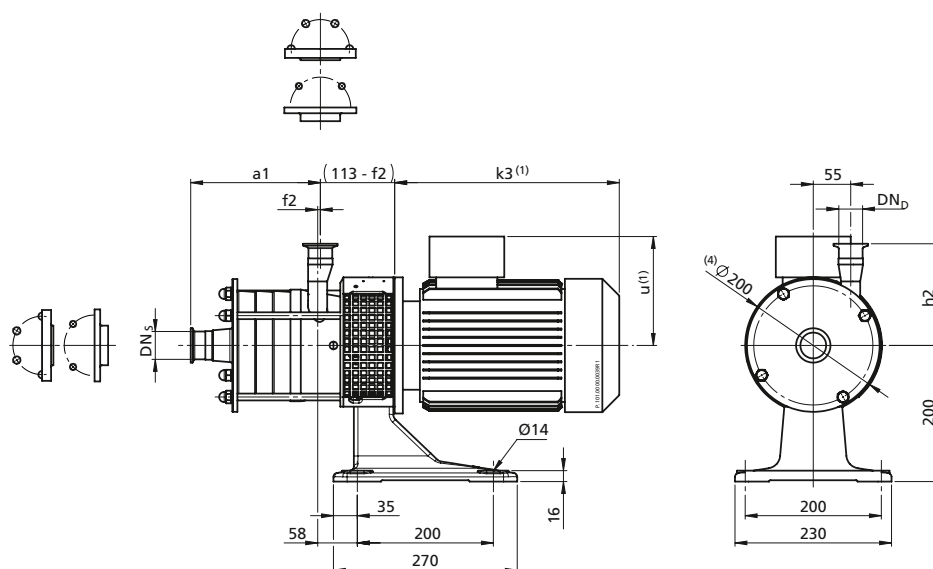

2-pole

P2 [kW]	IEC- size	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	Weight [kg]
0.75	80	240	140	26
1.1	80	240	140	29
1.5	90S	275	150	33
2.2	90L	275	150	38
3.0	100L	330	160	42
4.0	112M	360	175	47
5.5	112M	360	175	52

Dimensions depend on the casing size (DN_s, DN_D, a1, h2, e1). See table of connections.

⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.


⁽⁴⁾ Largest diameter for pump without motor.

Weight: net-weight without packaging



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 25–40, pressure side DN 25–40
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 15 m³/h
Flow rate 60 Hz	Max. 15 m³/h
Pump head 50 Hz	Max. 98 m
Pump head 60 Hz	Max. 98 m
Housing pressure	25 bar
Certificates	 

* registered for recertification

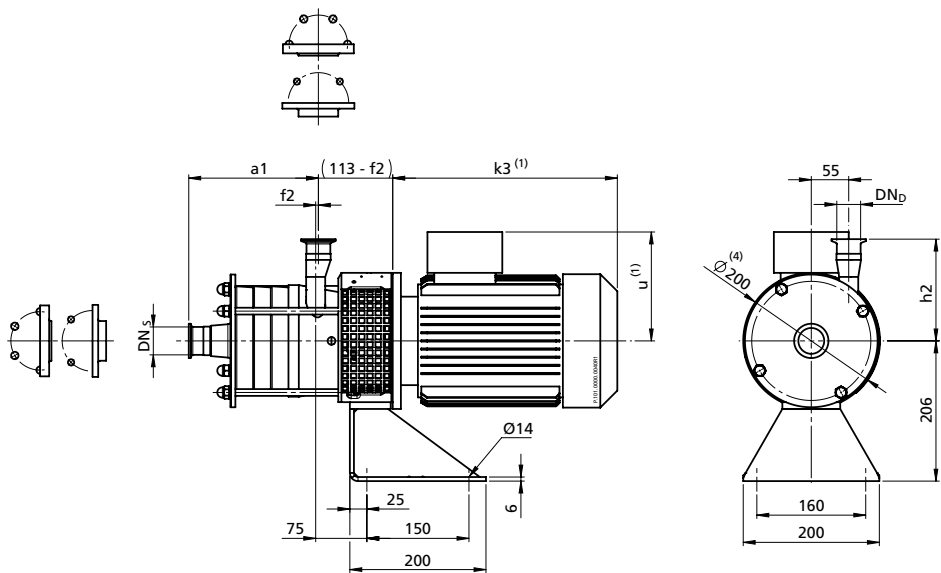

2-pole

P2 [kW]	IEC- size	k _s ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	Weight [kg]
0.75	80	240	140	24
1.1	80	240	140	27
1.5	90S	275	150	31
2.2	90L	275	150	36
3.0	100L	330	160	41
4.0	112M	360	175	46
5.5	112M	360	175	51

Dimensions depend on the casing size (DN_s, DN_D, a1, h2, e1). See table of connections.
⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.
⁽⁴⁾ Largest diameter for pump without motor.
Weight: net-weight without packaging




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 25–40, pressure side DN 25–40
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 15 m³/h
Flow rate 60 Hz	Max. 15 m³/h
Pump head 50 Hz	Max. 98 m
Pump head 60 Hz	Max. 98 m
Housing pressure	25 bar

Certificates



* registered for recertification

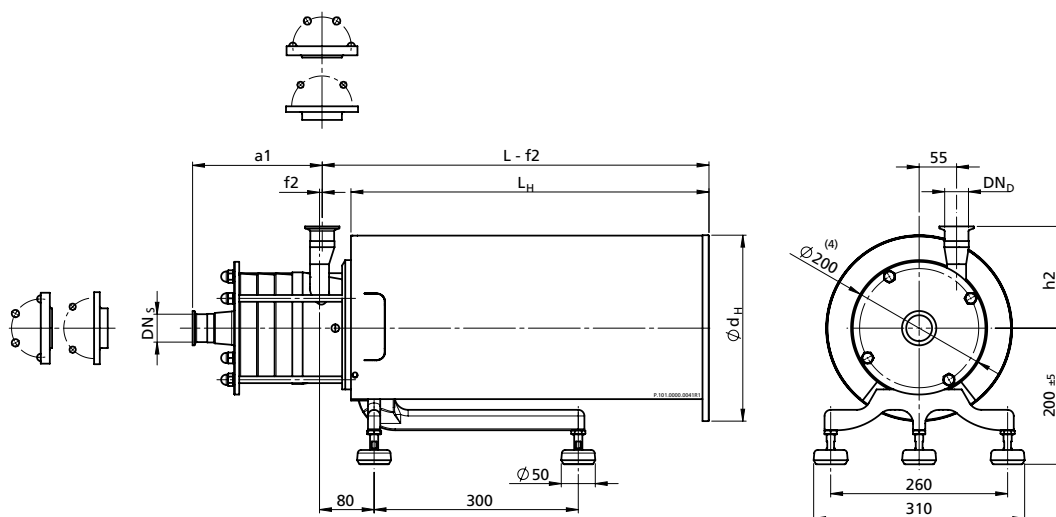

2-pole

P2 [kW]	IEC- size	L [mm]	L _H [mm]	ød _H [mm]	Weight [kg]
0.75	80	496	450	220	28
1.1	80	496	450	220	31
1.5	90S	496	450	220	34
2.2	90L	496	450	220	40
3.0	100L	566	550	270	49
4.0	112M	566	550	270	54
5.5	112M	566	550	270	59

Dimensions depend on the casing size (DN_s, DN_d, a1, h2, e1). See table of connections.


⁽⁴⁾ Largest diameter for pump without motor.

Weight: net-weight without packaging



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 25–40, pressure side DN 25–40
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 15 m³/h
Flow rate 60 Hz	Max. 15 m³/h
Pump head 50 Hz	Max. 98 m
Pump head 60 Hz	Max. 98 m
Housing pressure	25 bar
Certificates	 

* registered for recertification

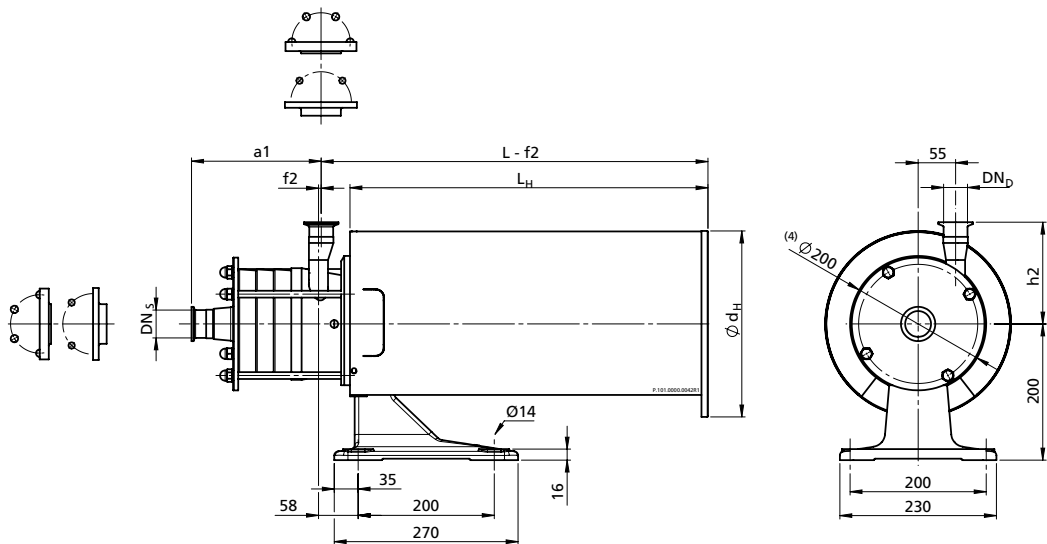

2-pole

P2 [kW]	IEC- size	L [mm]	L _H [mm]	ød _H [mm]	Weight [kg]
0.75	80	496	450	220	29
1.1	80	496	450	220	32
1.5	90S	496	450	220	36
2.2	90L	496	450	220	41
3.0	100L	566	550	270	48
4.0	112M	566	550	270	54
5.5	112M	566	550	270	59

Dimensions depend on the casing size (DN_S, DN_D, a1, h2, e1). See table of connections.
(4) Largest diameter for pump without motor.
Weight: net-weight without packaging




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 25–40, pressure side DN 25–40
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 15 m³/h
Flow rate 60 Hz	Max. 15 m³/h
Pump head 50 Hz	Max. 98 m
Pump head 60 Hz	Max. 98 m
Housing pressure	25 bar

Certificates



* registered for recertification

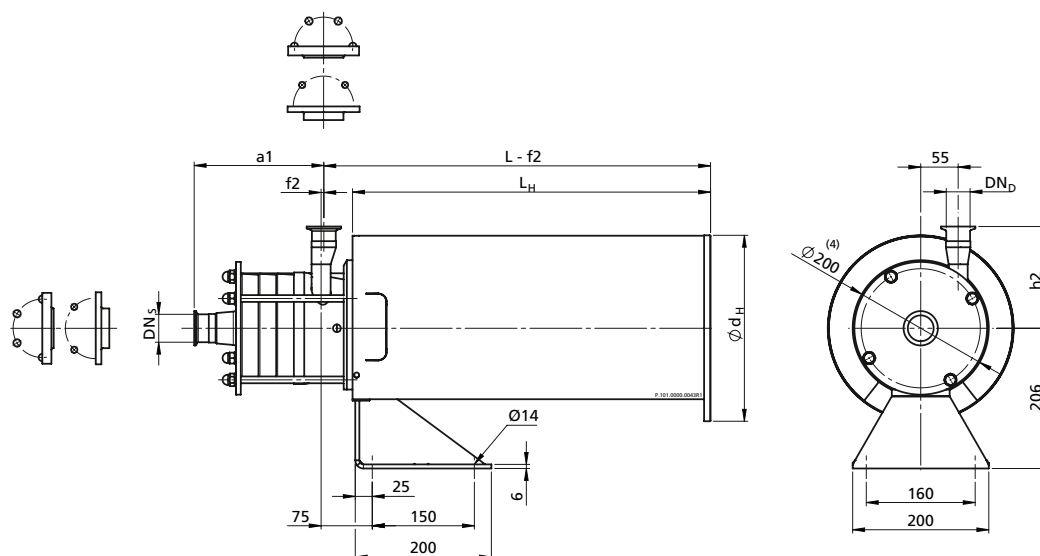

2-pole

P2 [kW]	IEC- size	L [mm]	L _H [mm]	ød _H [mm]	Weight [kg]
0.75	80	496	450	220	28
1.1	80	496	450	220	31
1.5	90S	496	450	220	34
2.2	90L	496	450	220	40
3.0	100L	566	550	270	47
4.0	112M	566	550	270	52
5.5	112M	566	550	270	57

Dimensions depend on the casing size (DN_s, DN_D, a1, h2, e1). See table of connections.

⁽⁴⁾ Largest diameter for pump without motor.

Weight: net-weight without packaging




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 25–40, pressure side DN 25–40
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 15 m³/h
Flow rate 60 Hz	Max. 15 m³/h
Pump head 50 Hz	Max. 98 m
Pump head 60 Hz	Max. 98 m
Housing pressure	25 bar


Certificates



* registered for recertification

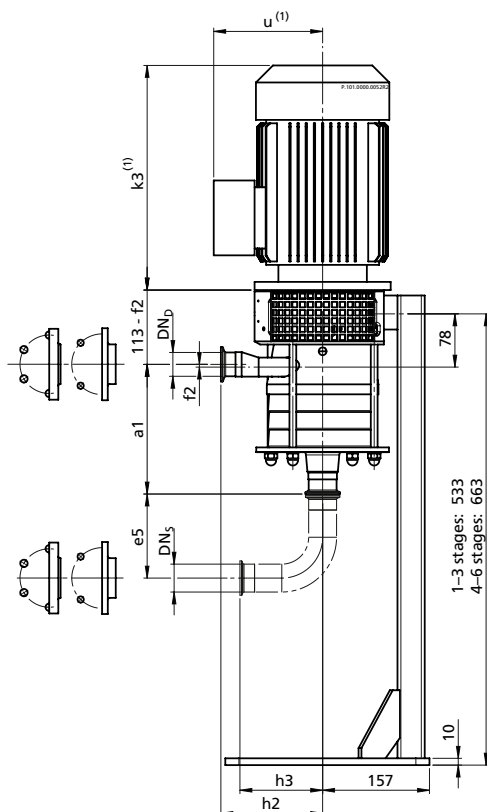

Top view
(w/o terminal box)



2-pole

P2 [kW]	IEC- size	$k_3^{(1)}$ [mm]	$u^{(1)}$ [mm]	Weight [kg]
0.75	80	240	140	36
1.1	80	240	140	37
1.5	90S	275	150	46
2.2	90L	275	150	48
3.0	100L	330	160	59
4.0	112M	360	175	70
5.5	112M	360	175	94

Dimensions depend on the casing size (DN_s, DN_b, a1, h2, h3, e1, e5). See table of connections.

⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.

Weight: net-weight without packaging




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 25–40, pressure side DN 25–40
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 15 m³/h
Flow rate 60 Hz	Max. 15 m³/h
Pump head 50 Hz	Max. 98 m
Pump head 60 Hz	Max. 98 m
Housing pressure	25 bar

Certificates



* registered for recertification

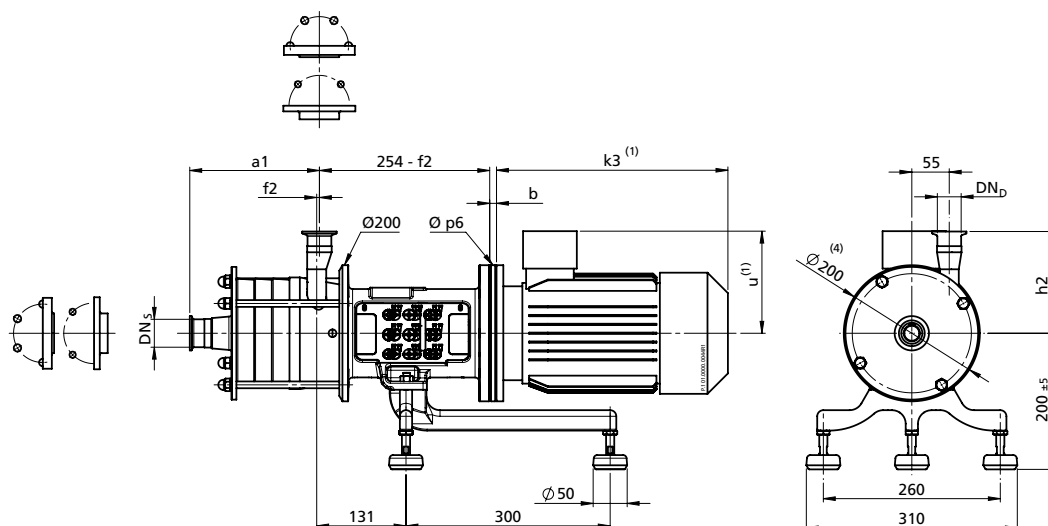

2-pole

				Standard		tronic		Weight [kg]
P2 [kW]	IEC- size	b [mm]	p ₆ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	
0.75	80	0	200	320	130	–	–	40
1.1	80	0	200	320	130	–	–	41
1.5	90S	10	200	340	150	274	158	51
2.2	90L	10	200	340	150	274	158	52

Dimensions depend on the casing size (DN_s, DN_D, a1, h2, e1). See table of connections.

⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.

⁽⁴⁾ Largest diameter for pump without motor.

Weight: net-weight without packaging




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 25–40, pressure side DN 25–40
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3×380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 15 m³/h
Flow rate 60 Hz	Max. 15 m³/h
Pump head 50 Hz	Max. 98 m
Pump head 60 Hz	Max. 98 m
Housing pressure	25 bar

Certificates



* registered for recertification

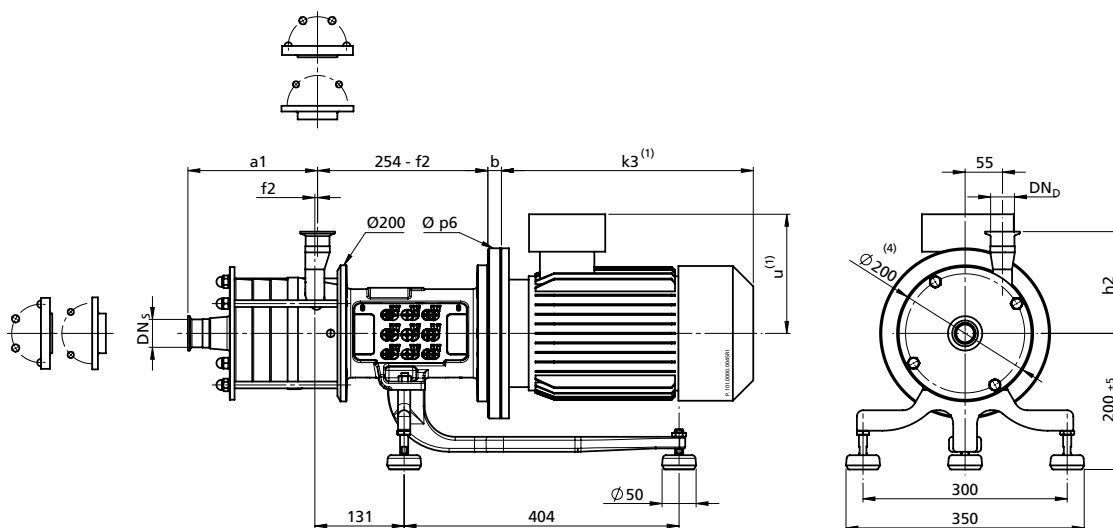

2-pole

P2 [kW]	IEC- size	b [mm]	p ₆ [mm]	Standard		tronic		Weight [kg]
				k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	
3.0	100L	20	250	370	175	334	201	65
4.0	112M	20	250	380	185	334	201	75
5.5	132S	40	300	450	205	365	201	99

Dimensions depend on the casing size (DN_s, DN_p, a1, h2, e1). See table of connections.

⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.

⁽⁴⁾ Largest diameter for pump without motor.

Weight: net-weight without packaging




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 25–40, pressure side DN 25–40
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3×380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 15 m³/h
Flow rate 60 Hz	Max. 15 m³/h
Pump head 50 Hz	Max. 98 m
Pump head 60 Hz	Max. 98 m
Housing pressure	25 bar

Certificates



* registered for recertification

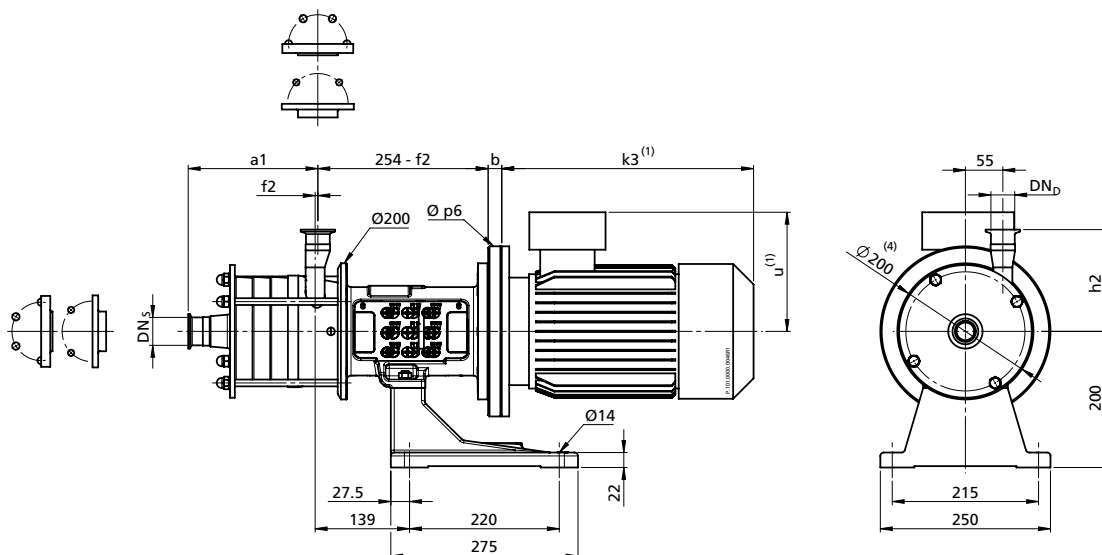

2-pole

				Standard		tronic		
P2 [kW]	IEC- size	b [mm]	p ₆ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	Weight [kg]
0.75	80	0	200	320	130	–	–	45
1.1	80	0	200	320	130	–	–	46
1.5	90S	10	200	340	150	274	158	55
2.2	90L	10	200	340	150	274	158	56
3.0	100L	20	250	370	175	334	201	68
4.0	112M	20	250	380	185	334	201	78
5.5	132S	40	300	450	205	365	201	102

Dimensions depend on the casing size (DN_s, DN_p, a1, h2, e1). See table of connections.

⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.

⁽⁴⁾ Largest diameter for pump without motor.

Weight: net-weight without packaging for standard motor




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 25–40, pressure side DN 25–40
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 15 m³/h
Flow rate 60 Hz	Max. 15 m³/h
Pump head 50 Hz	Max. 98 m
Pump head 60 Hz	Max. 98 m
Housing pressure	25 bar

Certificates



* registered for recertification

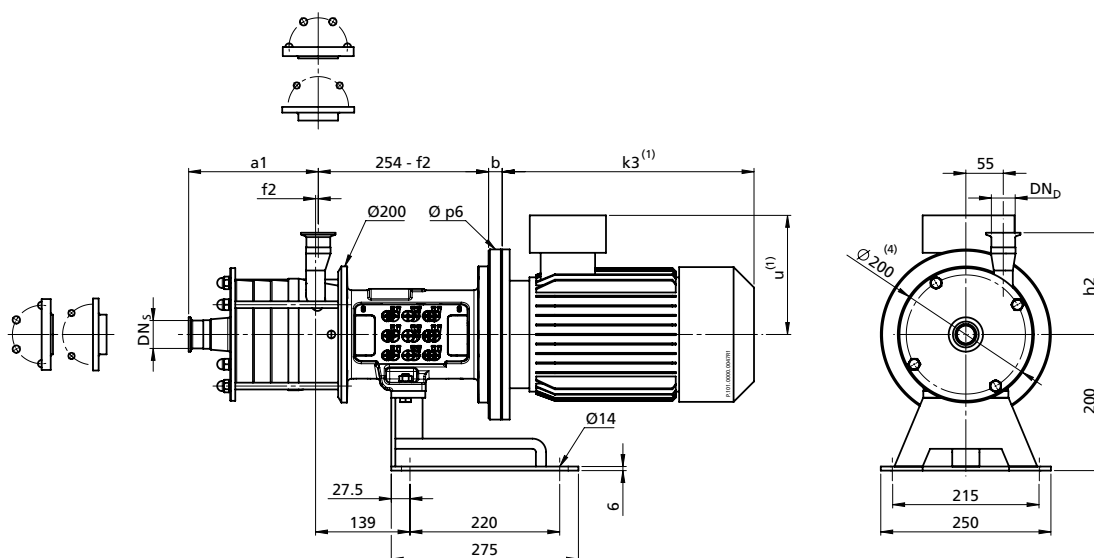

2-pole

P2 [kW]	IEC- size	b [mm]	p ₆ [mm]	Standard		tronic		Weight [kg]
				k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	
0.75	80	0	200	320	130	–	–	41
1.1	80	0	200	320	130	–	–	42
1.5	90S	10	200	340	150	274	158	51
2.2	90L	10	200	340	150	274	158	53
3.0	100L	20	250	370	175	334	201	64
4.0	112M	20	250	380	185	334	201	74
5.5	132S	40	300	450	205	365	201	98

Dimensions depend on the casing size (DN_s, DN_D, a1, h2, e1). See table of connections.

⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.

⁽⁴⁾ Largest diameter for pump without motor.

Weight: net-weight without packaging




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 25–40, pressure side DN 25–40
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 15 m³/h
Flow rate 60 Hz	Max. 15 m³/h
Pump head 50 Hz	Max. 98 m
Pump head 60 Hz	Max. 98 m
Housing pressure	25 bar

Certificates



* registered for recertification

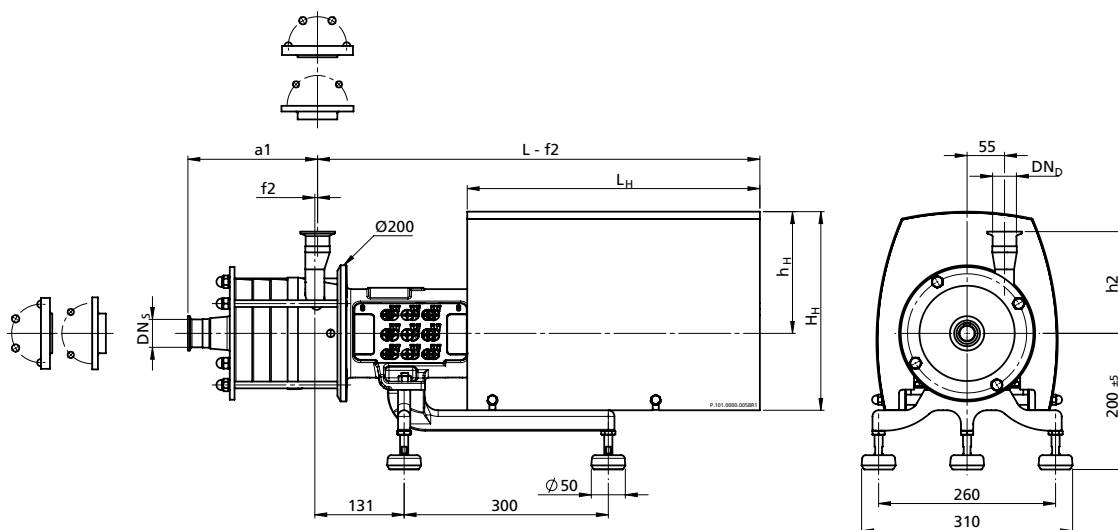


2-pole

P2 [kW]	IEC- size	L [mm]	L _H [mm]	H _H [mm]	h _H [mm]	Weight [kg]
0.75	80	644.0	431	291.5	176.5	45
1.1	80	644.0	431	291.5	176.5	46
1.5	90S	654.5	431	291.5	178.5	56
2.2	90L	654.5	431	291.5	178.5	57


Dimensions depend on the casing size (DN_s, DN_D, a1, h2, e1). See table of connections.

Weight: net-weight without packaging



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 25–40, pressure side DN 25–40
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3×380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 15 m³/h
Flow rate 60 Hz	Max. 15 m³/h
Pump head 50 Hz	Max. 98 m
Pump head 60 Hz	Max. 98 m
Housing pressure	25 bar
Certificates	 


* registered for recertification

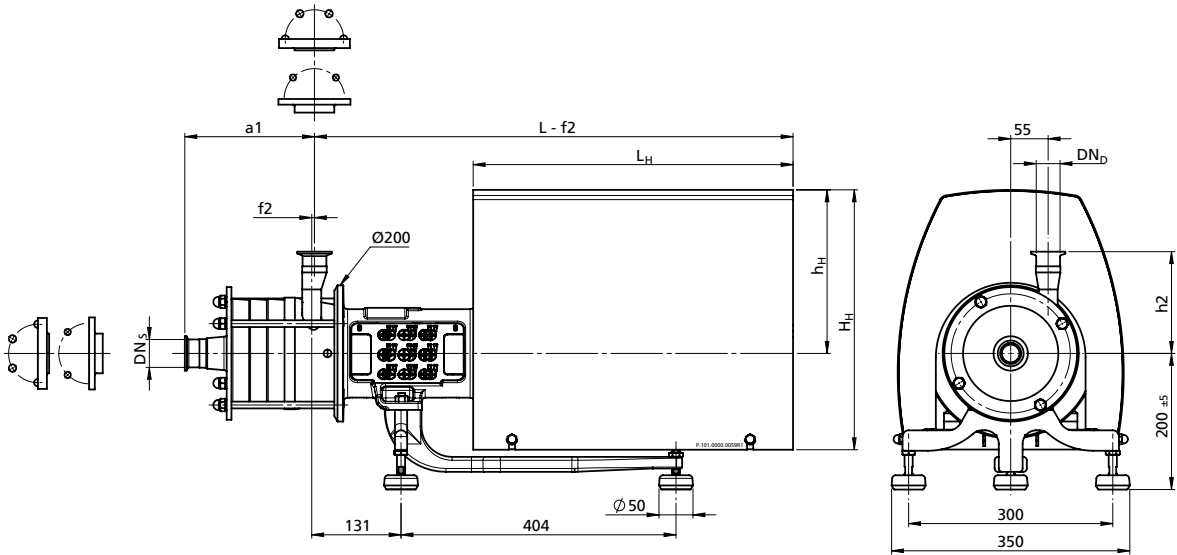

2-pole

P2 [kW]	IEC- size	L [mm]	L _H [mm]	H _H [mm]	h _H [mm]	Weight [kg]
3	100L	708	471	381.5	240	73
4	112M	708	471	381.5	240	83
5,5	132S	795	561	381.5	220	108

Dimensions depend on the casing size (DN_s, DN_D, a1, h2, e1). See table of connections.
Weight: net-weight without packaging




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 25–40, pressure side DN 25–40
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 15 m³/h
Flow rate 60 Hz	Max. 15 m³/h
Pump head 50 Hz	Max. 98 m
Pump head 60 Hz	Max. 98 m
Housing pressure	25 bar

Certificates



* registered for recertification

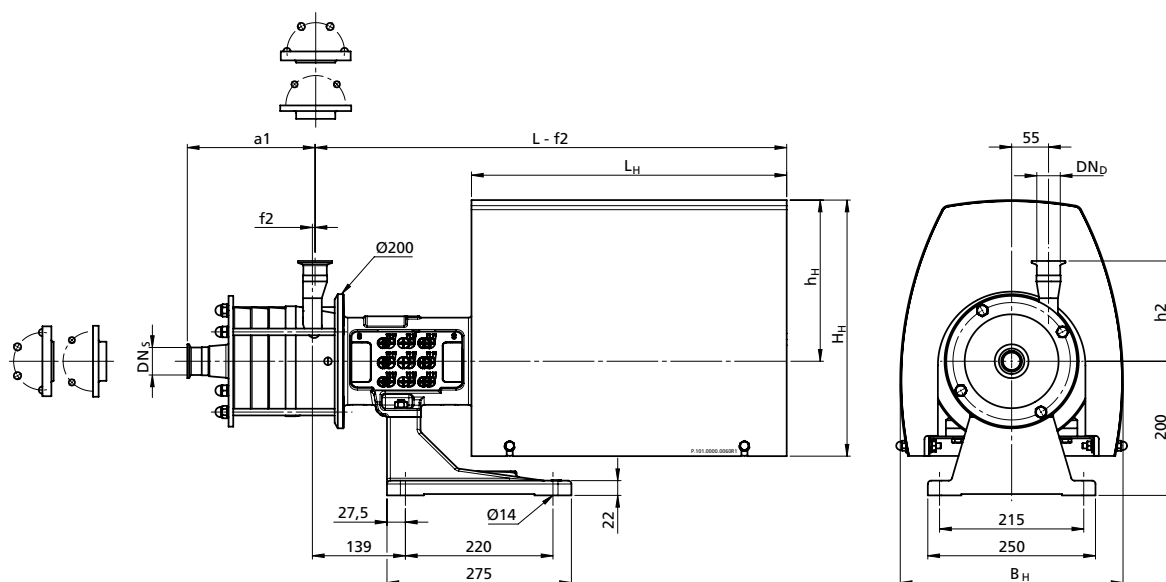

2-pole

P2 [kW]	IEC- size	L [mm]	L _H [mm]	B _H [mm]	H _H [mm]	h _H [mm]	Weight [kg]
0.75	80	644.0	431	266	291.5	176.5	50
1.1	80	644.0	431	266	291.5	176.5	51
1.5	90S	654.5	431	266	291.5	178.5	60
2.2	90L	654.5	431	266	291.5	178.5	62
3.0	100L	708.0	471	332	381.5	240.0	75
4.0	112M	708.0	471	332	381.5	240.0	85
5.5	132S	795.0	561	332	381.5	220.0	110

Dimensions depend on the casing size (DN_s, DN_p, a1, h2, e1). See table of connections.

Weight: net-weight without packaging




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 25–40, pressure side DN 25–40
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 15 m³/h
Flow rate 60 Hz	Max. 15 m³/h
Pump head 50 Hz	Max. 98 m
Pump head 60 Hz	Max. 98 m
Housing pressure	25 bar

Certificates



* registered for recertification

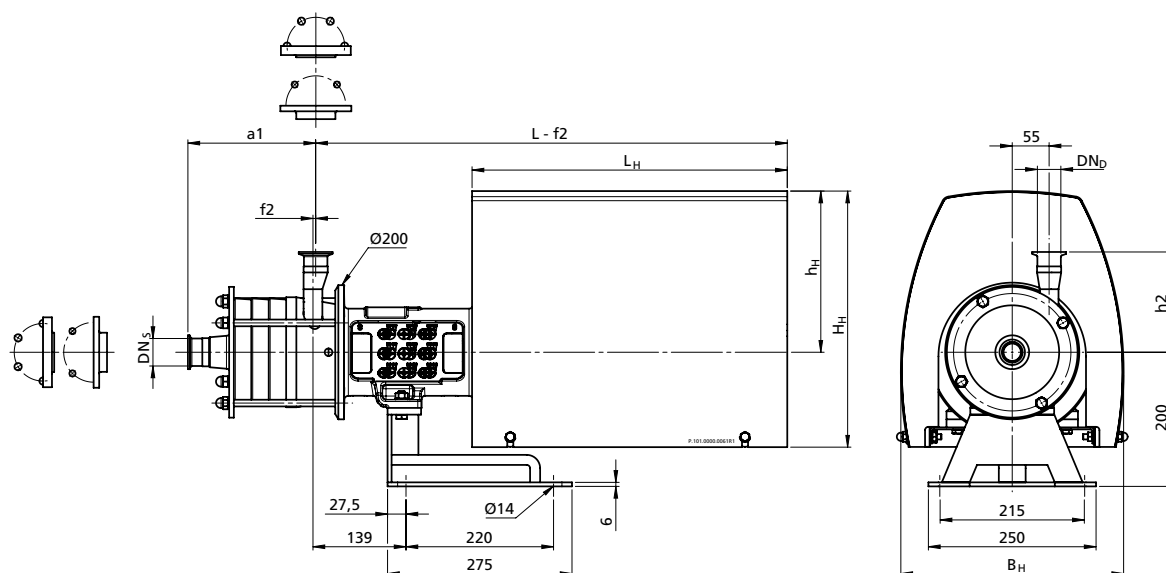

2-pole

P2 [kW]	IEC- size	L [mm]	L _H [mm]	B _H [mm]	H _H [mm]	h _H [mm]	Weight [kg]
0.75	80	644.0	431	266	291.5	176.5	46
1.1	80	644.0	431	266	291.5	176.5	47
1.5	90S	654.5	431	266	291.5	178.5	57
2.2	90L	654.5	431	266	291.5	178.5	58
3.0	100L	708.0	471	332	381.5	240.0	71
4.0	112M	708.0	471	332	381.5	240.0	82
5.5	132S	795.0	561	332	381.5	220.0	107

Dimensions depend on the casing size (DN_s, DN_D, a1, h2, e1). See table of connections.

⁽⁴⁾ Largest diameter for pump without motor.

Weight: net-weight without packaging




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 25–40, pressure side DN 25–40
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 15 m³/h
Flow rate 60 Hz	Max. 15 m³/h
Pump head 50 Hz	Max. 98 m
Pump head 60 Hz	Max. 98 m
Housing pressure	25 bar

Certificates



* registered for recertification

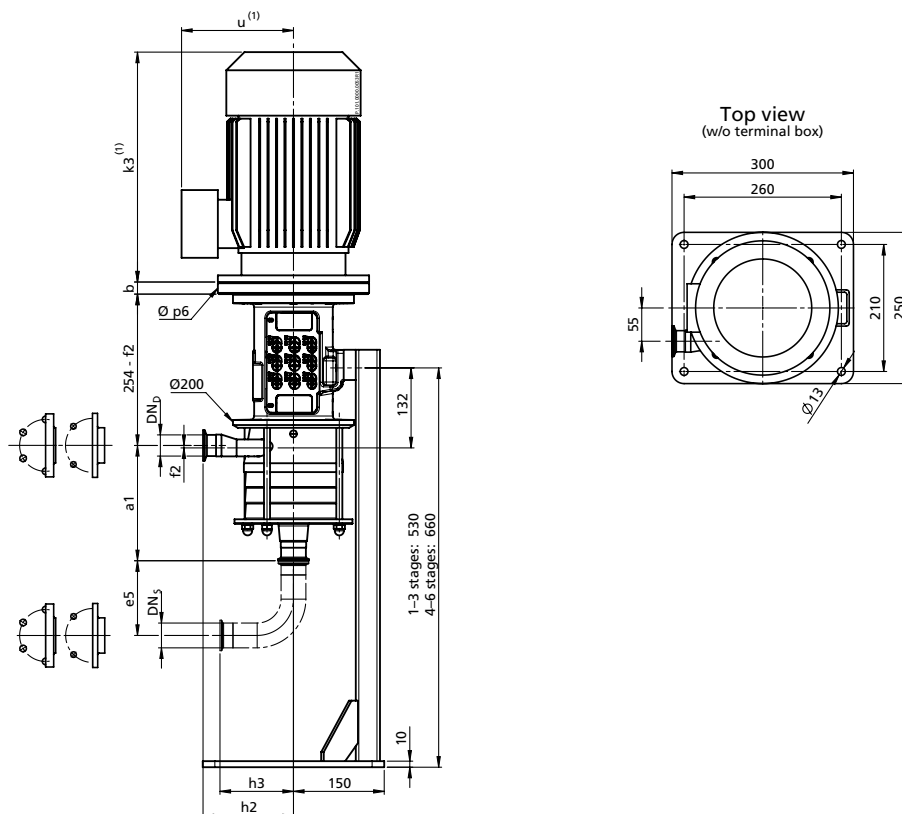


2-pole


				Standard		tronic		
P2 [kW]	IEC- size	b [mm]	p ₆ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	Weight [kg]
0.75	80	0	200	280	145	–	–	47
1.1	80	0	200	280	145	–	–	48
1.5	90S	10	200	320	150	274	158	58
2.2	90L	10	200	320	150	274	158	60
3.0	100L	20	250	340	175	334	201	71
4.0	112M	20	250	370	185	334	201	70
5.5	132S	40	300	450	205	365	201	105

Dimensions depend on the casing size (DN_s, DN_b, a1, h2, e1). See table of connections.


⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.
Weight: net-weight without packaging

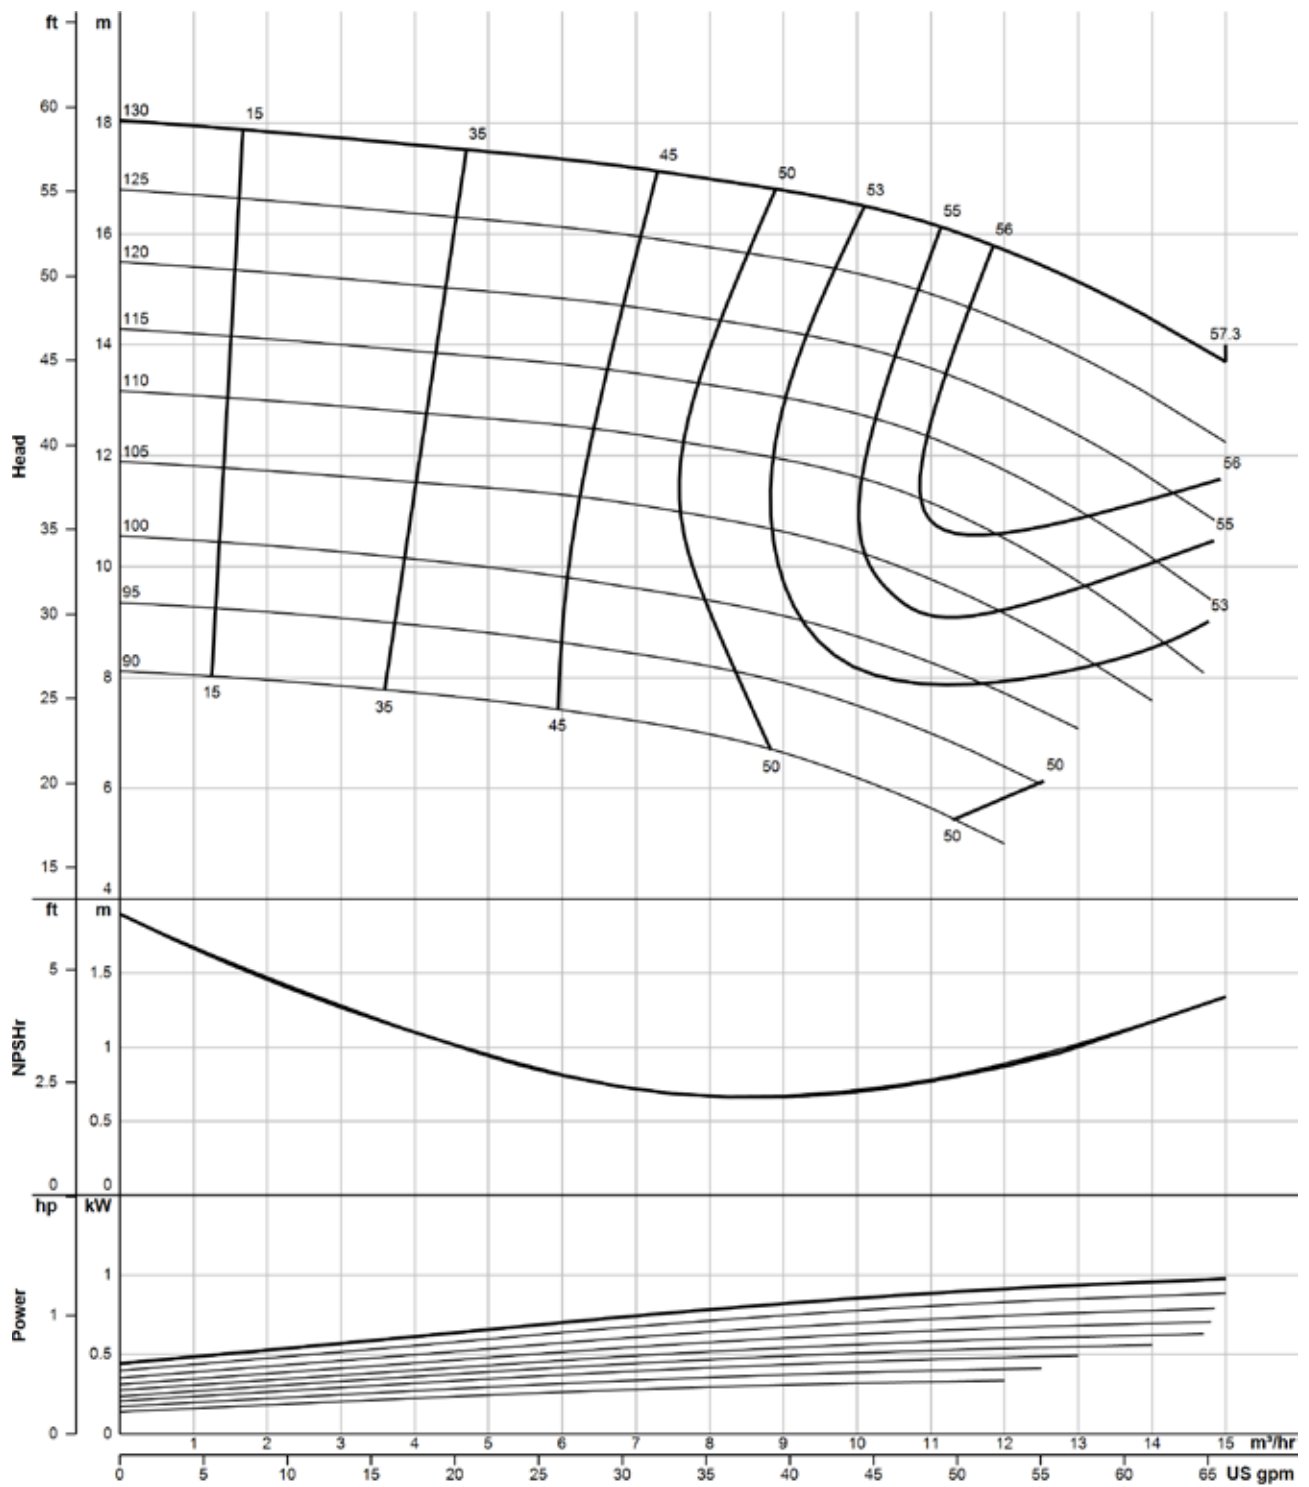


The flow charts are based on water, temperature 20 °C

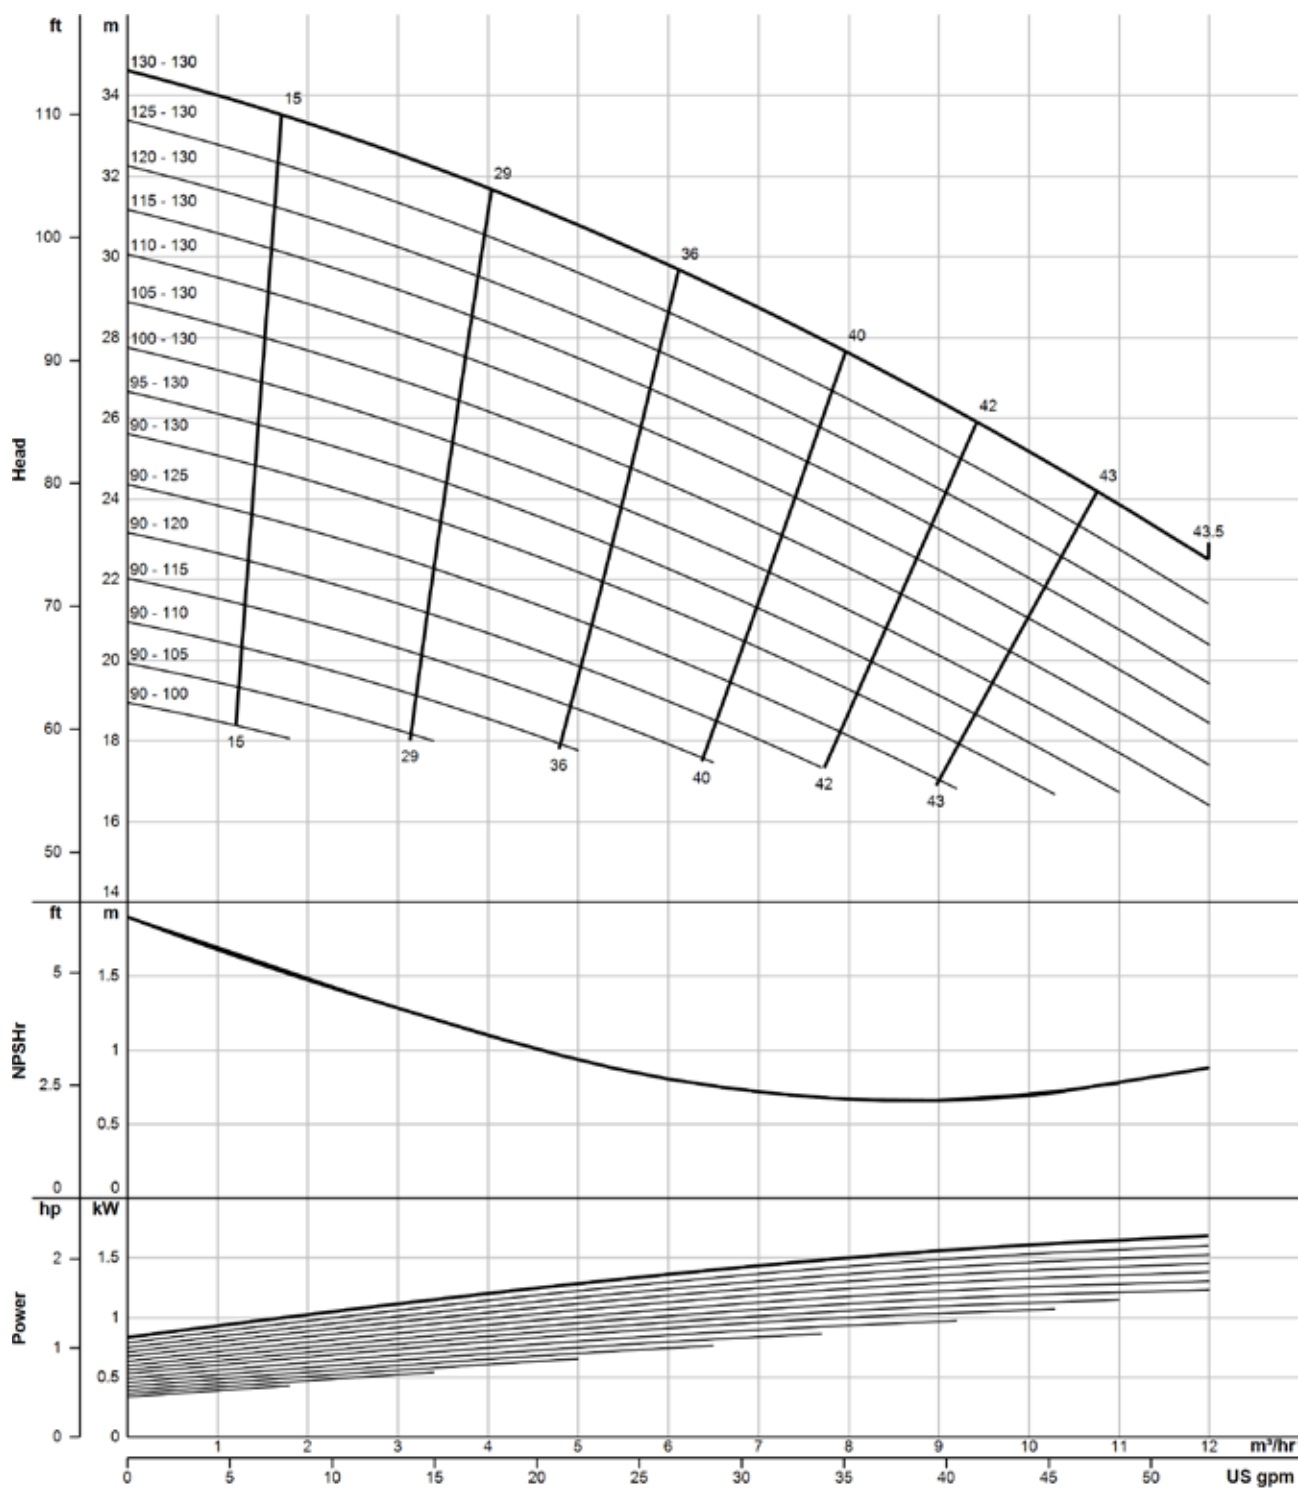


The flow charts are based on water, temperature 20 °C

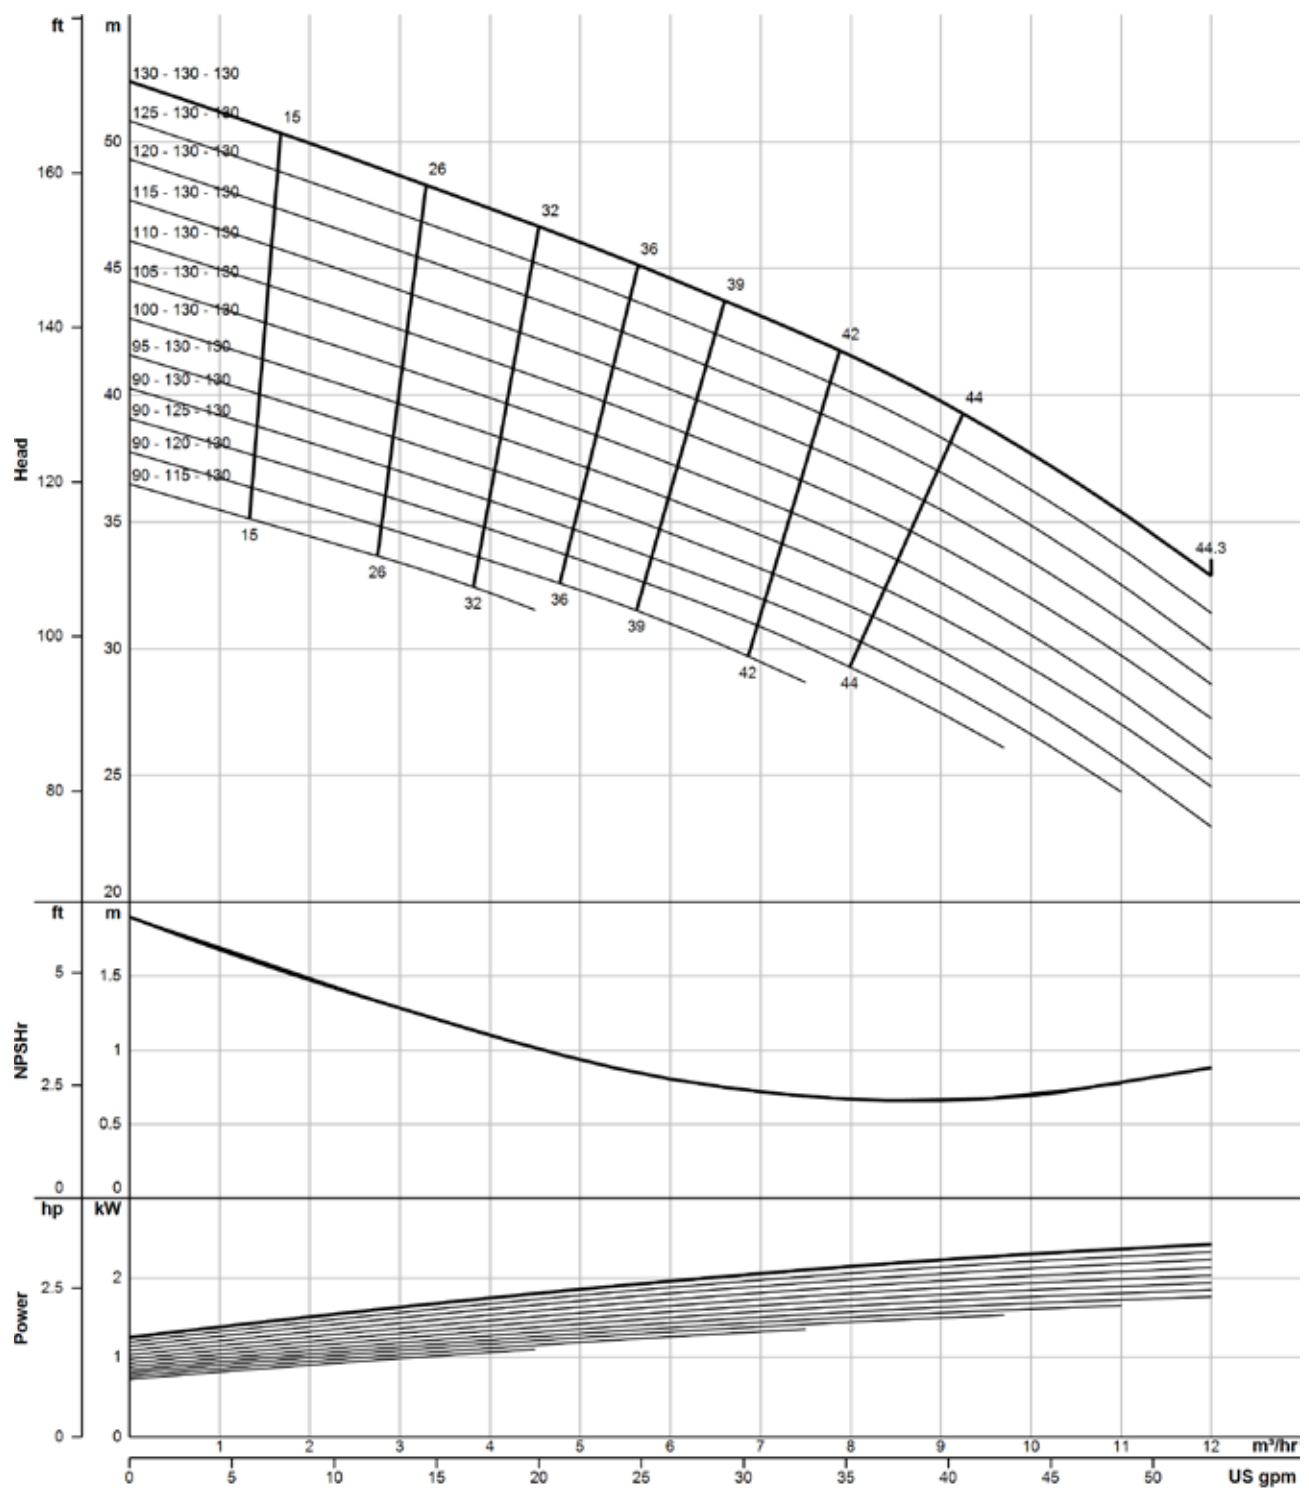


The flow charts are based on water, temperature 20 °C

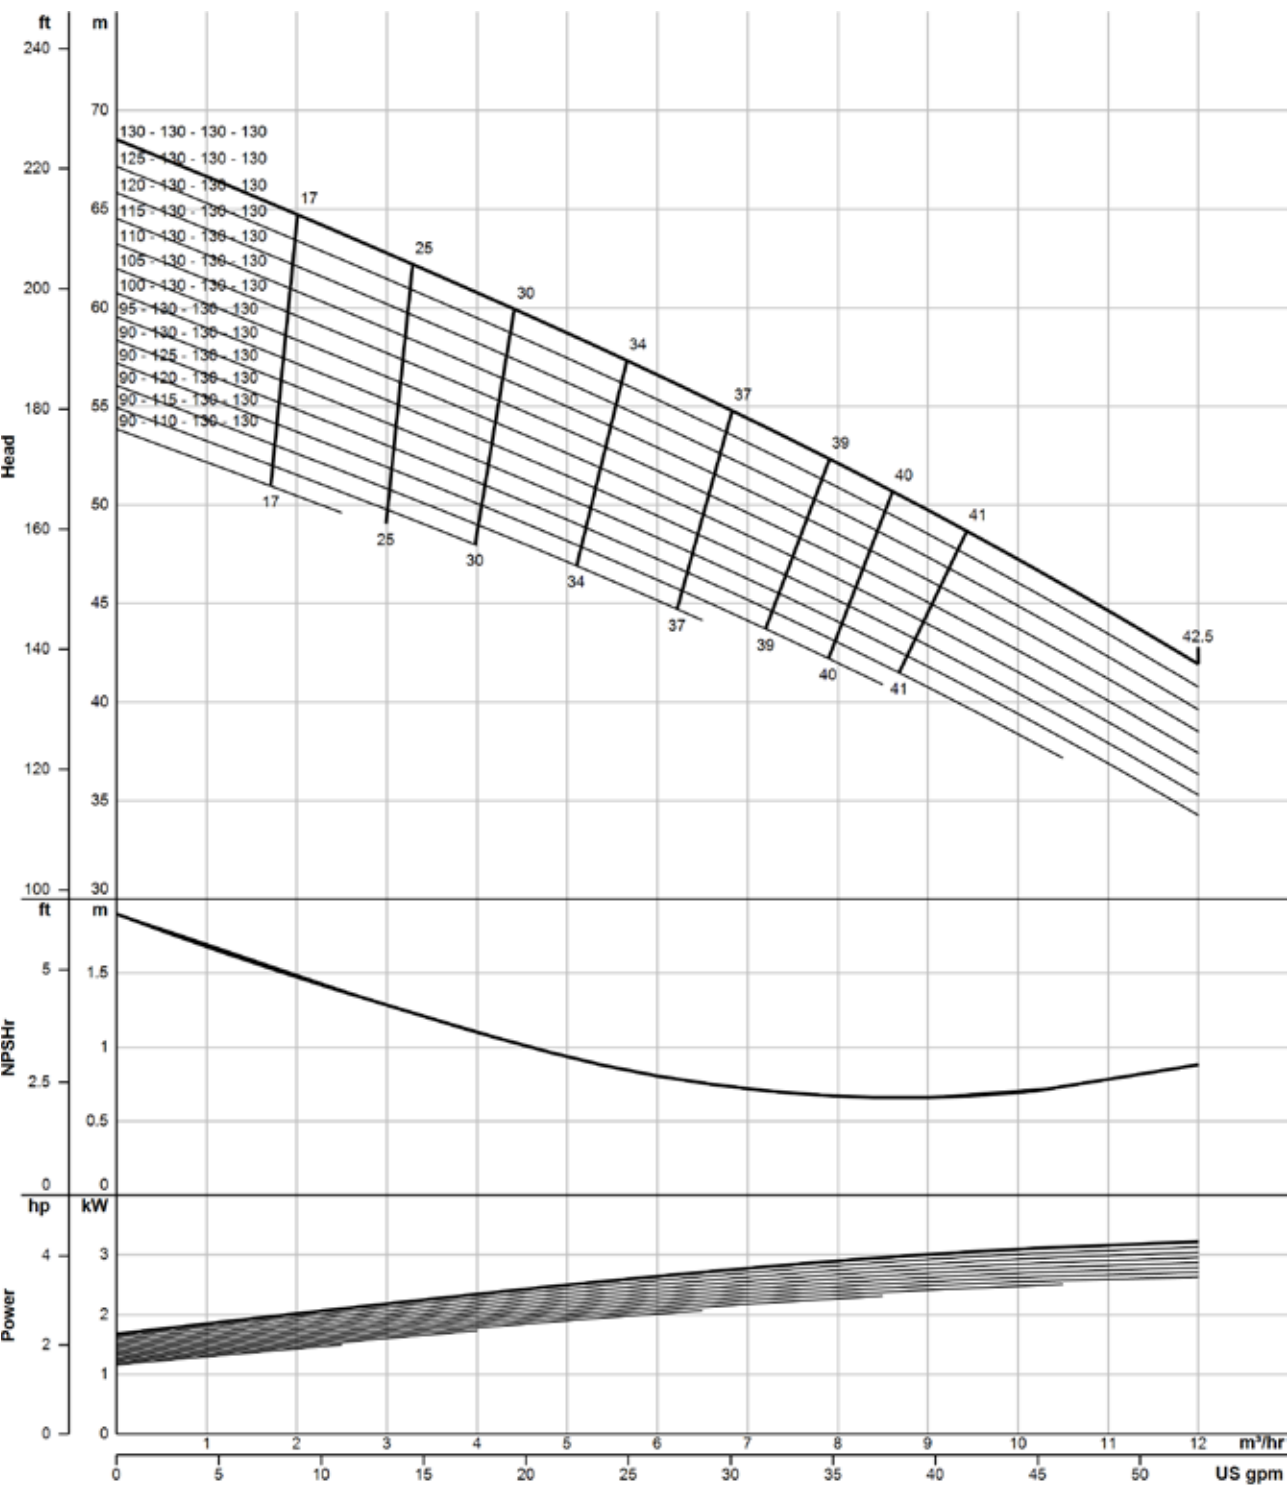


The flow charts are based on water, temperature 20 °C

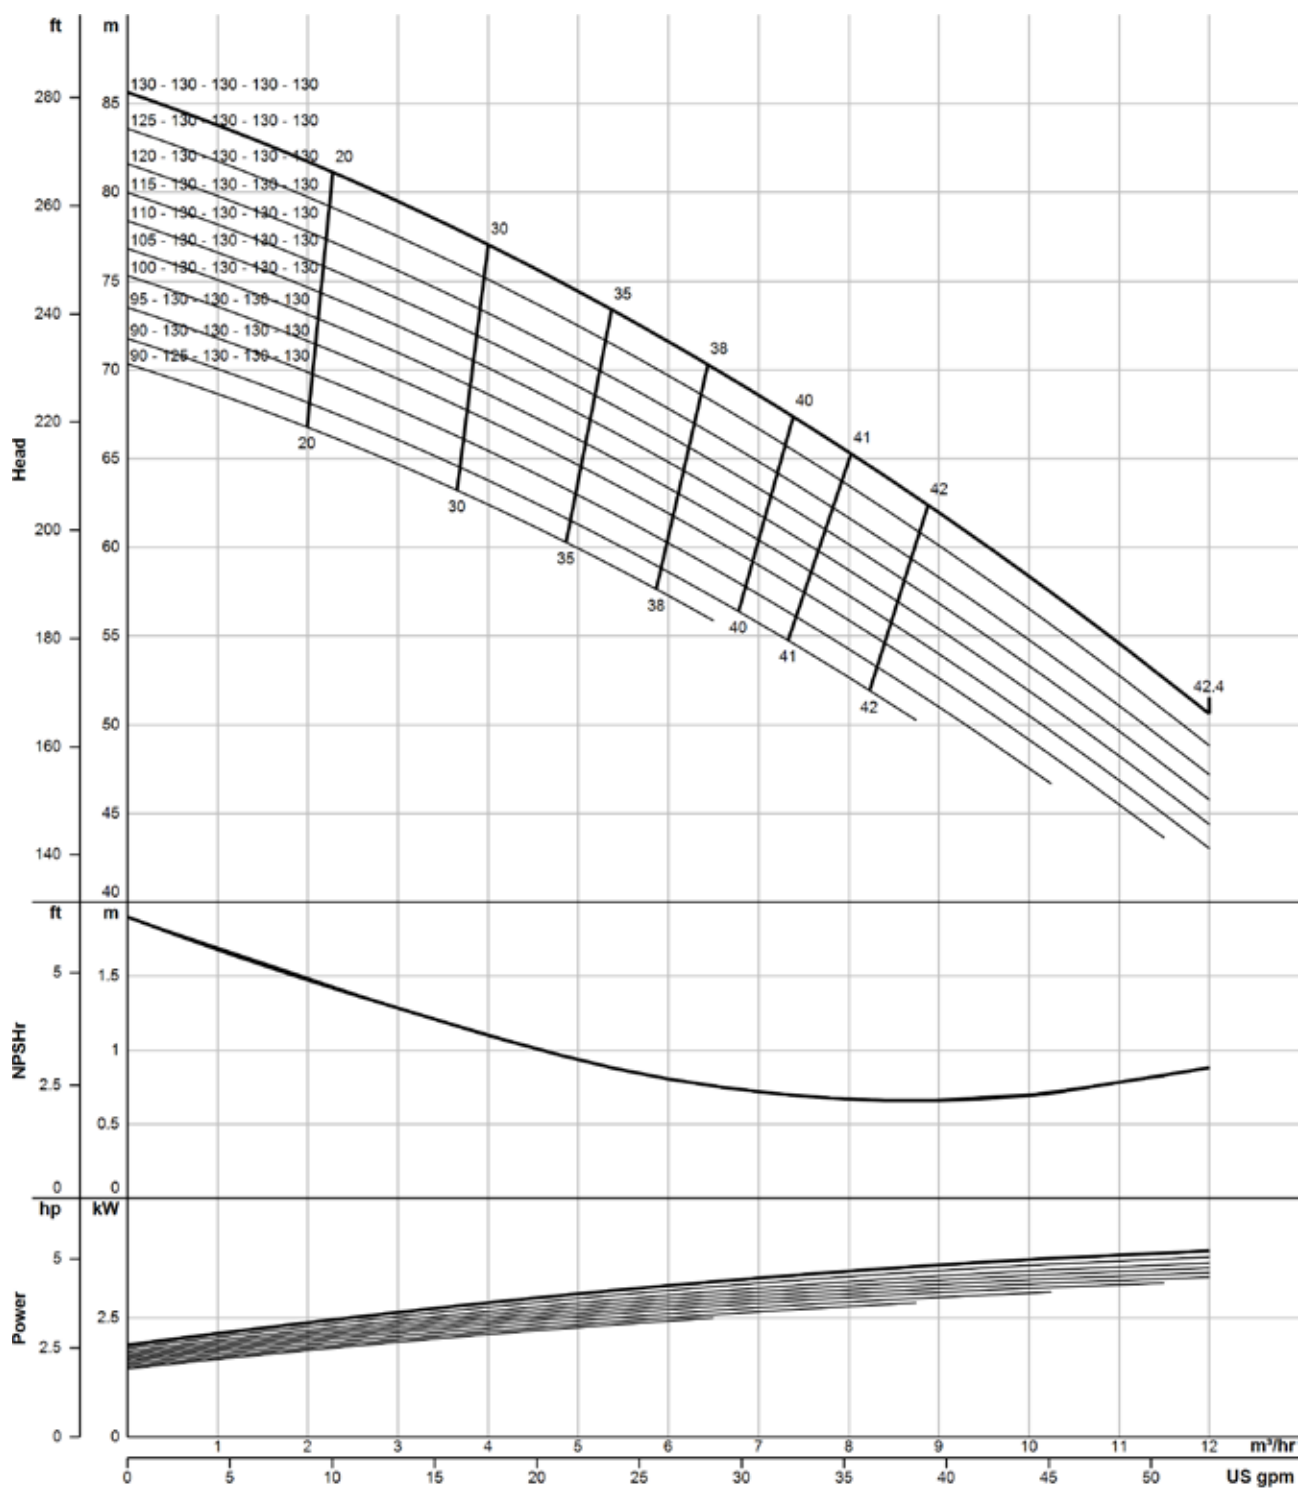


The flow charts are based on water, temperature 20 °C

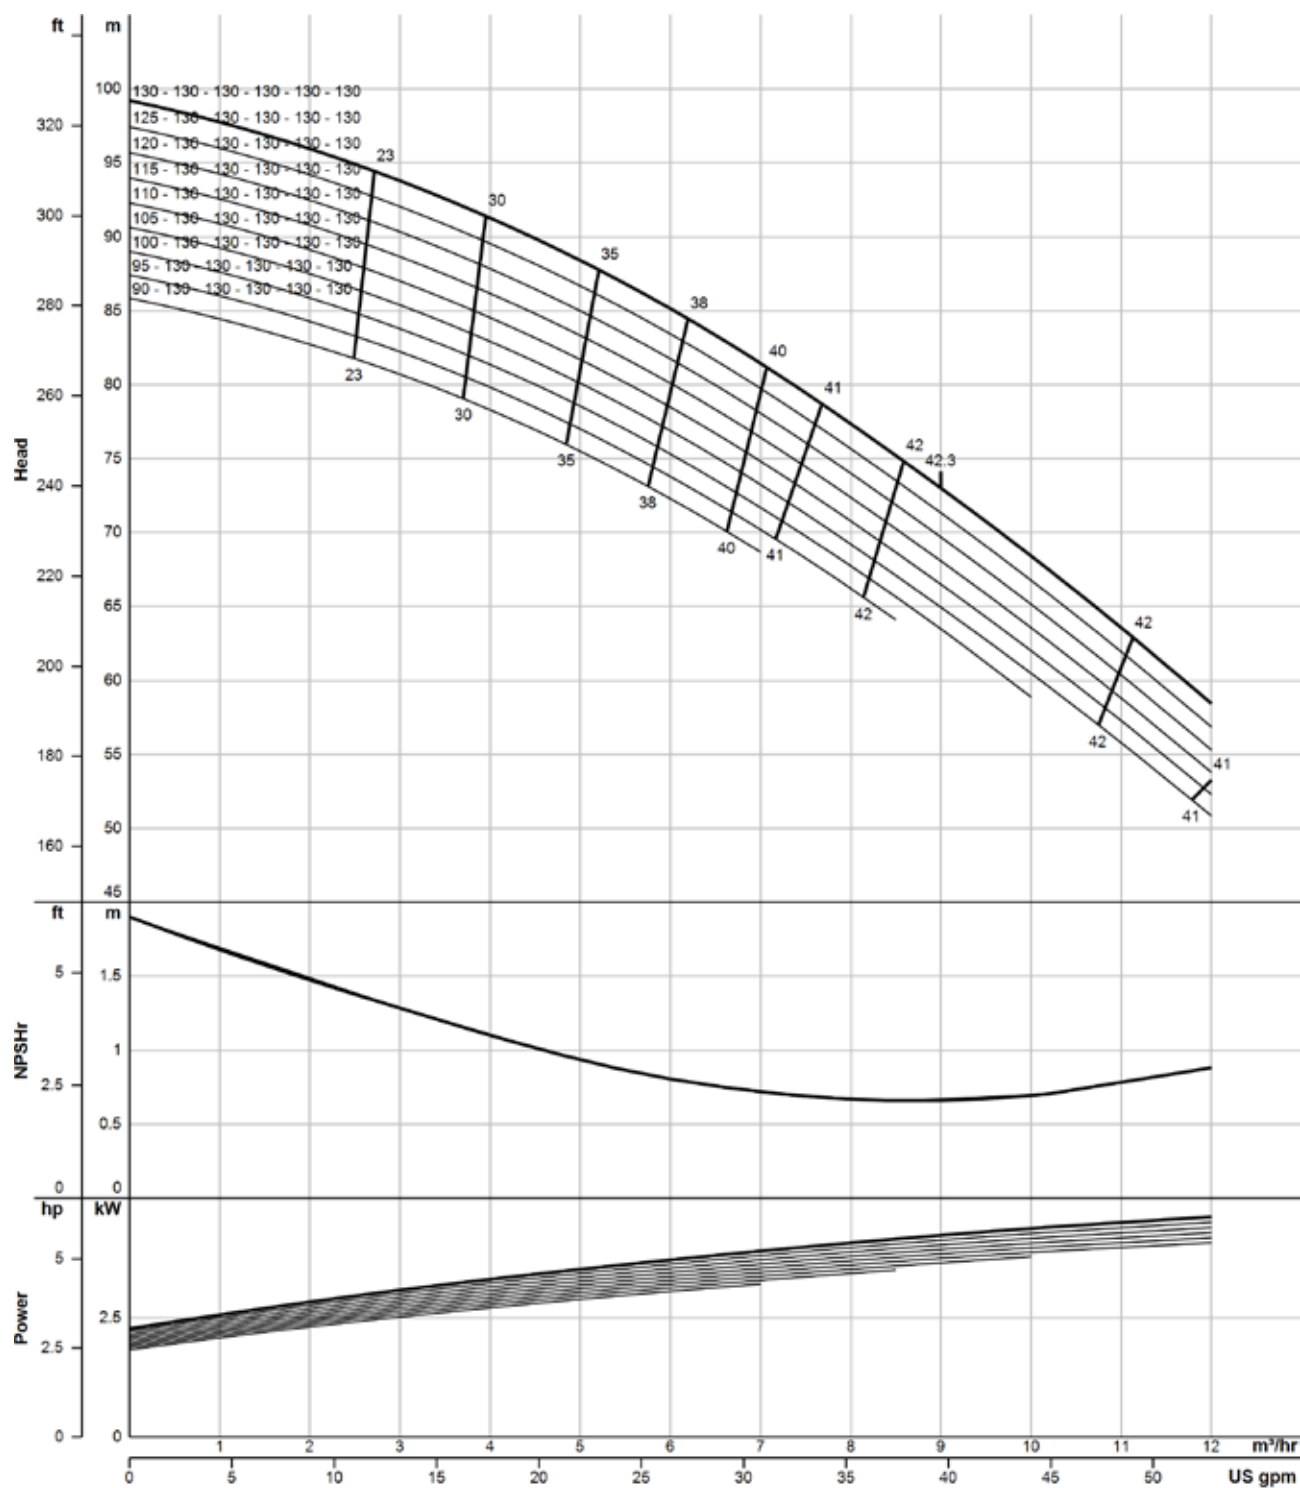

The flow charts are based on water, temperature 20 °C

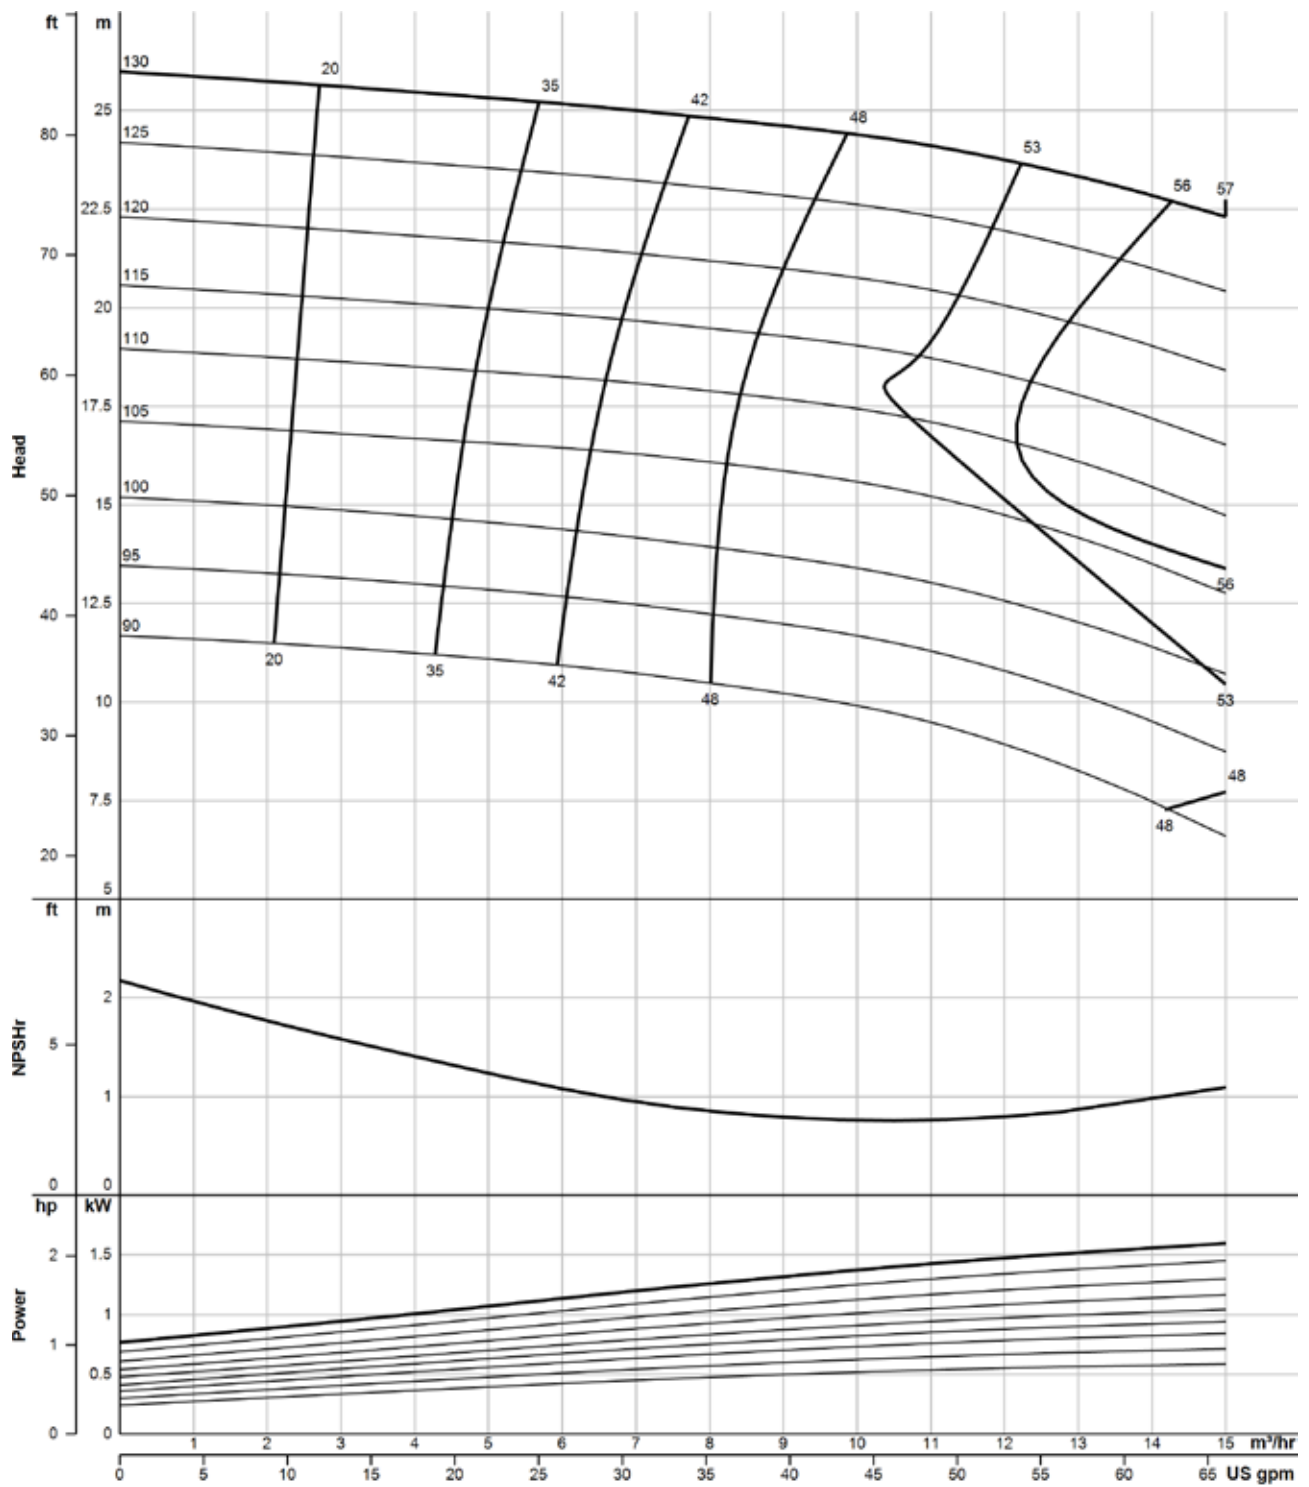


The flow charts are based on water, temperature 20 °C

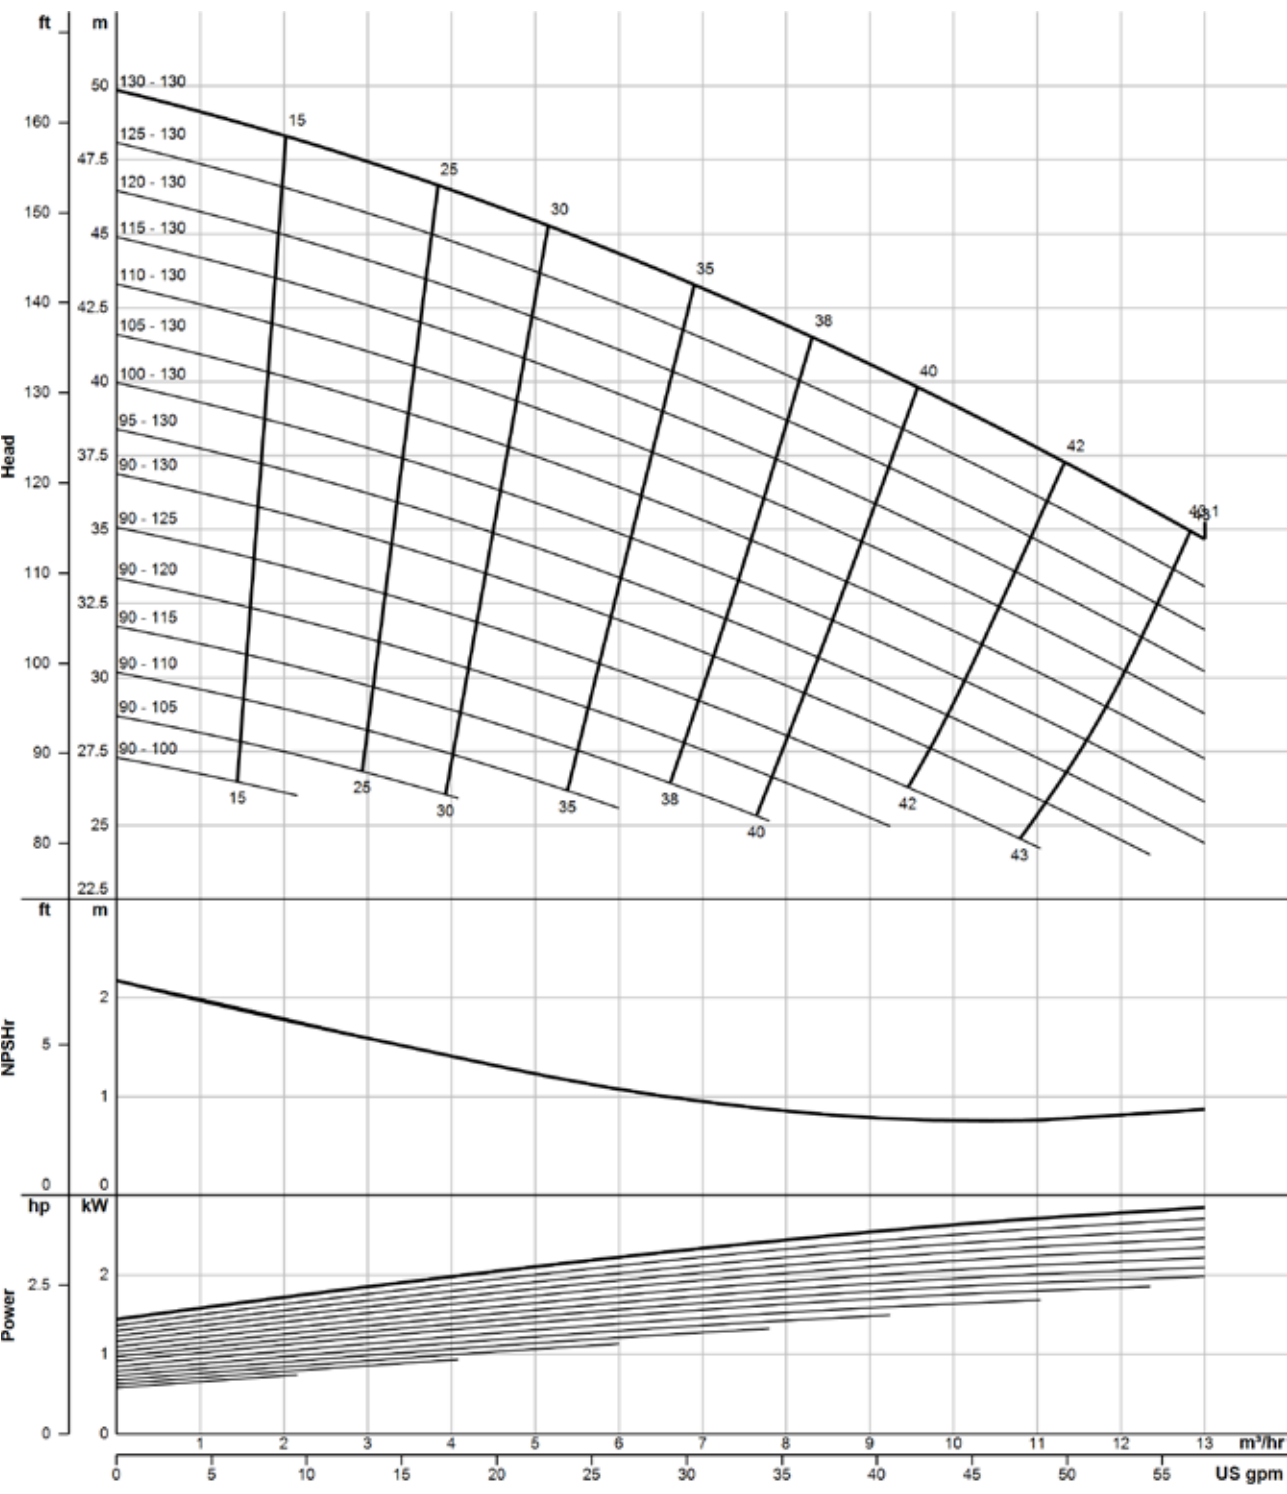


The flow charts are based on water, temperature 20 °C



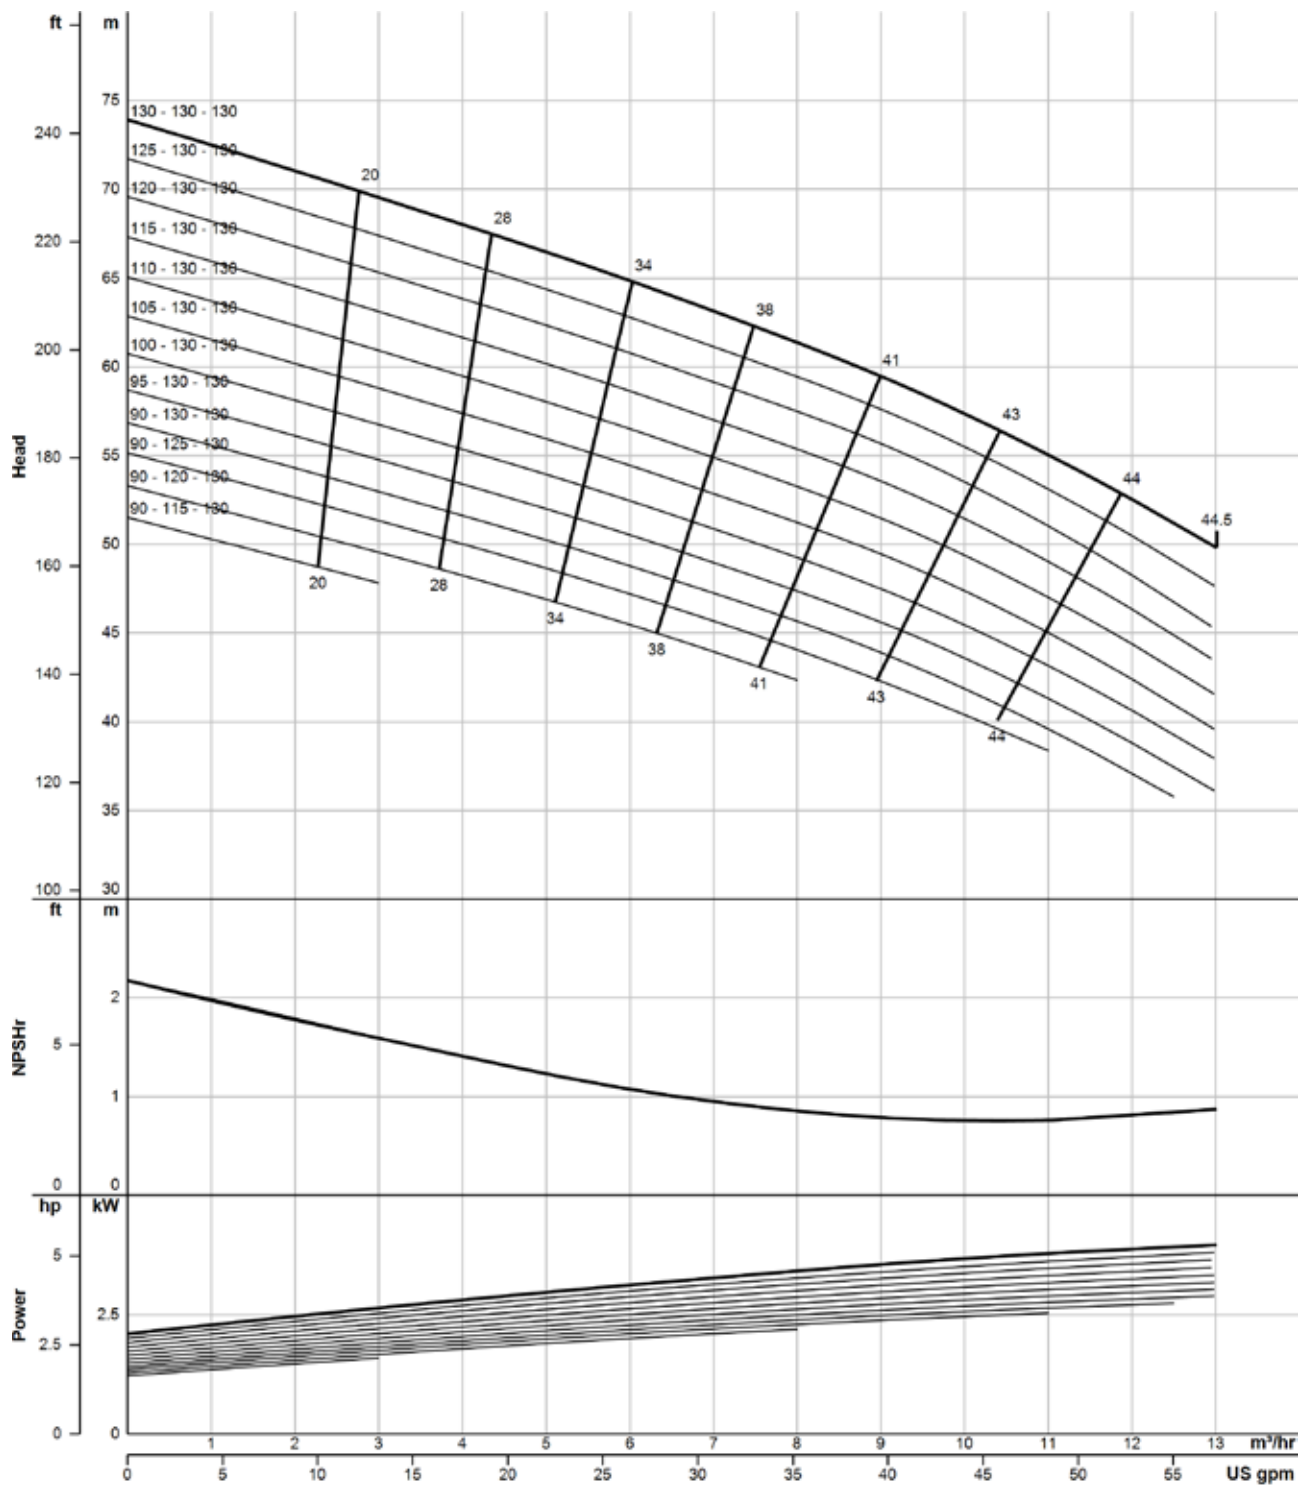


The flow charts are based on water, temperature 20 °C

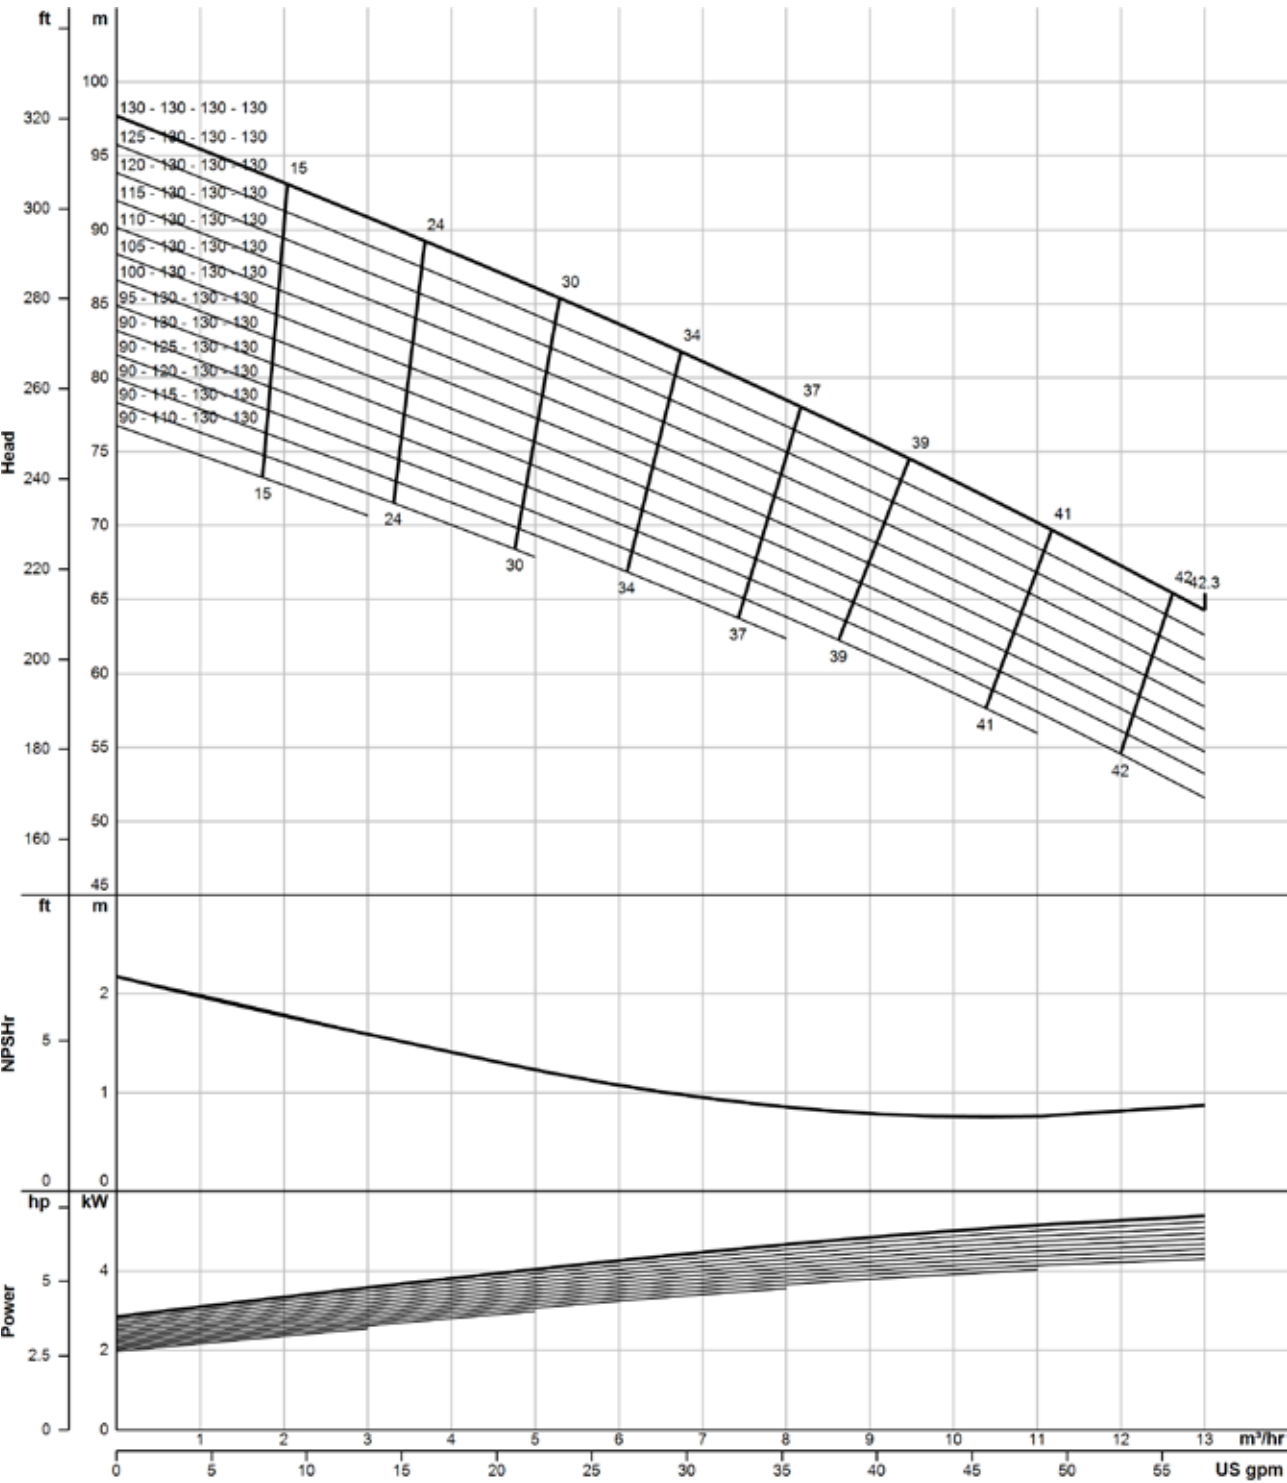

The flow charts are based on water, temperature 20 °C



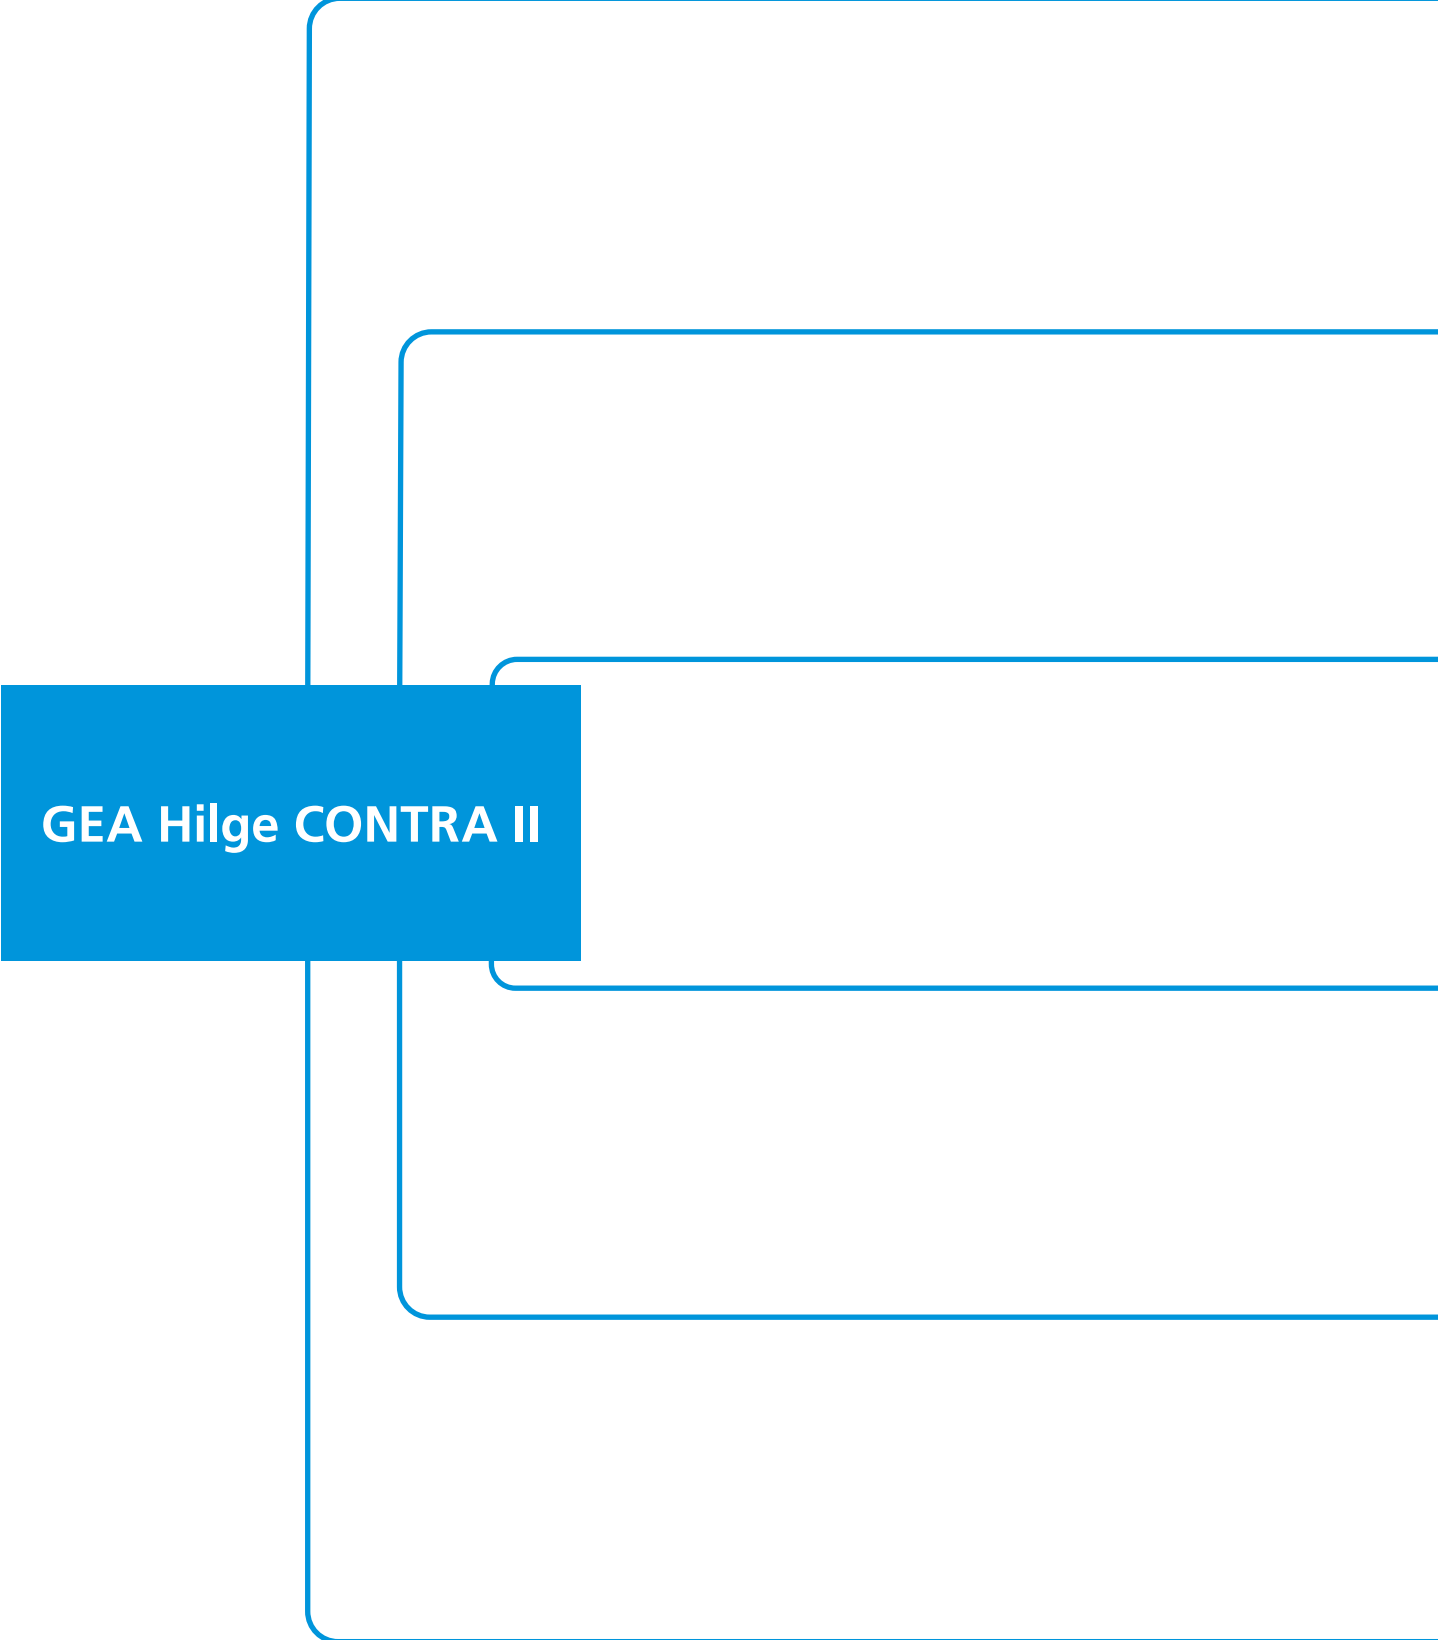

GEA Hilge CONTRA II

GEA Hilge CONTRA II Bloc

GEA Hilge CONTRA II Bloc-SUPER

GEA Hilge CONTRA II Bloc-V

GEA Hilge CONTRA II Adapta

GEA Hilge CONTRA II Adapta-SUPER

GEA Hilge CONTRA II Adapta-V




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar

Certificates



* registered for recertification

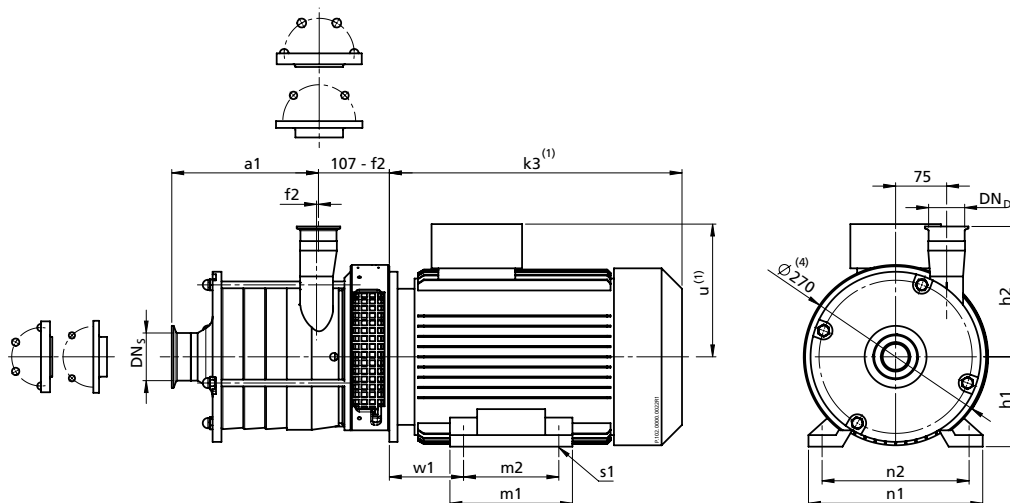

2-pole

P2 [kW]	IEC- size	h ₁ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	w1 [mm]	m1 [mm]	m2 [mm]	n1 [mm]	n2 [mm]	s1 [mm]	Weight [kg]
4.0	112M	112	340	175	70	175	140	220	190	12×16	64
5.5	112M	132	430	200	109	180	140	256	216	12×16	70
7.5	132S	132	430	200	109	180	140	256	216	12×16	78
11.0	132M	132	450	200	109	210	178	260	216	12×16	116
15.0	160M	160	530	225	120	260	210	320	254	15×19	125
18.5	160L	160	565	225	120	305	254	320	254	15×19	140

Dimensions depend on the casing size (DN_s, DN_D, a1, h2, e1). See table of connections.

⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.


⁽⁴⁾ Largest diameter for pump without motor.

Weight: net-weight without packaging



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3×380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar
Certificates	

* registered for recertification

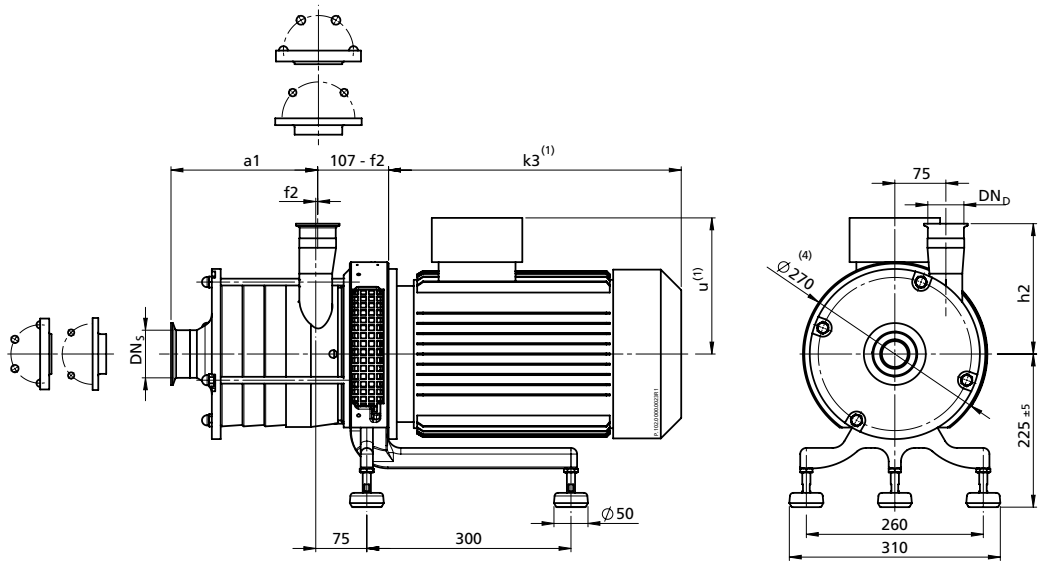

2-pole


P2 [kW]	IEC- size	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	Weight [kg]
4.0	112M	340	175	67
5.5	112M	430	200	74
7.5	132S	430	200	81
11.0	132M	450	200	120

Dimensions depend on the casing size (DN_s, DN_D, a1, h2, e1). See table of connections.
⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.
⁽⁴⁾ Largest diameter for pump without motor.
Weight: net-weight without packaging



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar
Certificates	 

* registered for recertification

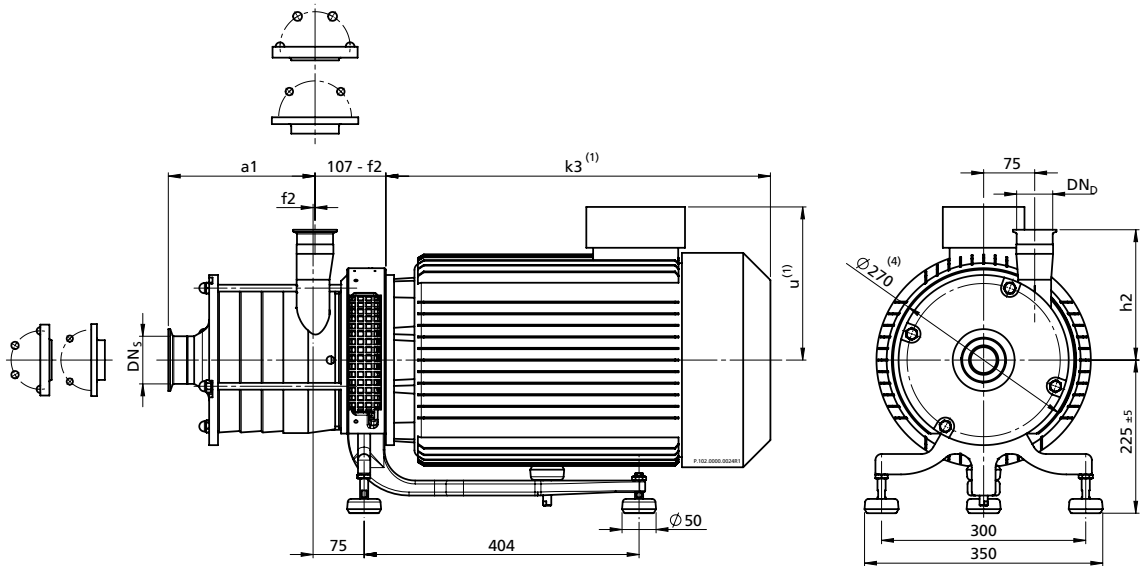

2-pole


P2 [kW]	IEC- size	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	Weight [kg]
15.0	160M	530	225	131
18.5	160L	565	255	146

Dimensions depend on the casing size (DN_s, DN_D, a1, h2, e1). See table of connections.
⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.
⁽⁴⁾ Largest diameter for pump without motor.
Weight: net-weight without packaging



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar
Certificates	

* registered for recertification

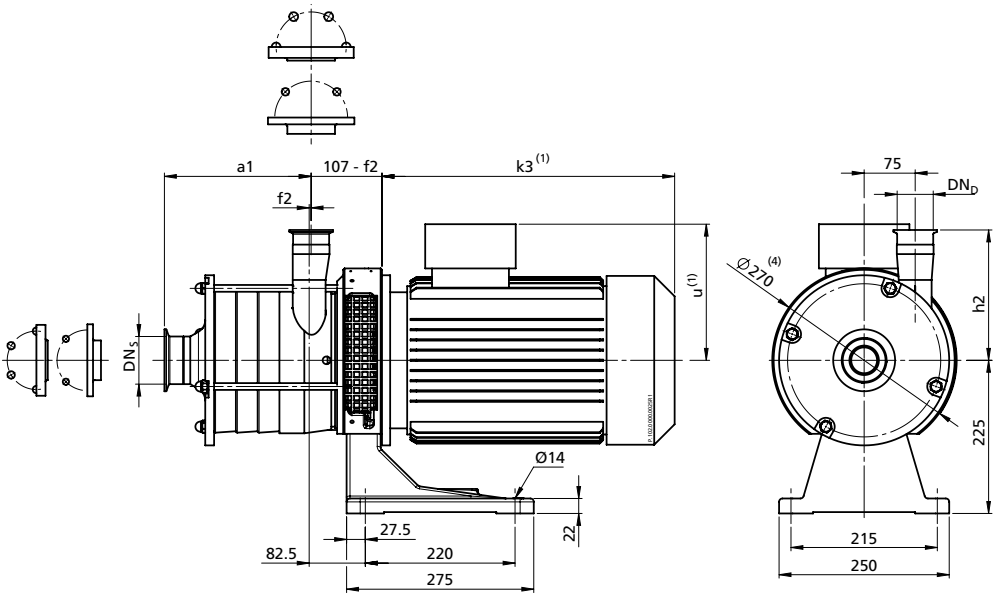

2-pole

P2 [kW]	IEC- size	$k_3^{(1)}$ [mm]	$u^{(1)}$ [mm]	Weight [kg]
4.0	112M	340	175	72
5.5	112M	430	200	78
7.5	132S	430	200	86
11.0	132M	450	200	124

Dimensions depend on the casing size (DN_s, DN_b, a1, h2, e1). See table of connections.
⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.
⁽⁴⁾ Largest diameter for pump without motor.
 Weight: net-weight without packaging




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar

Certificates



* registered for recertification

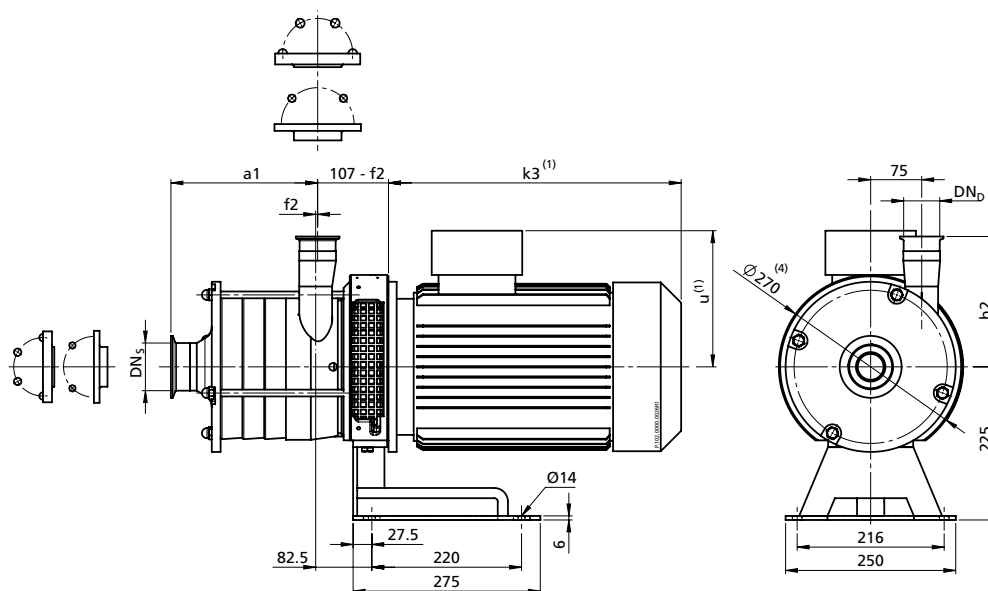

2-pole

P2 [kW]	IEC- size	$k_3^{(1)}$ [mm]	$u^{(1)}$ [mm]	Weight [kg]
4.0	112M	340	175	68
5.5	112M	430	200	75
7.5	132S	430	200	82
11.0	132M	430	200	121

Dimensions depend on the casing size (DN_s , DN_p , a_1 , h_2 , e_1). See table of connections.

⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.


⁽⁴⁾ Largest diameter for pump without motor.

Weight: net-weight without packaging



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar
Certificates	 

* registered for recertification

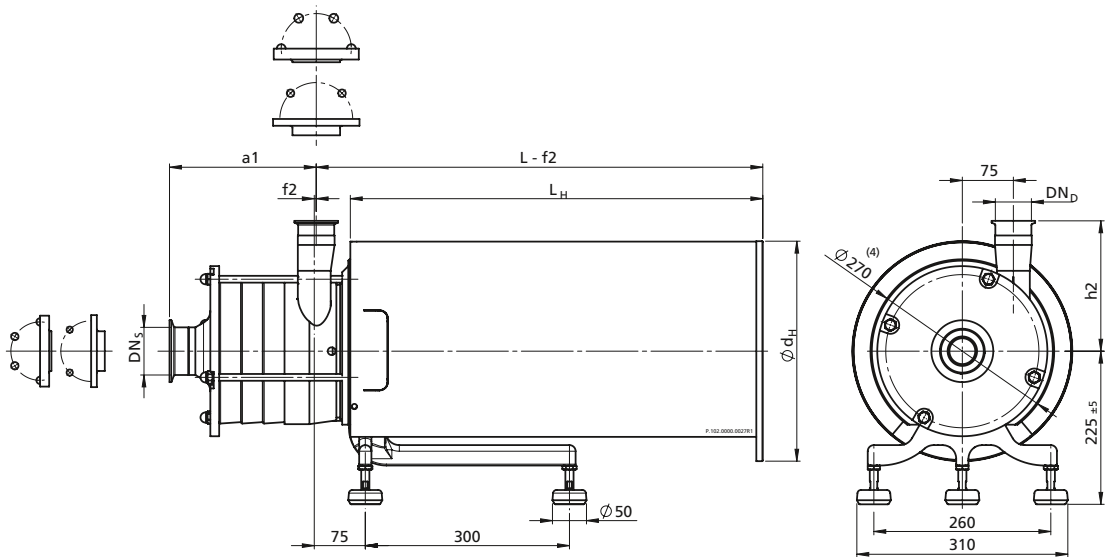

2-pole

P2 [kW]	IEC- size	L [mm]	L _H [mm]	ød _H [mm]	Weight [kg]
4.0	112M	573	550	270	72
5.5	112M	573	550	270	79
7.5	132S	653	640	320	88
11.0	132M	653	640	320	127

Dimensions depend on the casing size (DN_S, DN_D, a1, h2, e1). See table of connections.


⁽⁴⁾ Largest diameter for pump without motor.

Weight: net-weight without packaging



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar
Certificates	 

* registered for recertification

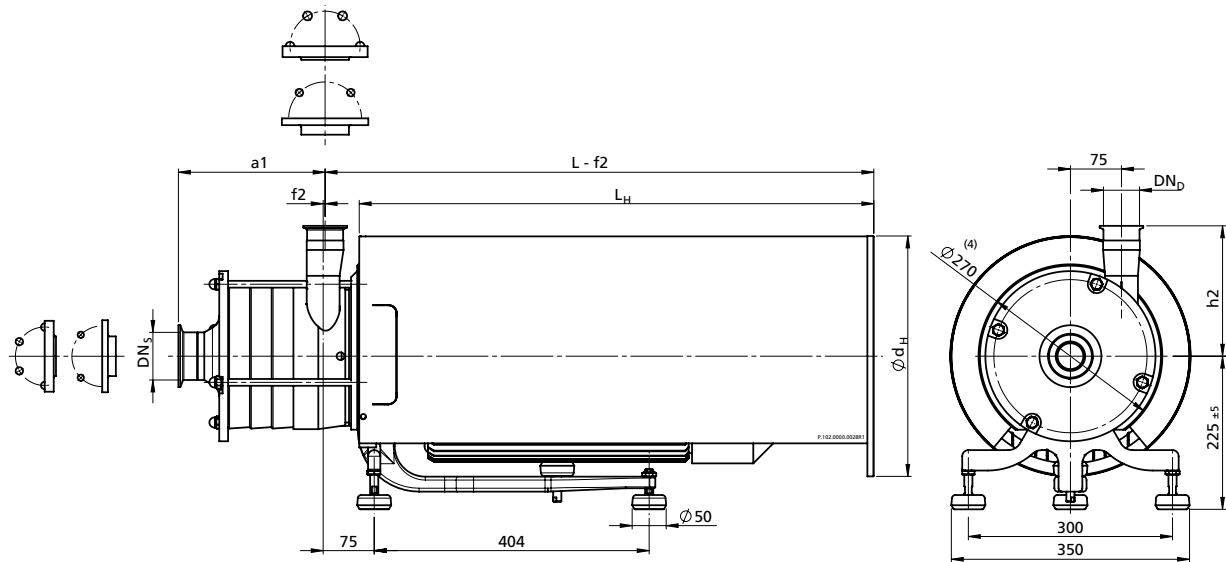

2-pole


P2 [kW]	IEC- size	L [mm]	L _H [mm]	ød _H [mm]	Weight [kg]
15.0	160M	803	750	350	140
18.5	160L	803	750	350	155

Dimensions depend on the casing size (DN_S, DN_D, a1, h2, e1). See table of connections.
(4) Largest diameter for pump without motor.
Weight: net-weight without packaging



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar
Certificates	 

* registered for recertification

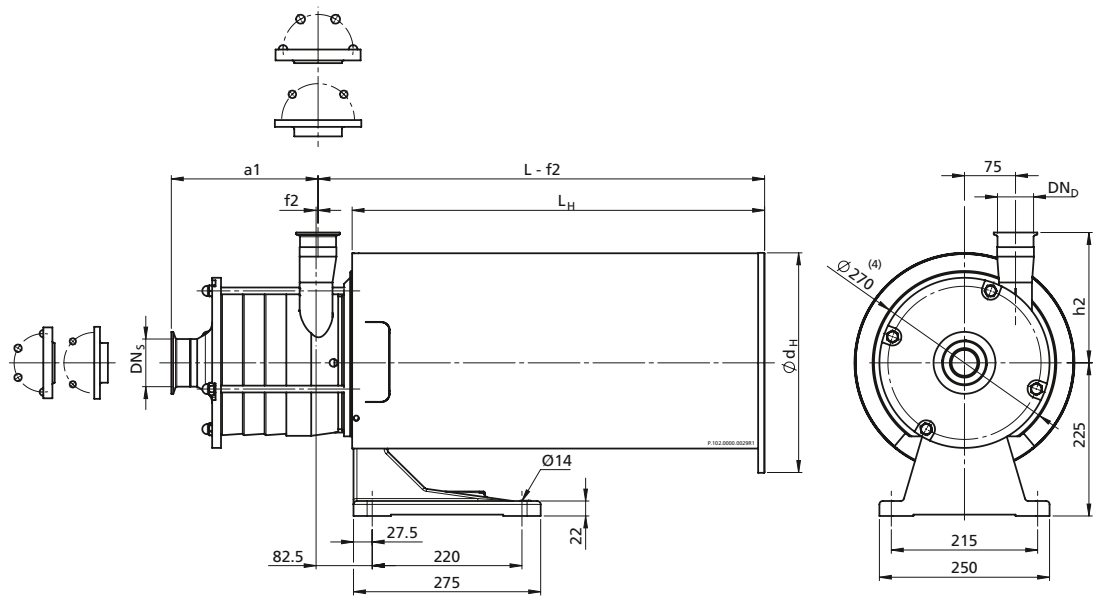

2-pole

P2 [kW]	IEC- size	L [mm]	L _H [mm]	ød _H [mm]	Weight [kg]
4.0	112M	573	550	270	77
5.5	112M	573	550	270	83
7.5	132S	653	640	320	93
11.0	132M	653	640	320	131
15.0	160M	803	750	350	142
18.5	160L	803	750	350	157

Dimensions depend on the casing size (DN_s, DN_D, a1, h2, e1). See table of connections.
(4) Largest diameter for pump without motor.
Weight: net-weight without packaging




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar

Certificates



* registered for recertification

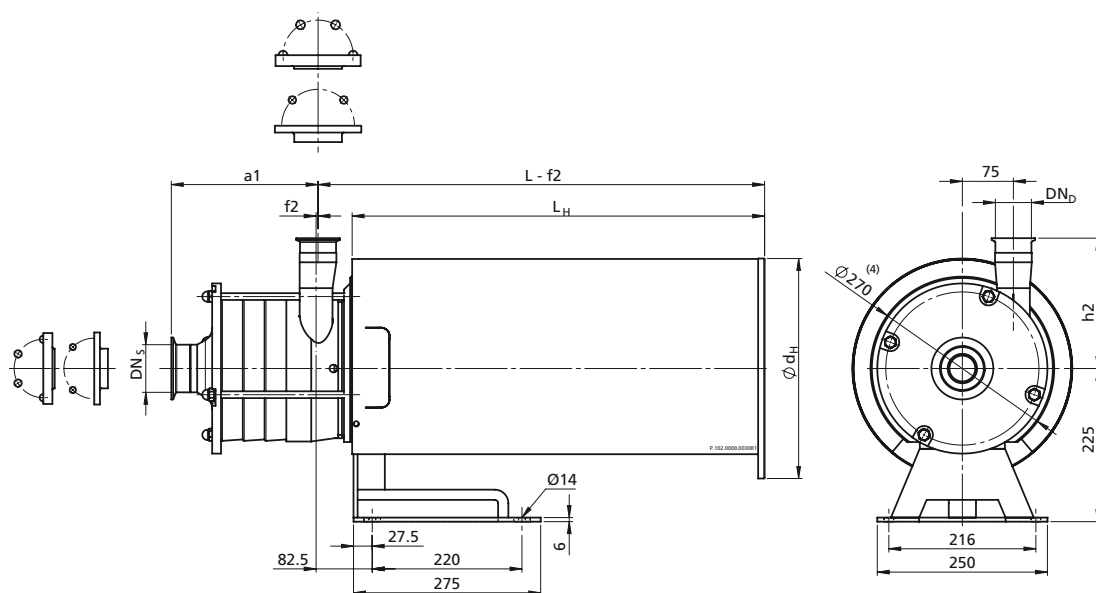

2-pole

P2 [kW]	IEC- size	L [mm]	L _H [mm]	ød _H [mm]	Weight [kg]
4.0	112M	573	550	270	73
5.5	112M	573	550	270	80
7.5	132S	653	640	320	89
11.0	132M	653	640	320	128
15.0	160M	803	750	350	138
18.5	160L	803	750	350	153

Dimensions depend on the casing size (DN_s, DN_D, a1, h2, e1). See table of connections.

(4) Largest diameter for pump without motor.

Weight: net-weight without packaging




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar

Certificates



* registered for recertification

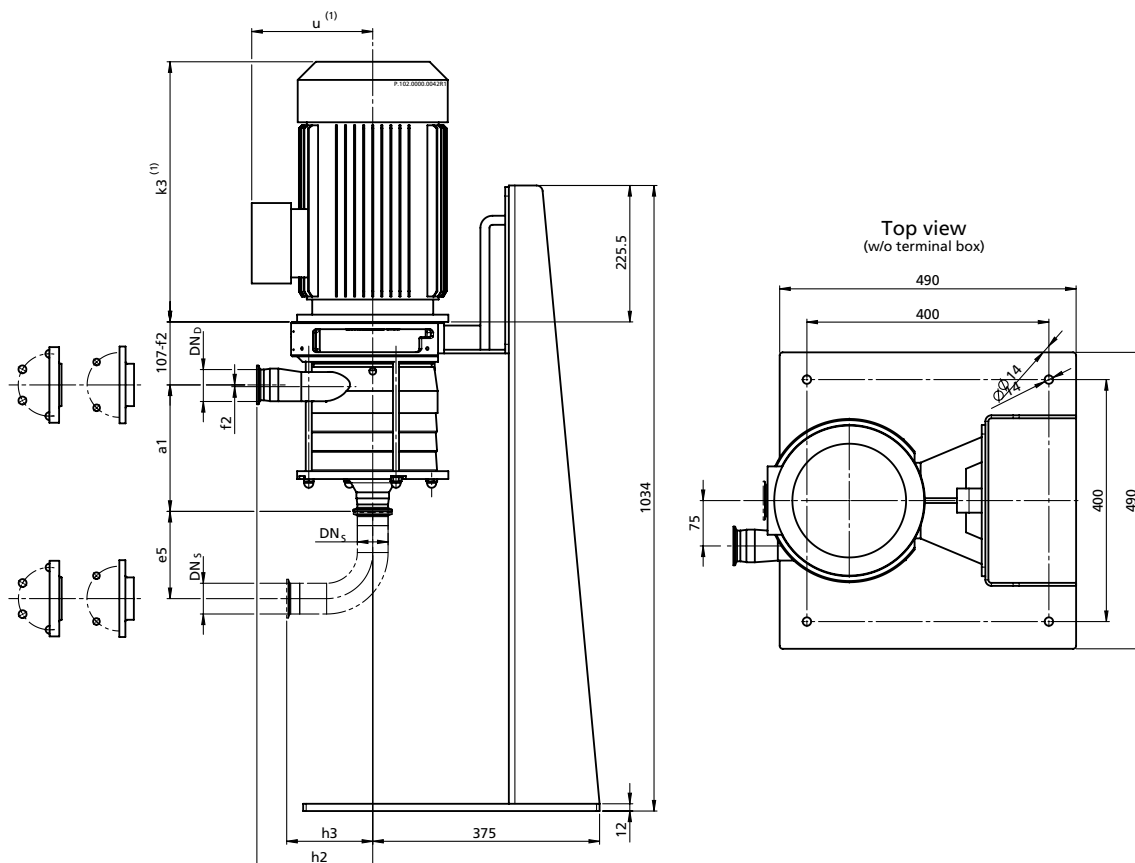

2-pole

P2 [kW]	IEC- size	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	Weight [kg]
4.0	112M	340	175	110
5.5	112M	430	200	117
7.5	132S	430	200	124
11.0	132M	450	200	163
15.0	160M	530	225	172
18.5	160L	565	225	187

Dimensions depend on the casing size (DN_s, DN_D, a1, h2, e1). See table of connections.

⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.

Weight: net-weight without packaging




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar

Certificates



* registered for recertification

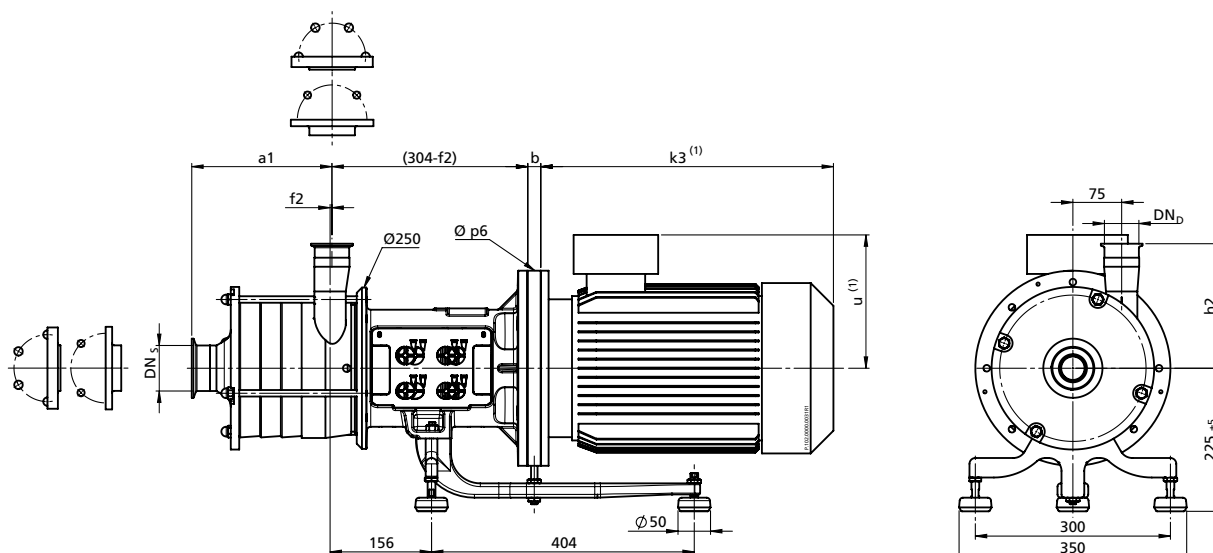

2-pole

				Standard		tronic		
P2 [kW]	IEC- size	b [mm]	p ₆ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	Weight [kg]
4.0	112M	0	250	380	185	334	201	95
5.5	132S	20	300	450	205	365	201	121
7.5	132S	20	300	450	205	389	237	130


Dimensions depend on the casing size (DN_s, DN_D, a1, h2, e1). See table of connections.

⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.
Weight: net-weight without packaging for standard motor



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar
Certificates	 

* registered for recertification

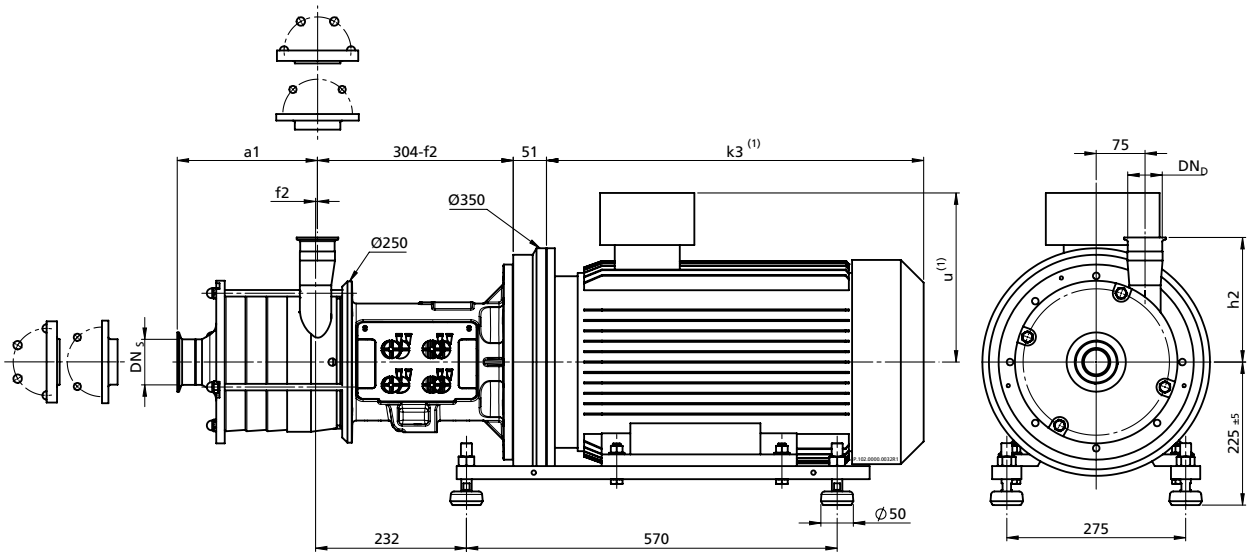

2-pole


				Standard		tronic		
P2 [kW]	IEC- size	b [mm]	p ₆ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	Weight [kg]
11.0	160M	51	350	570	260	406	237	163
15.0	160M	51	350	570	260	471	308	170
18.5	160L	51	350	580	260	515	308	192

Dimensions depend on the casing size (DN_s, DN_D, a1, h2, e1). See table of connections.
⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.
Weight: net-weight without packaging



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar
Certificates	 

* registered for recertification

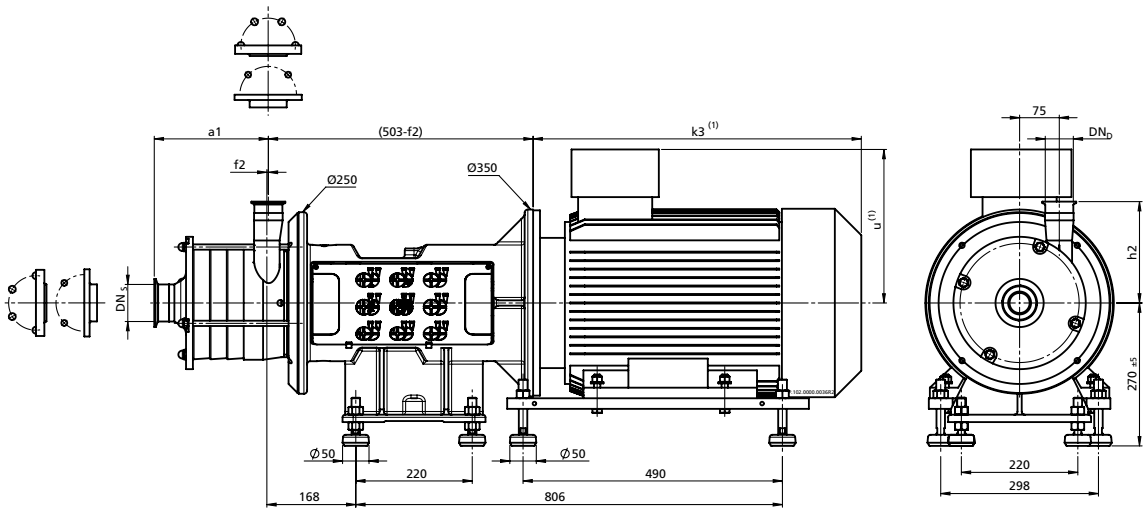

2-pole


		Standard		tronic		Weight [kg]
P2 [kW]	IEC- size	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	
22.0	180L	620	290	541	308	283

Dimensions depend on the casing size (DN_s, DN_b, a1, h2, e1). See table of connections.
⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.
Weight: net-weight without packaging



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar
Certificates	 

* registered for recertification

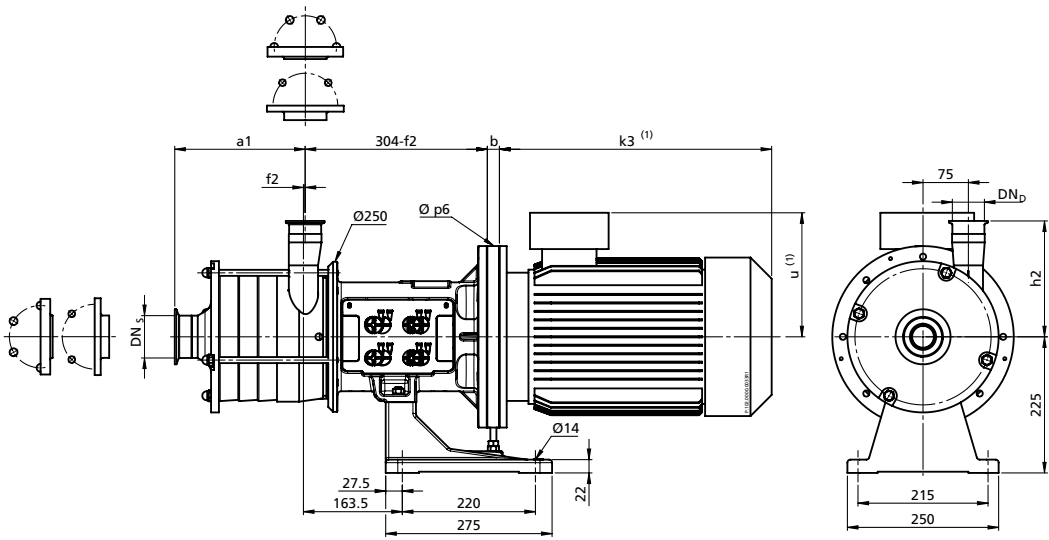

2-pole

				Standard		tronic		Weight [kg]
P2 [kW]	IEC- size	b [mm]	p ₆ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	
4.0	112M	0	250	380	185	334	201	97
5.5	132S	20	300	450	205	365	201	123
7.5	132S	20	300	450	205	389	237	132

Dimensions depend on the casing size (DN_s, DN_p, a1, h2, e1). See table of connections.
⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.
 Weight: net-weight without packaging




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar

Certificates



* registered for recertification

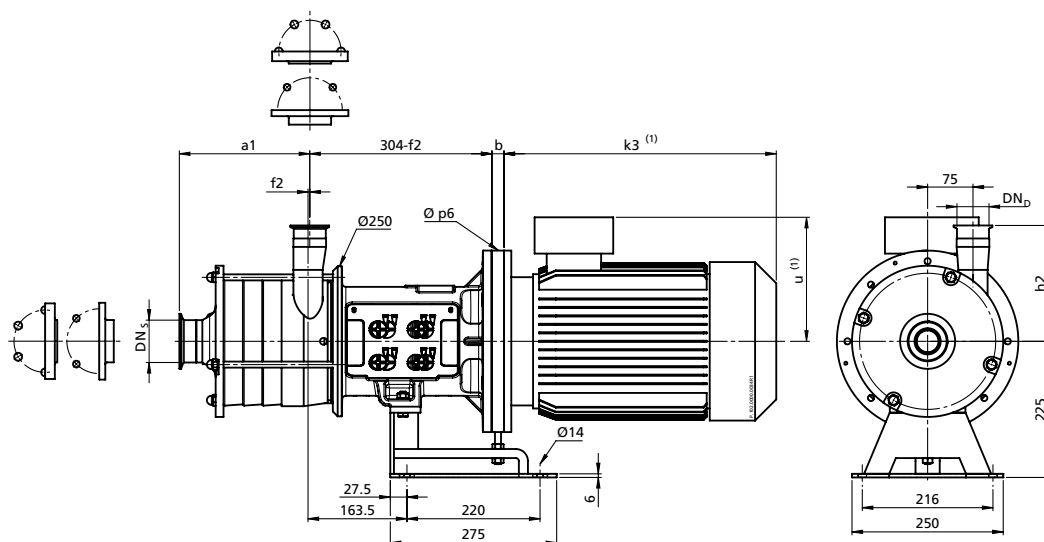

2-pole

				Standard		tronic		
P2 [kW]	IEC- size	b [mm]	p ₆ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	Weight [kg]
4.0	112M	0	250	380	185	334	201	93
5.5	132S	20	300	450	205	365	201	120
7.5	132S	20	300	450	205	389	237	129

Dimensions depend on the casing size (DN_s, DN_D, a1, h2, e1). See table of connections.


⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.

Weight: net-weight without packaging



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar
Certificates	 

* registered for recertification

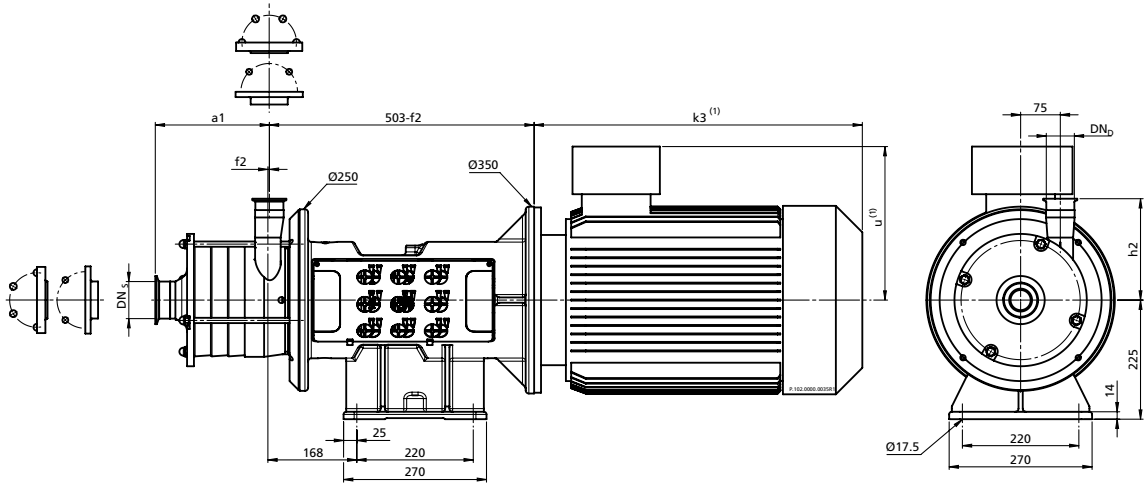

2-pole


		Standard		tronic		Weight [kg]
P2 [kW]	IEC- size	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	
22.0	180M	620	290	541	308	273

Dimensions depend on the casing size (DN_s, DN_p, a1, h2, e1). See table of connections.
⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.
Weight: net-weight without packaging



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar
Certificates	 

* registered for recertification

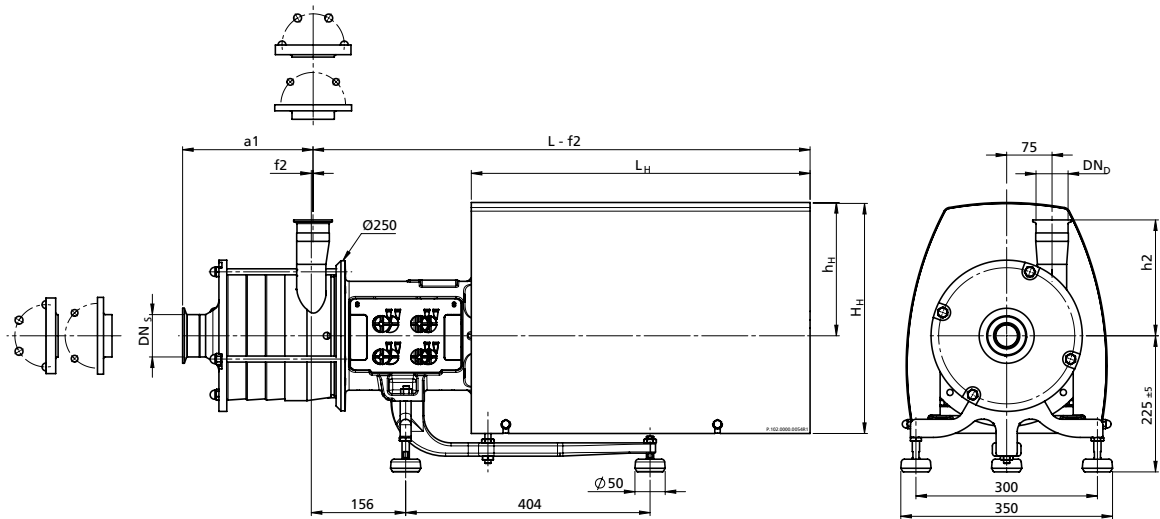

2-pole


P2 [kW]	IEC- size	L [mm]	L _H [mm]	H _H [mm]	h _H [mm]	Weight [kg]
4.0	112M	734.5	471	382	241	102
5.5	132S	825.0	561	382	220	129
7.5	132S	825.0	561	382	220	138

Dimensions depend on the casing size (DN_s, DN_p, a1, h2, e1). See table of connections.
Weight: net-weight without packaging



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar
Certificates	 


* registered for recertification

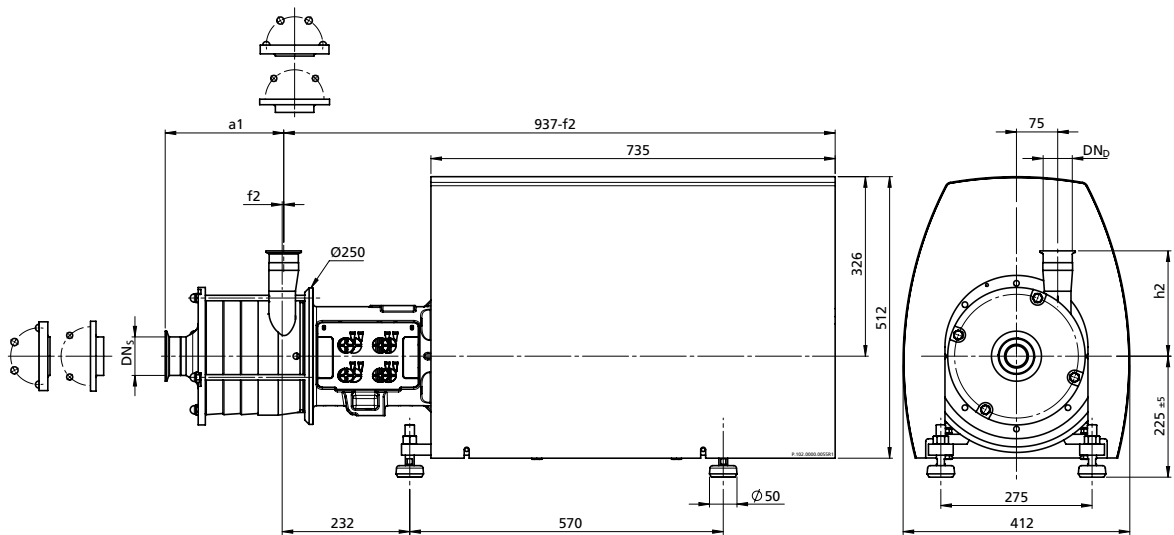

2-pole


P2 [kW]	IEC- size	L [mm]	L _H [mm]	H _H [mm]	h _H [mm]	Weight [kg]
11.0	160M	734.5	471	382	241	175
15.0	160M	825.0	561	382	220	182
18.5	160L	825.0	561	382	220	204

Dimensions depend on the casing size (DN_s, DN_p, a1, h2, e1). See table of connections.
Weight: net-weight without packaging



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar
Certificates	 


* registered for recertification

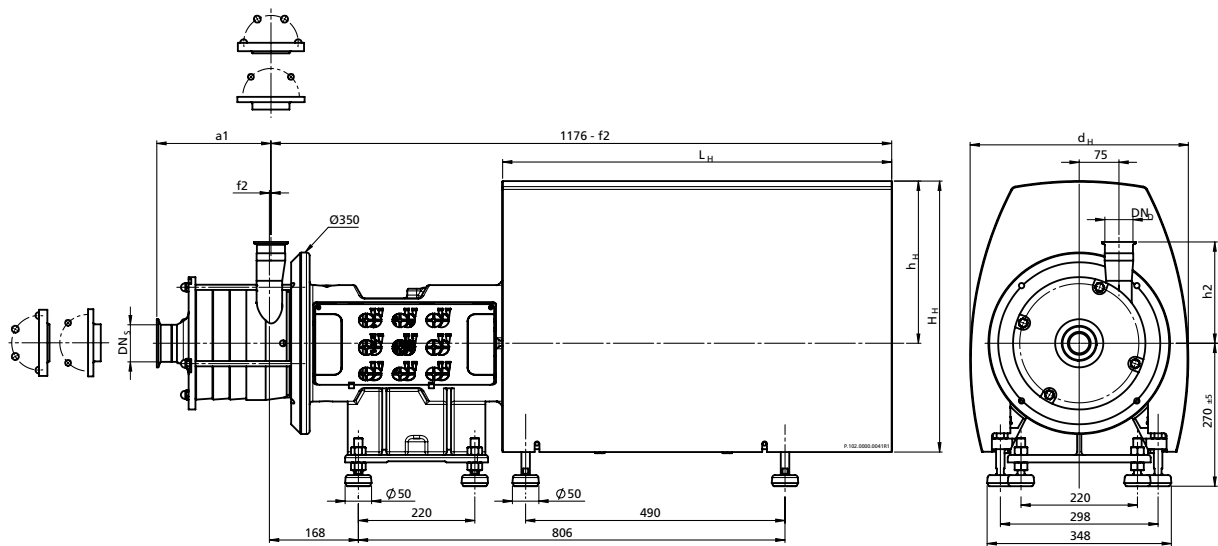

2-pole


P2 [kW]	IEC- size	L _H [mm]	H _H [mm]	h _H [mm]	d _H [mm]	Weight [kg]
22.0	180M	736	512	307	413	303

Dimensions depend on the casing size (DN_s, DN_b, a1, h2, e1). See table of connections.
Weight: net-weight without packaging



Technical data of the standard version	
Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3×380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar
Certificates	 

* registered for recertification

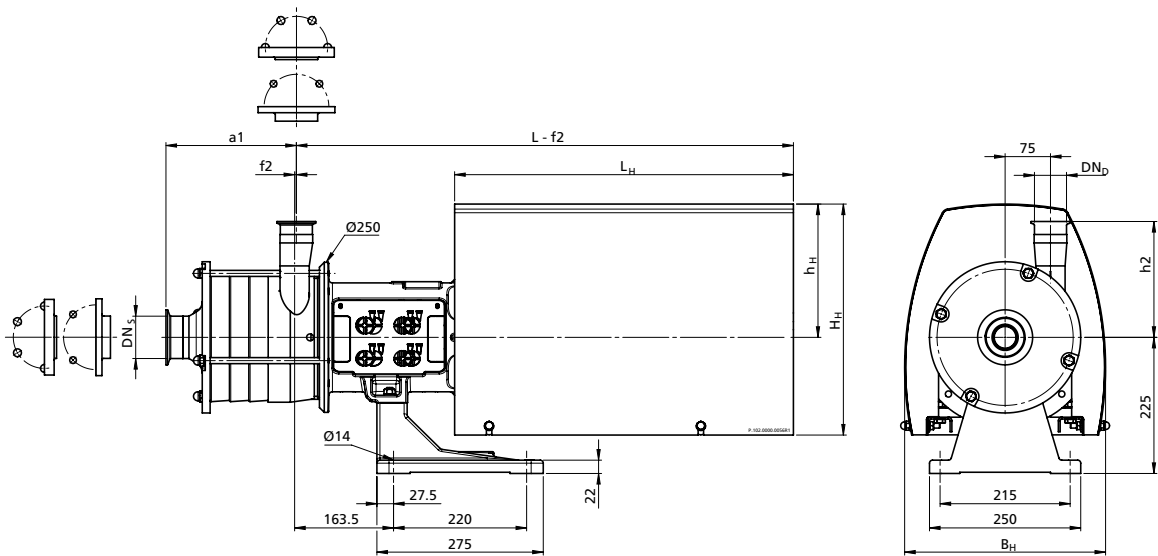

2-pole

P2 [kW]	IEC- size	L [mm]	L _H [mm]	B _H [mm]	H _H [mm]	h _H [mm]	Weight [kg]
4.0	112M	734.5	471	332	382	241	104
5.5	132S	825.0	561	332	382	220	131
7.5	132S	825.0	561	332	382	220	140

Dimensions depend on the casing size (DN_s, DN_D, a1, h2, e1). See table of connections.
Weight: net-weight without packaging




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3×380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar

Certificates



* registered for recertification

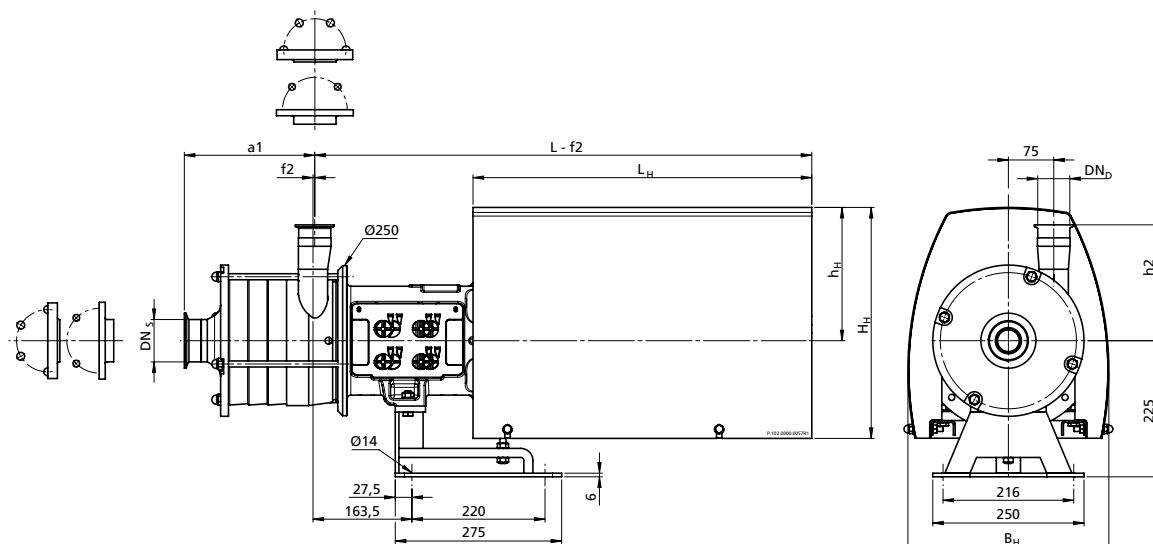

2-pole

P2 [kW]	IEC- size	L [mm]	L _H [mm]	B _H [mm]	H _H [mm]	h _H [mm]	Weight [kg]
4.0	112M	734.5	471	332	382	241	101
5.5	132S	825.0	561	332	382	220	127
7.5	132S	825.0	561	332	382	220	136

Dimensions depend on the casing size (DN_s, DN_p, a1, h2, e1). See table of connections.
Weight: net-weight without packaging




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3×380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar

Certificates



* registered for recertification

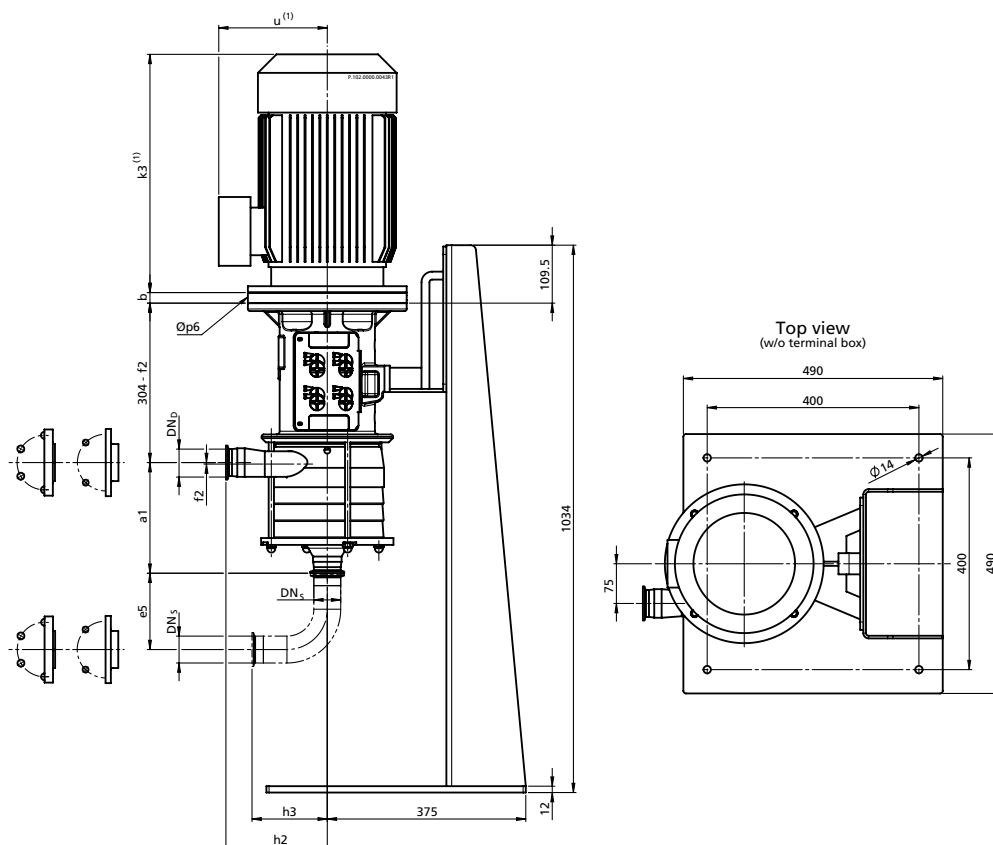


2-pole

				Standard		tronic		Weight [kg]
P2 [kW]	IEC- size	b [mm]	p ₆ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	
4.0	112M	0	250	380	185	334	201	135
5.5	132S	20	300	450	205	365	201	162
7.5	132S	20	300	450	205	389	237	171
11.0	160M	51	350	570	260	406	237	198
15.0	160M	51	350	570	260	471	308	206
18.5	160L	51	350	580	260	515	308	227
22	160L			On request				


Dimensions depend on the casing size (DN_s, DN_p, a1, h2, h3, e1, e5). See table of connections.

⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.


Weight: net-weight without packaging

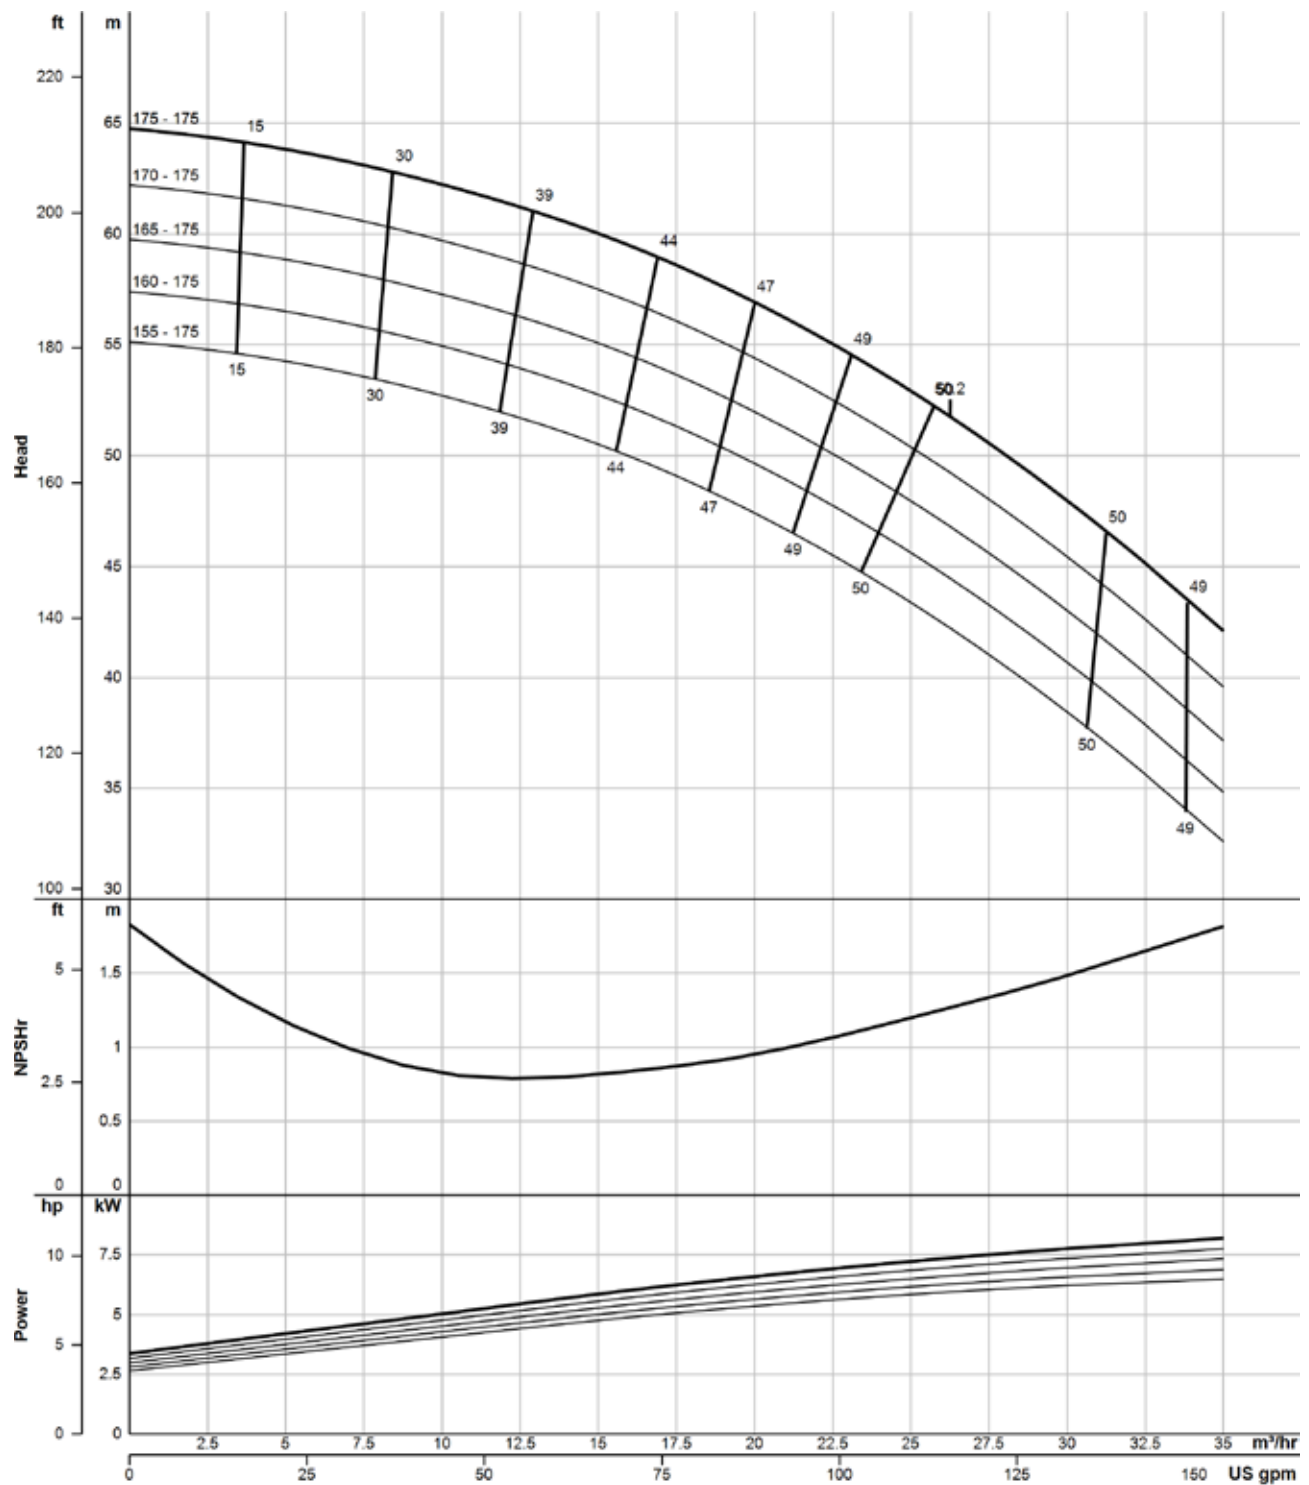


The flow charts are based on water, temperature 20 °C

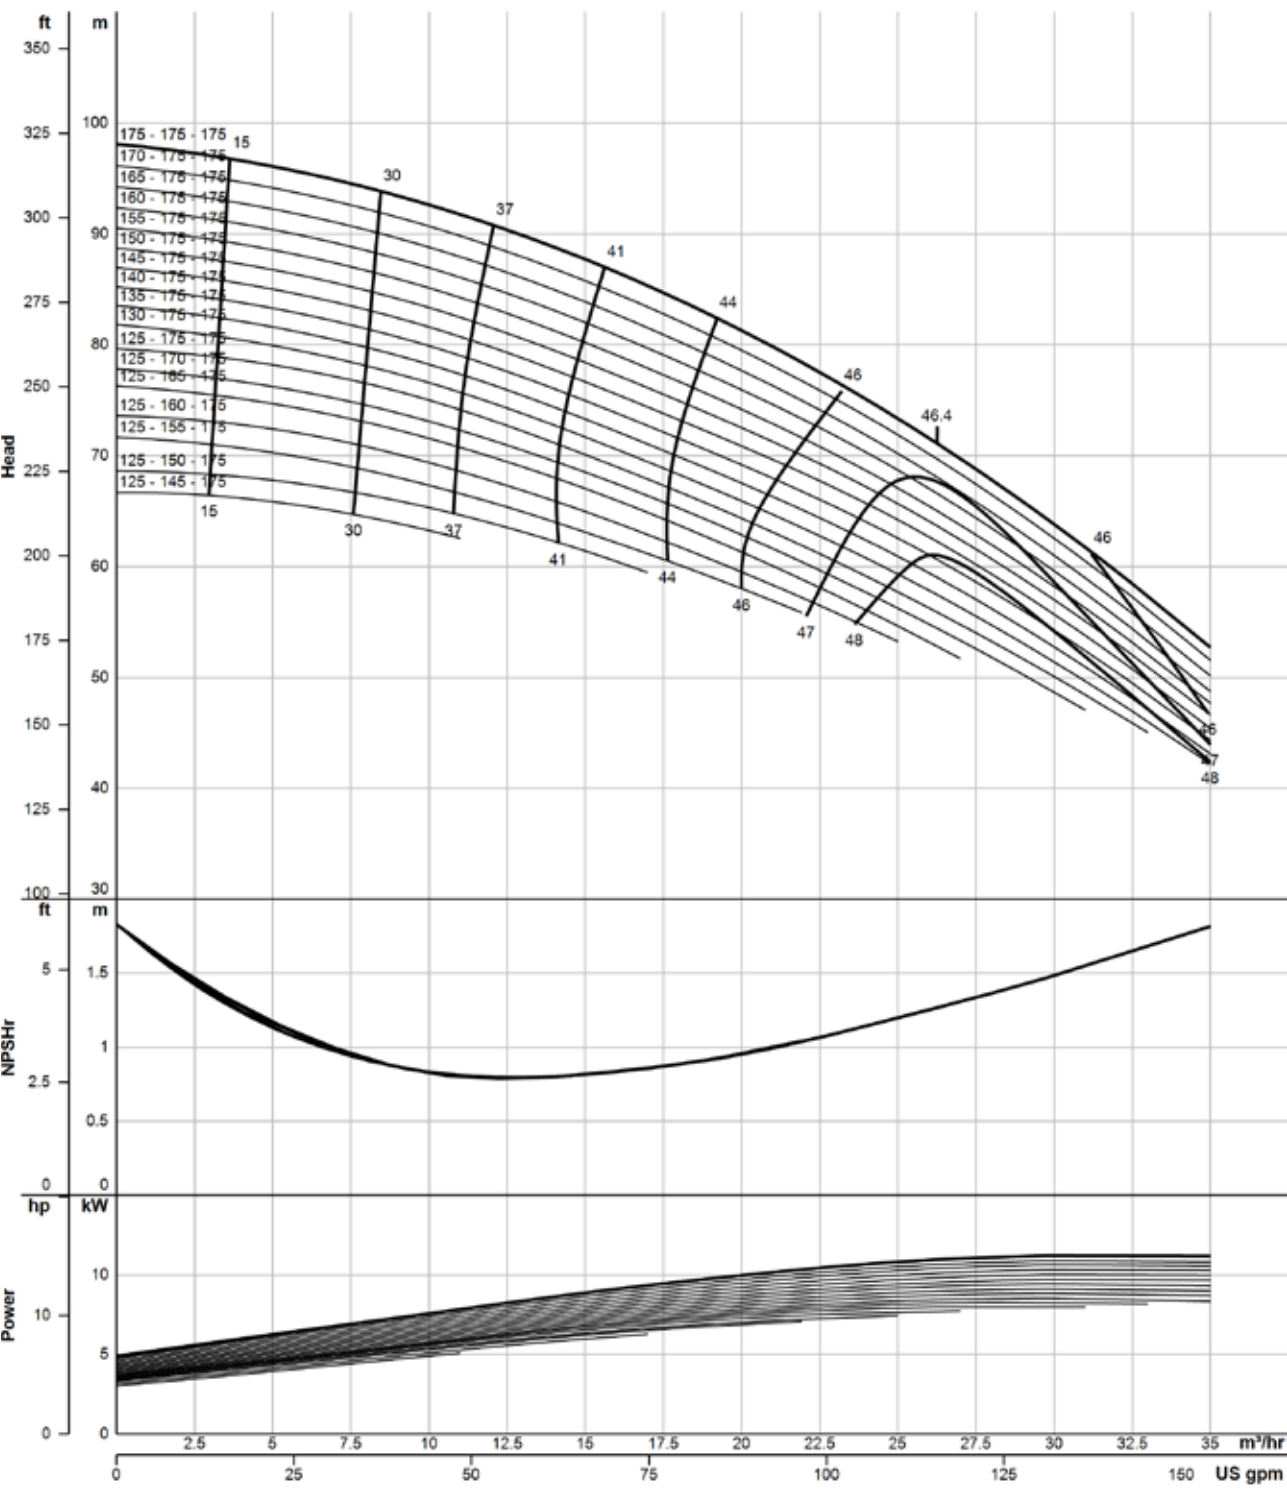


The flow charts are based on water, temperature 20 °C

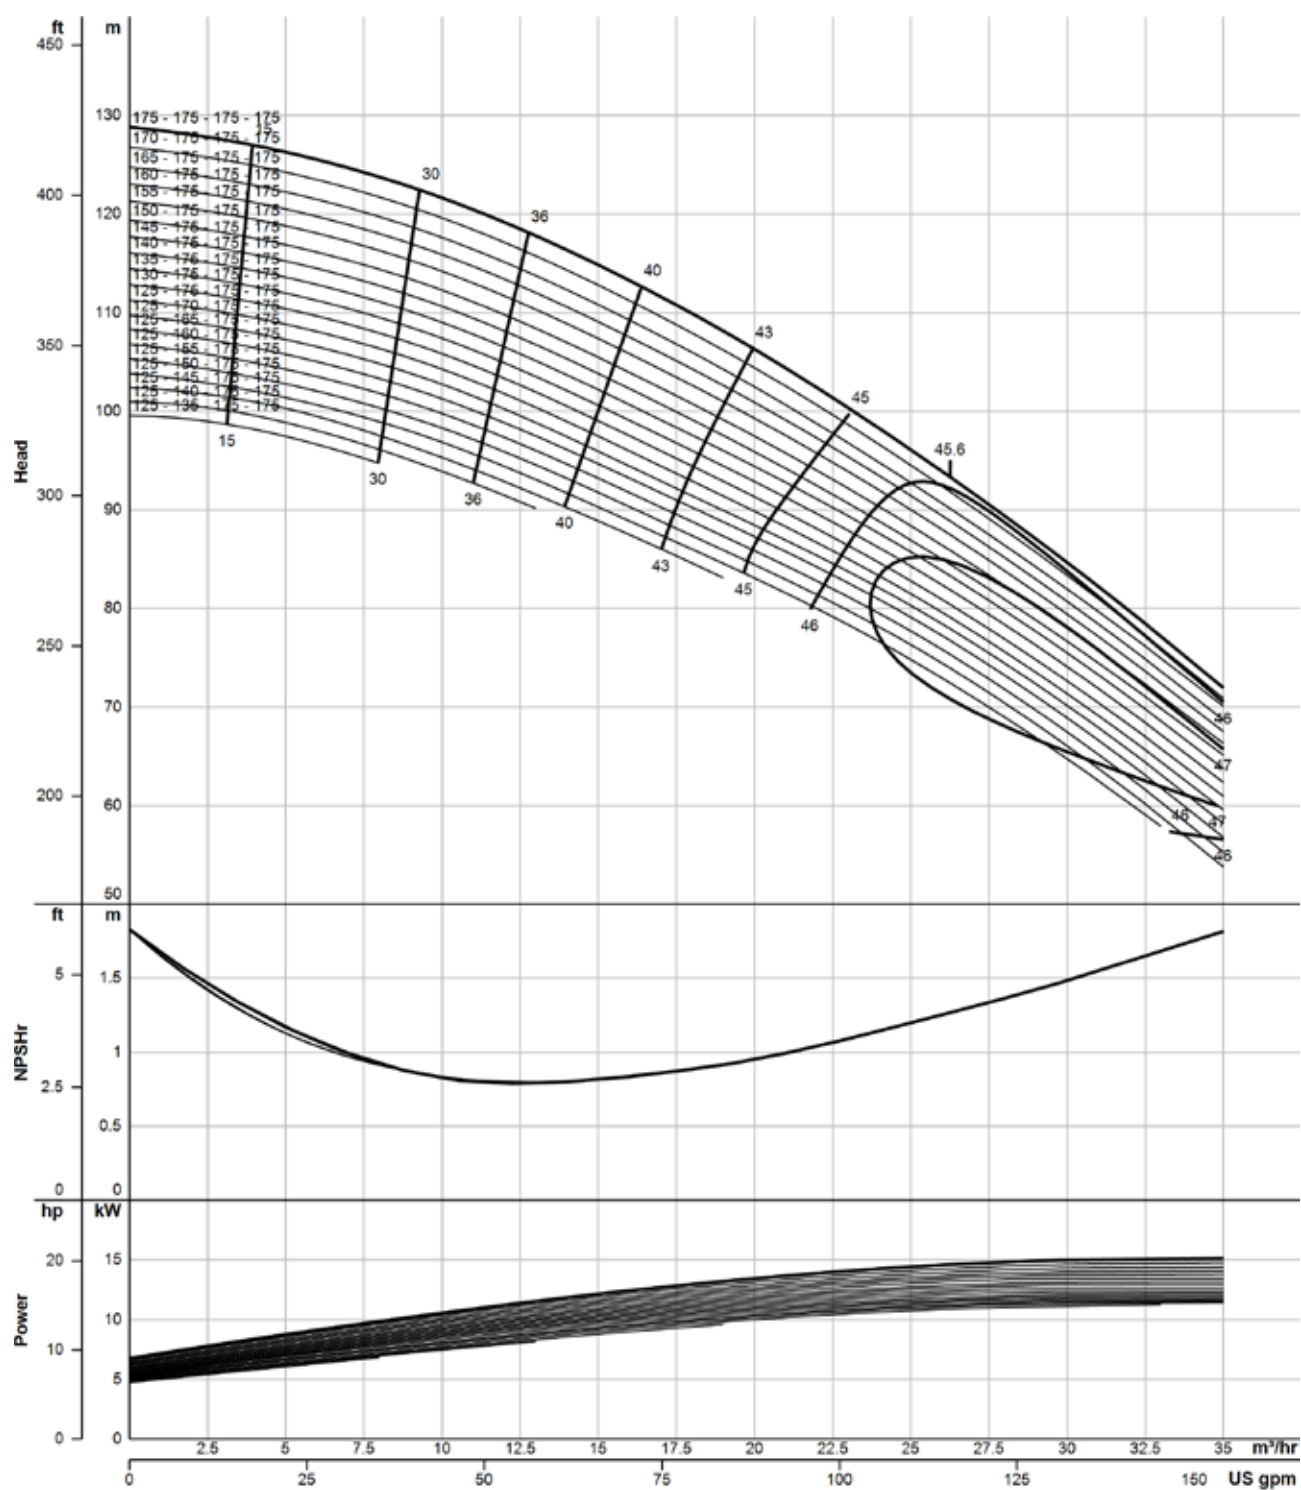


The flow charts are based on water, temperature 20 °C

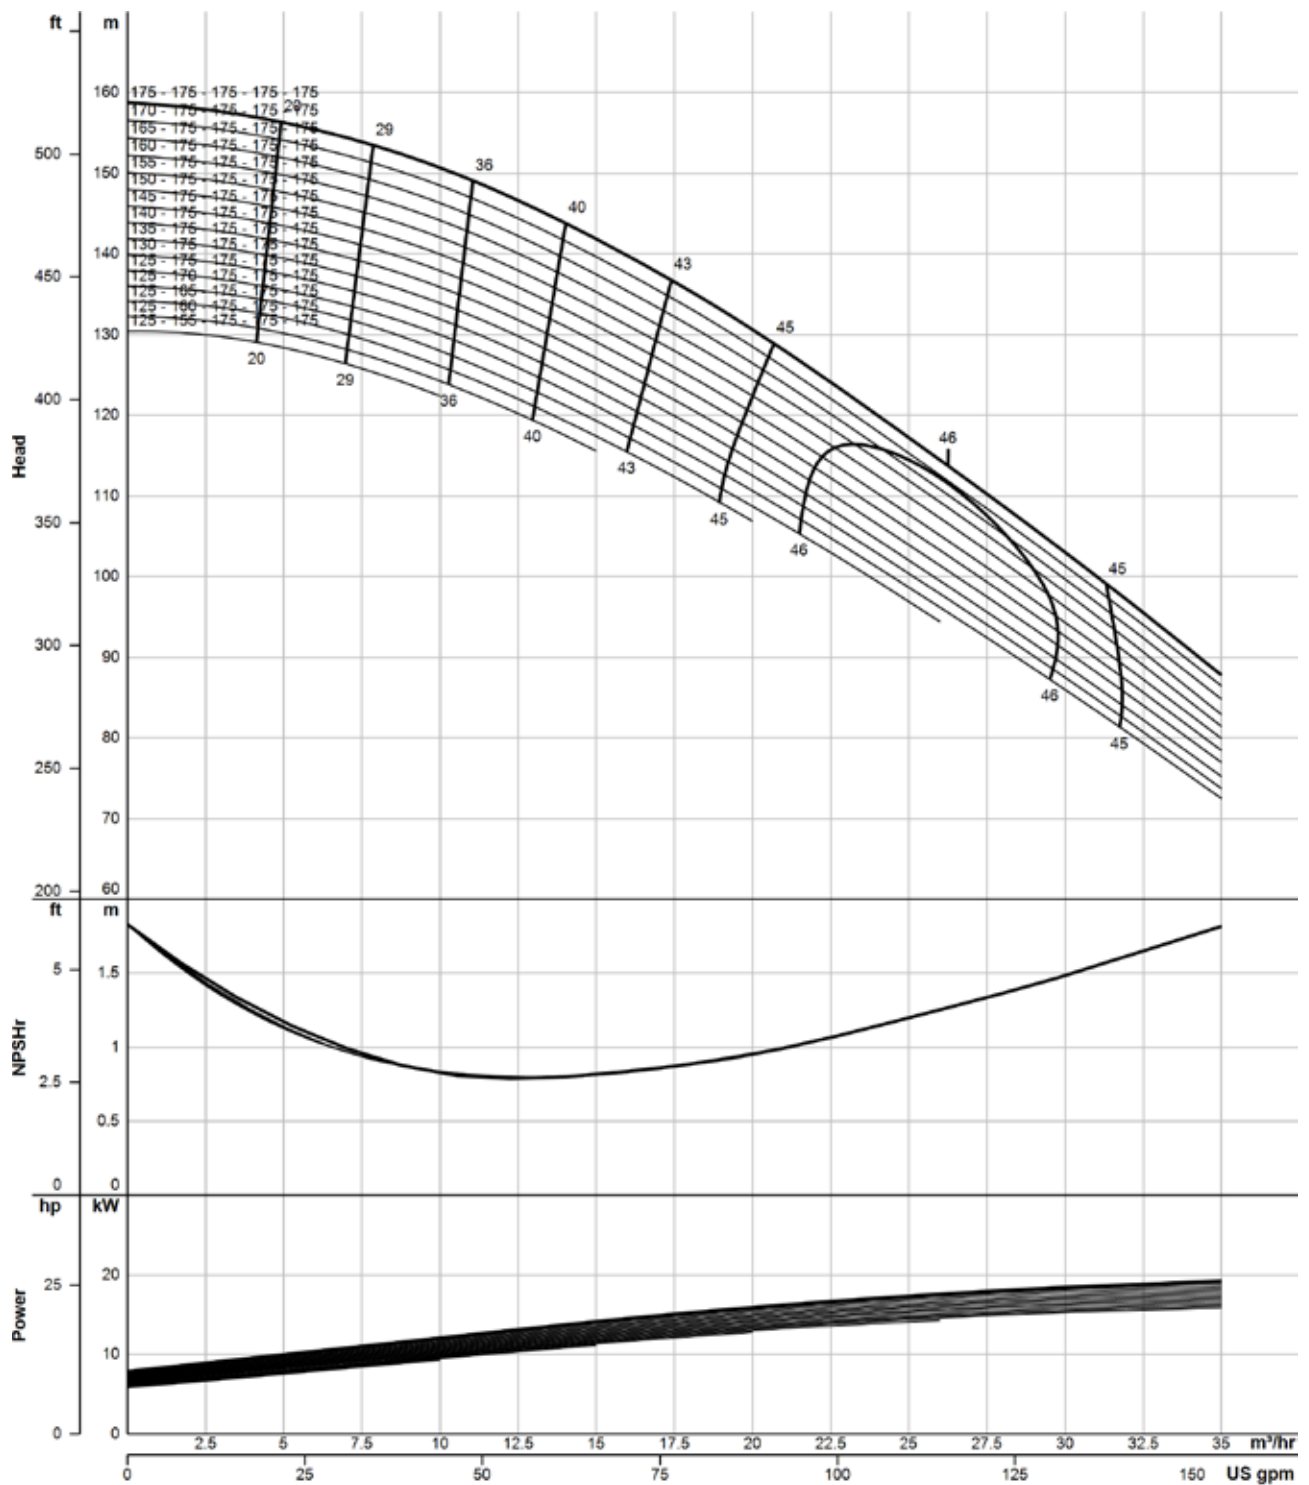


The flow charts are based on water, temperature 20 °C

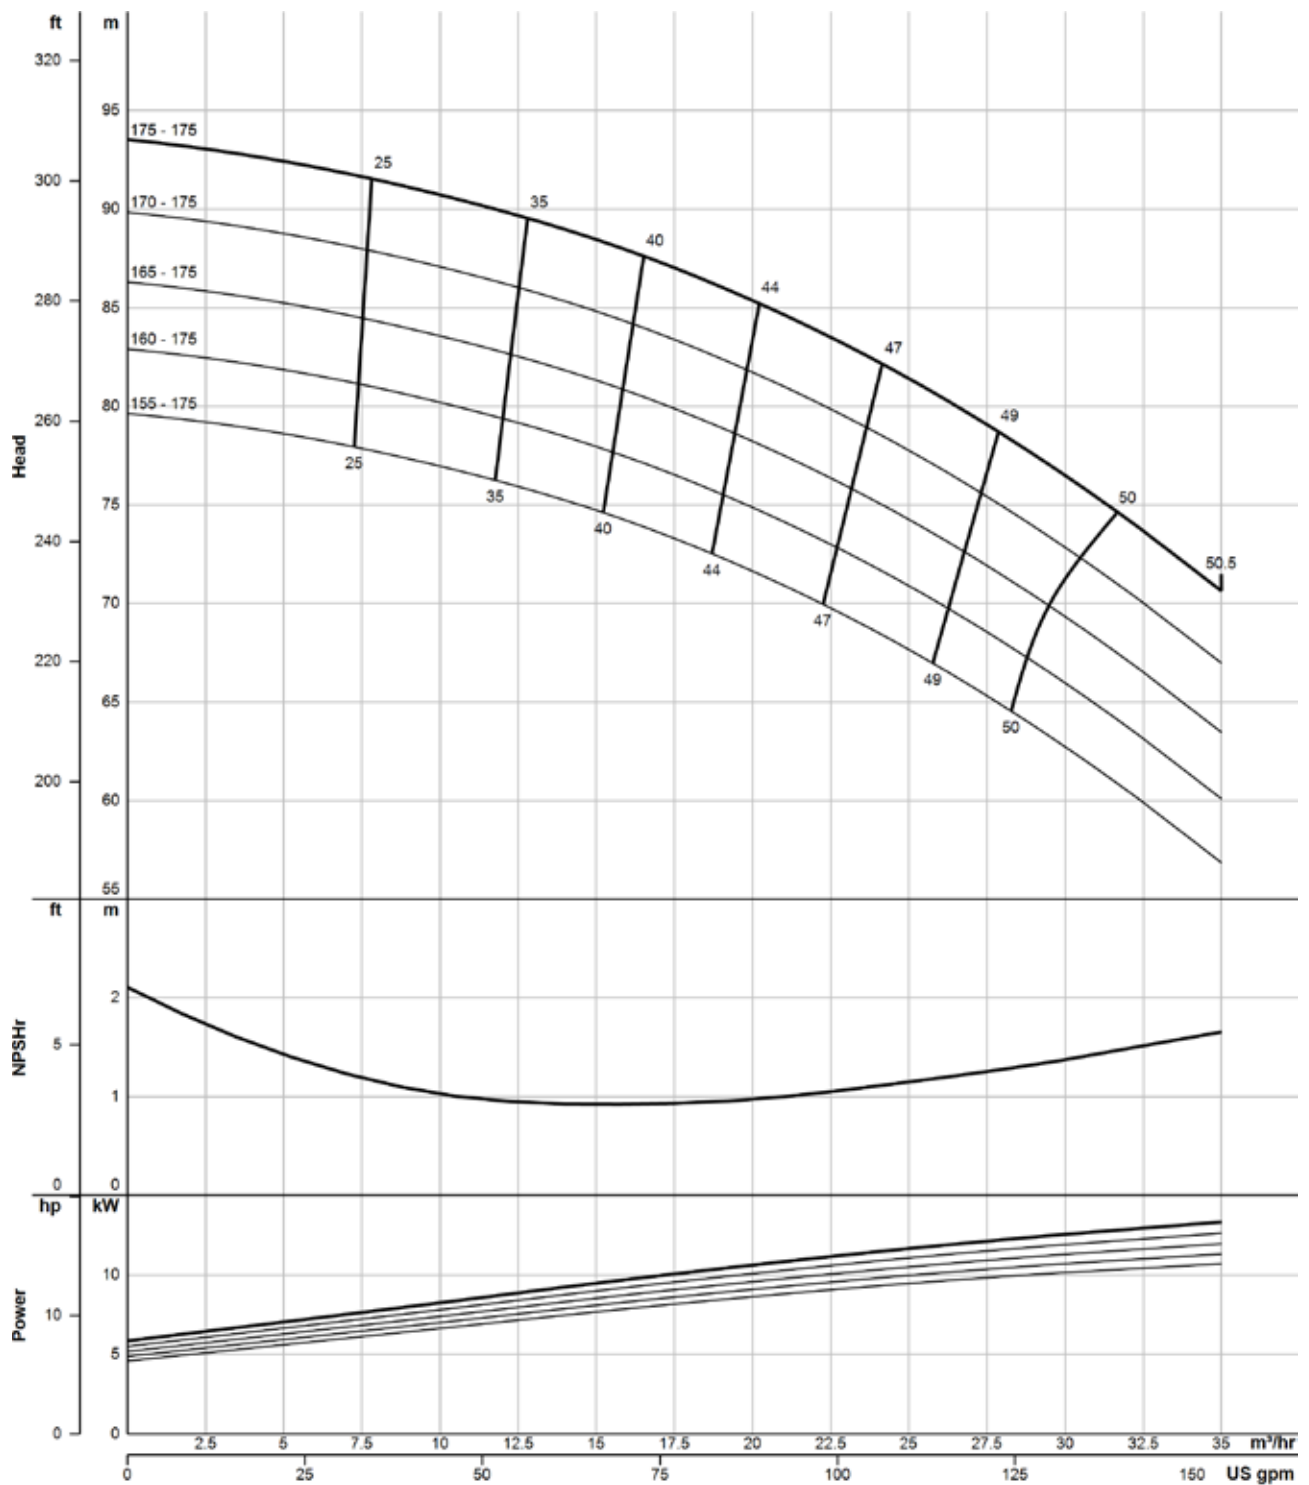


The flow charts are based on water, temperature 20 °C

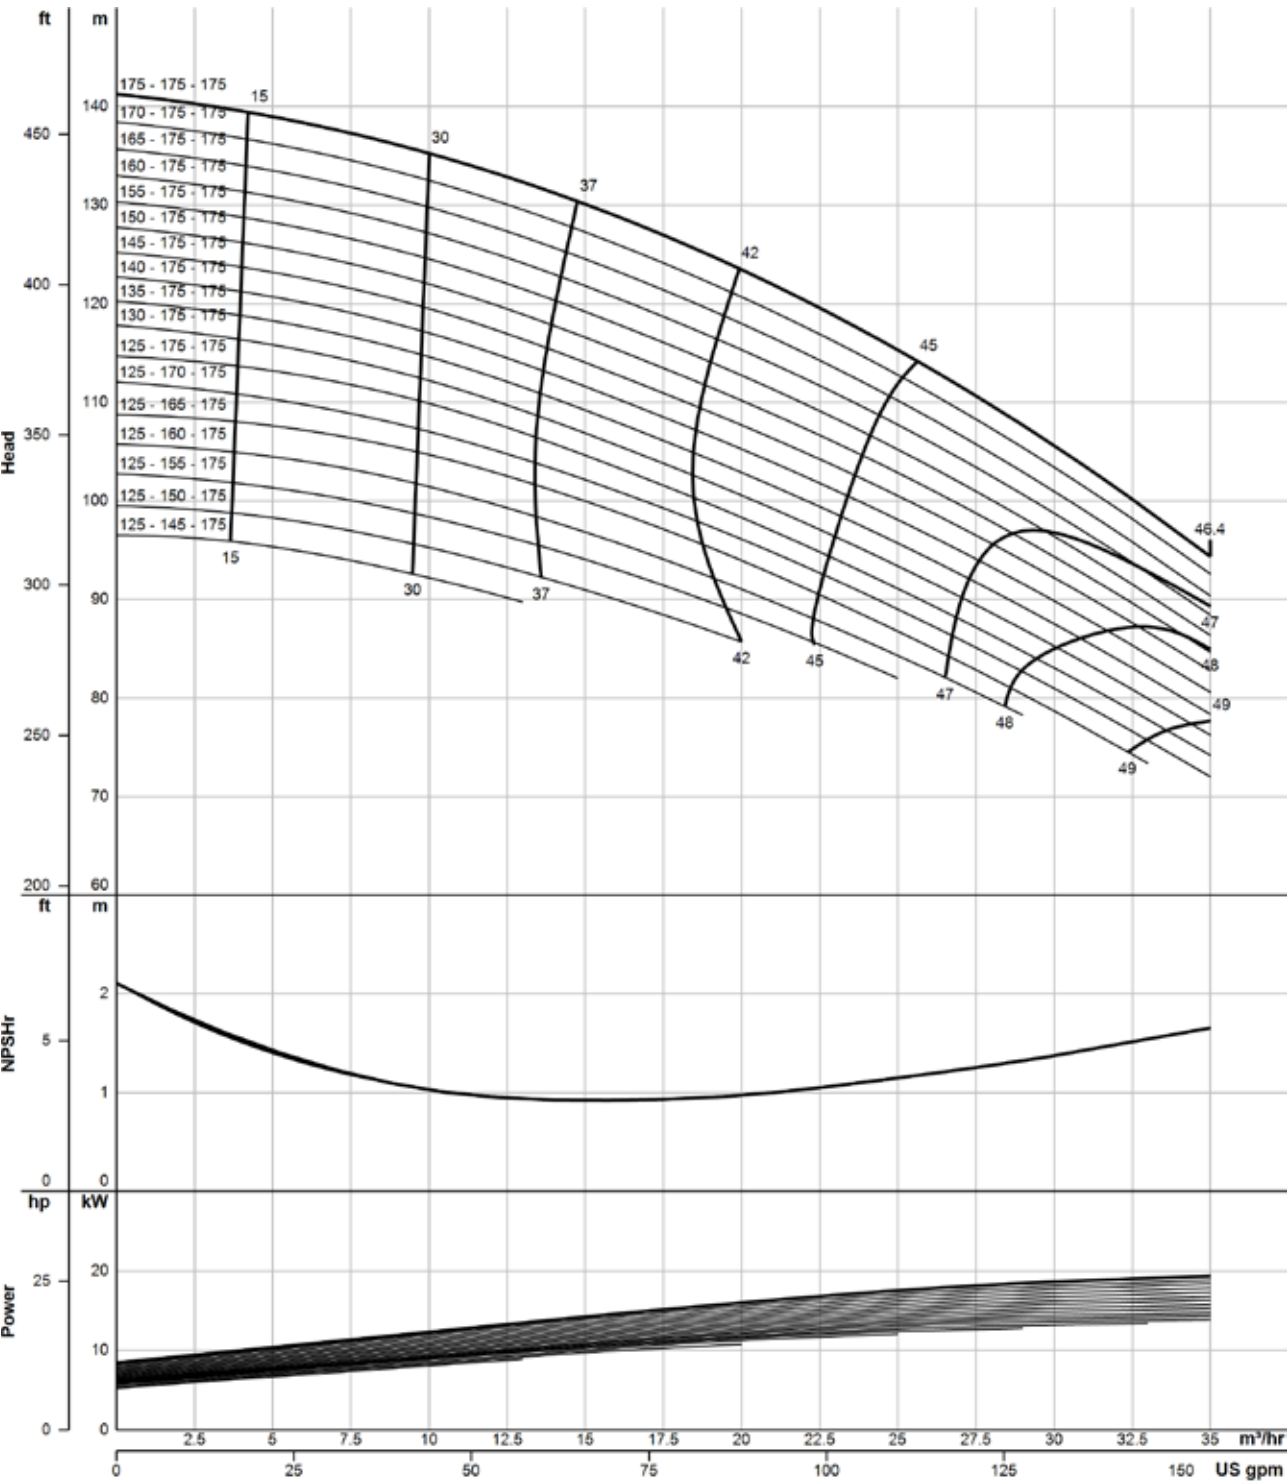

The flow charts are based on water, temperature 20 °C

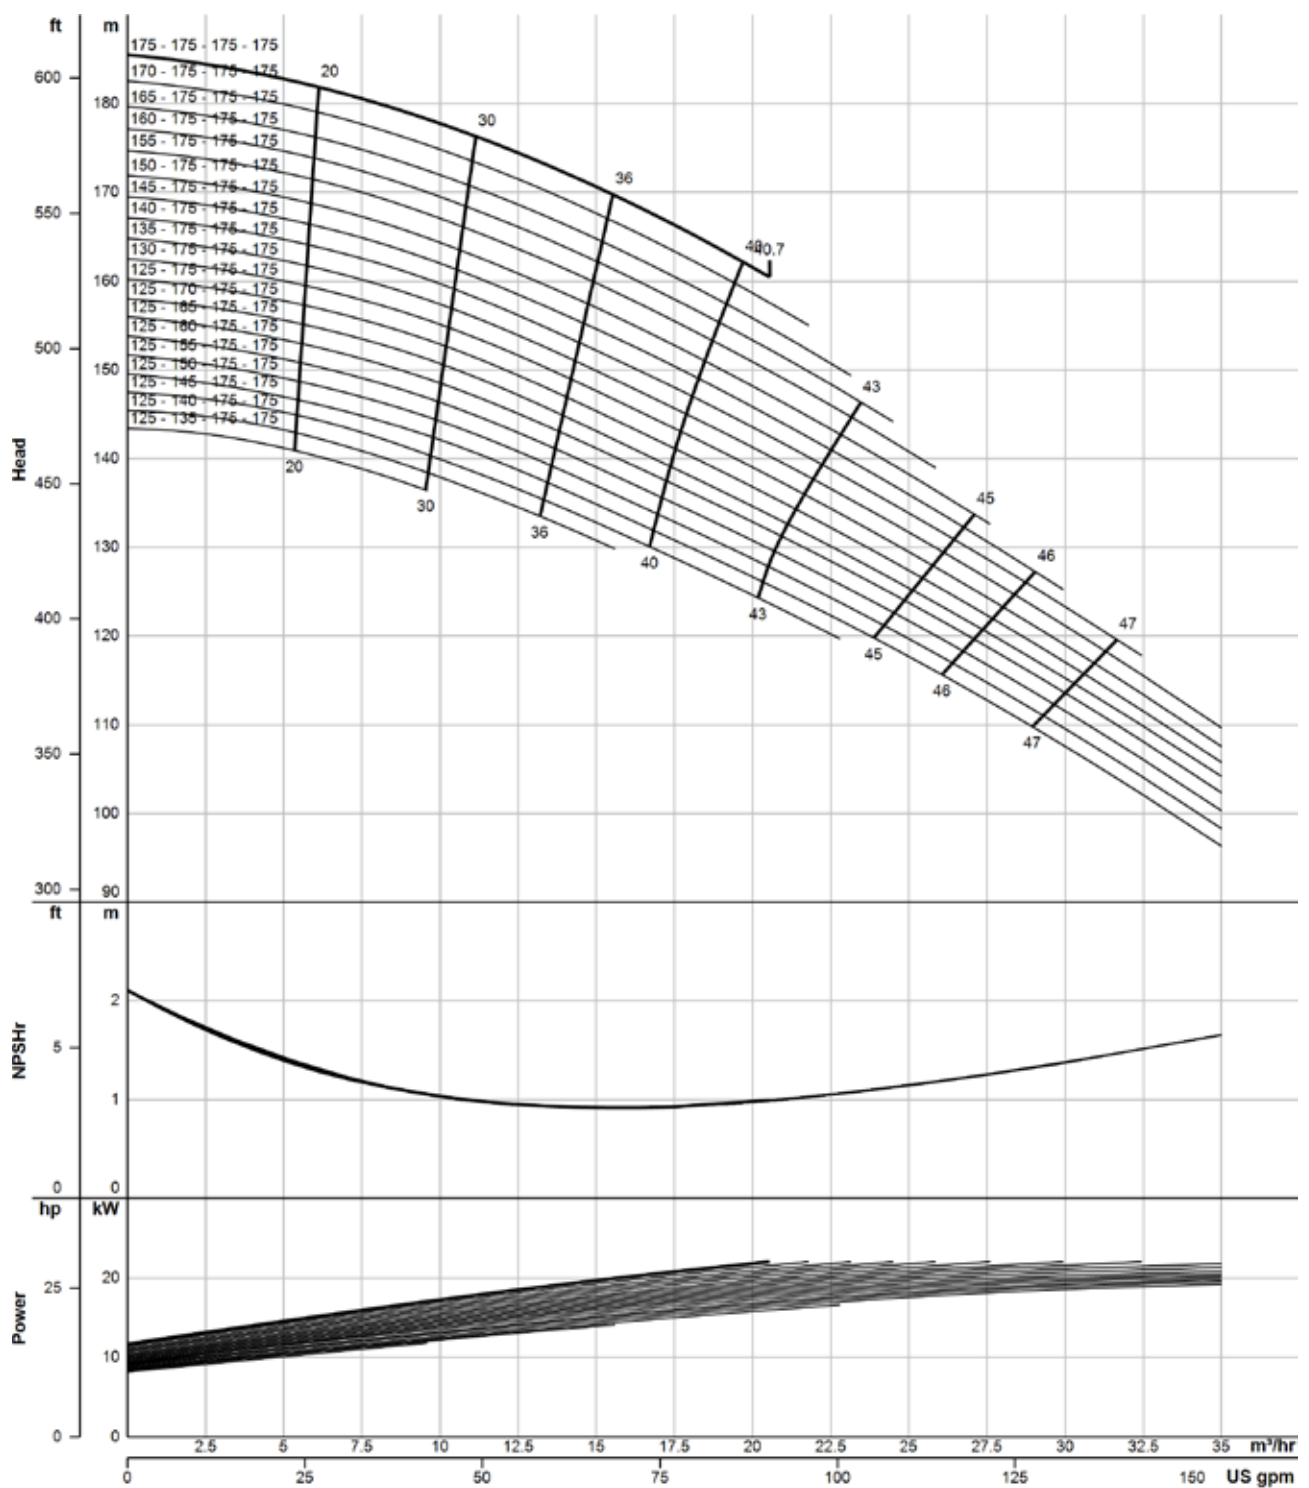

The flow charts are based on water, temperature 20 °C

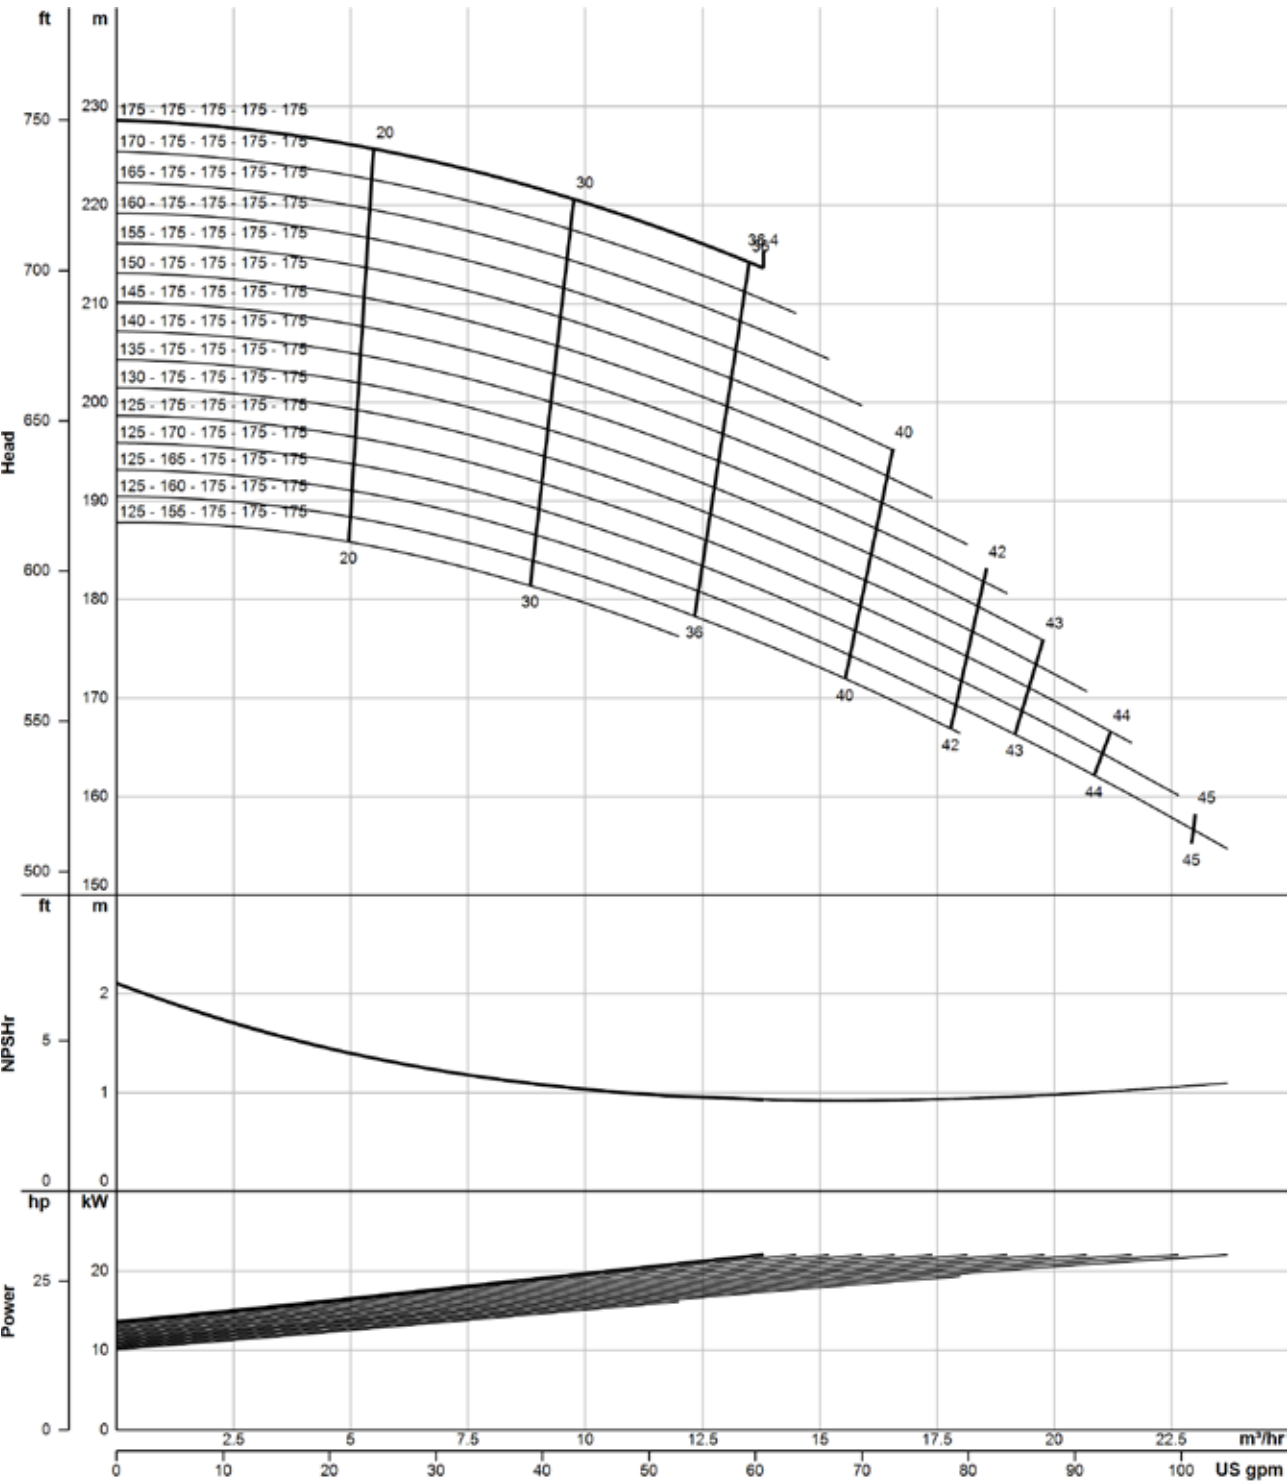

The flow charts are based on water, temperature 20 °C

GEA Hilge CONTRA III

GEA Hilge CONTRA III Adapta-V




Technical data of the standard version

Materials	Pump housing: stainless steel 316L (1.4404/1.4435) Impeller: precision casting 316L (1.4404)
Connections	Thread DIN 11851
Nominal width of connections	Suction side DN 50–80, pressure side DN 40–65
Mechanical seal	Single mechanical seal, material carbon/stainless steel/EPDM (FDA, USP Class VI)
Static seals	EPDM (FDA, USP Class VI)
Motor	Standard motor: IEC-Motor, 3 × 380/400/415 V/50 Hz, IP 55, ISO-Class F, incl. PTC thermistor, IE3
Documentation	Operating instructions, declaration of conformity, pump test report
Flow rate 50 Hz	Max. 40 m³/h
Flow rate 60 Hz	Max. 35 m³/h
Pump head 50 Hz	Max. 160 m
Pump head 60 Hz	Max. 230 m
Housing pressure	25 bar

Certificates



* registered for recertification

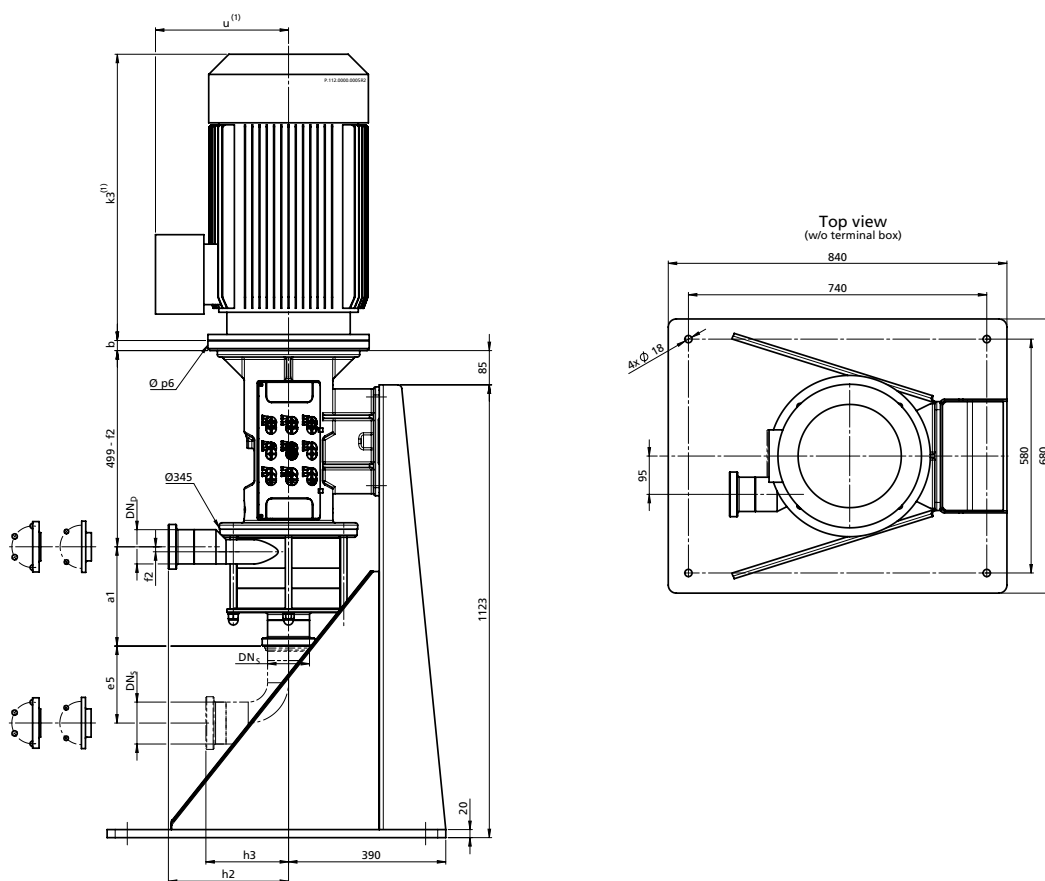


2-pole

				Standard		tronic		Weight [kg]
P2 [kW]	IEC- size	b [mm]	p _e [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	k ₃ ⁽¹⁾ [mm]	u ⁽¹⁾ [mm]	
22	180M	0	350	620	290	541	308	397.5
30	200L	24	400	710	330	–	–	462.3
37	200L	24	400	710	330	–	–	479.6
45	225M	30	450	890	390	–	–	578.0


Dimensions depend on the casing size (DN_s, DN_p, a1, h2, e1). See table of connections.

⁽¹⁾ Motor dimensions depend on the motor manufacturer and execution. The shown motor dimensions indicate the size for the standard motor.


Weight: net-weight without packaging

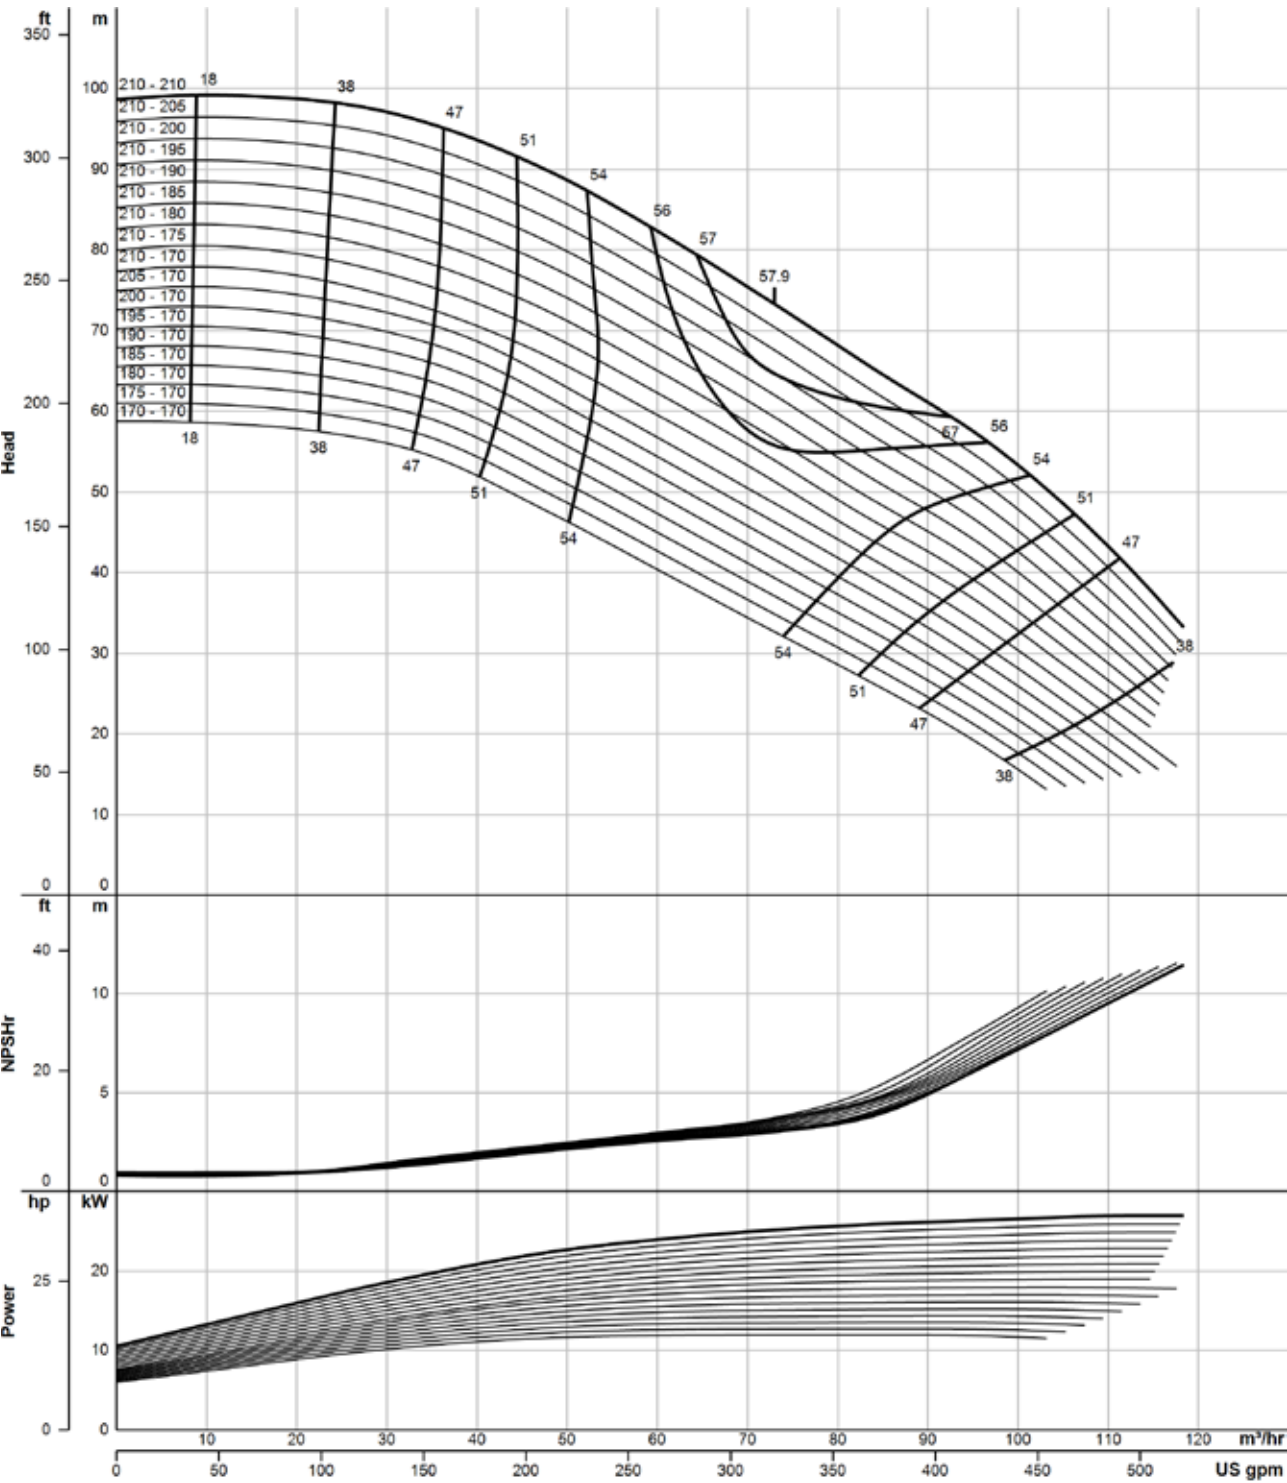


The flow charts are based on water, temperature 20 °C

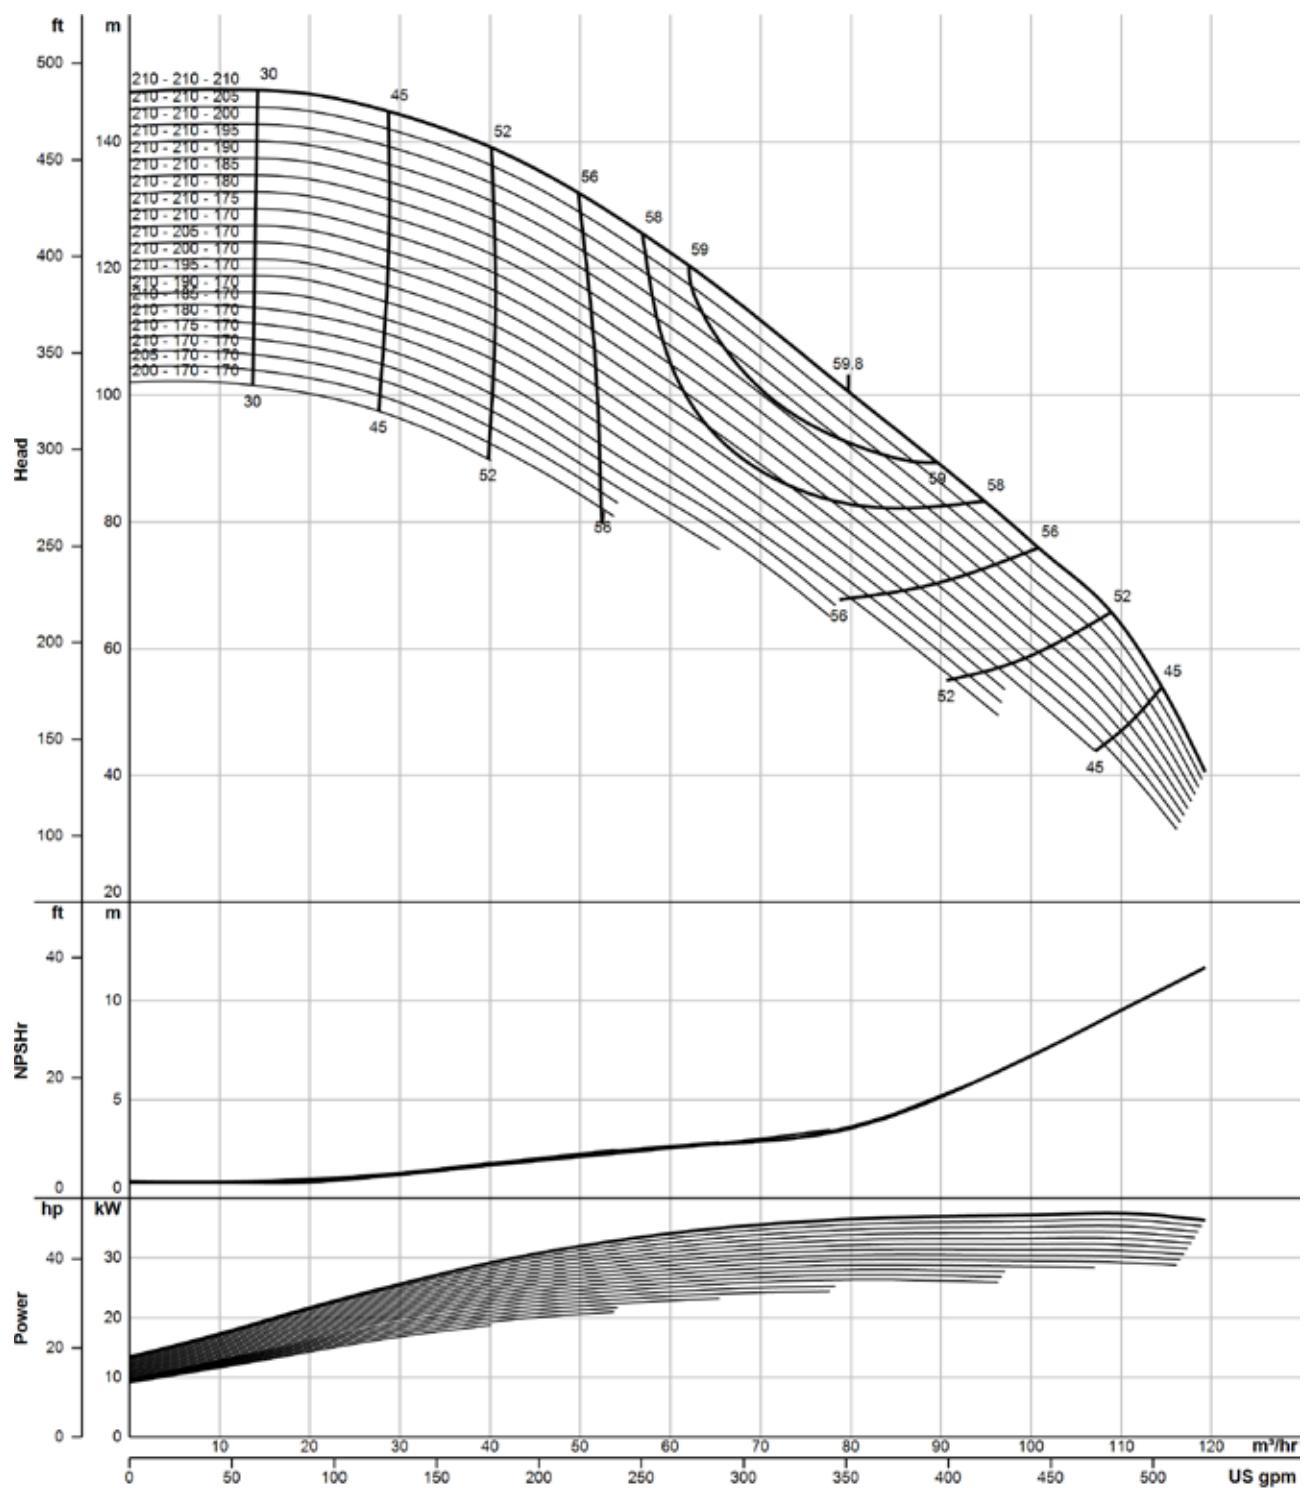


The flow charts are based on water, temperature 20 °C

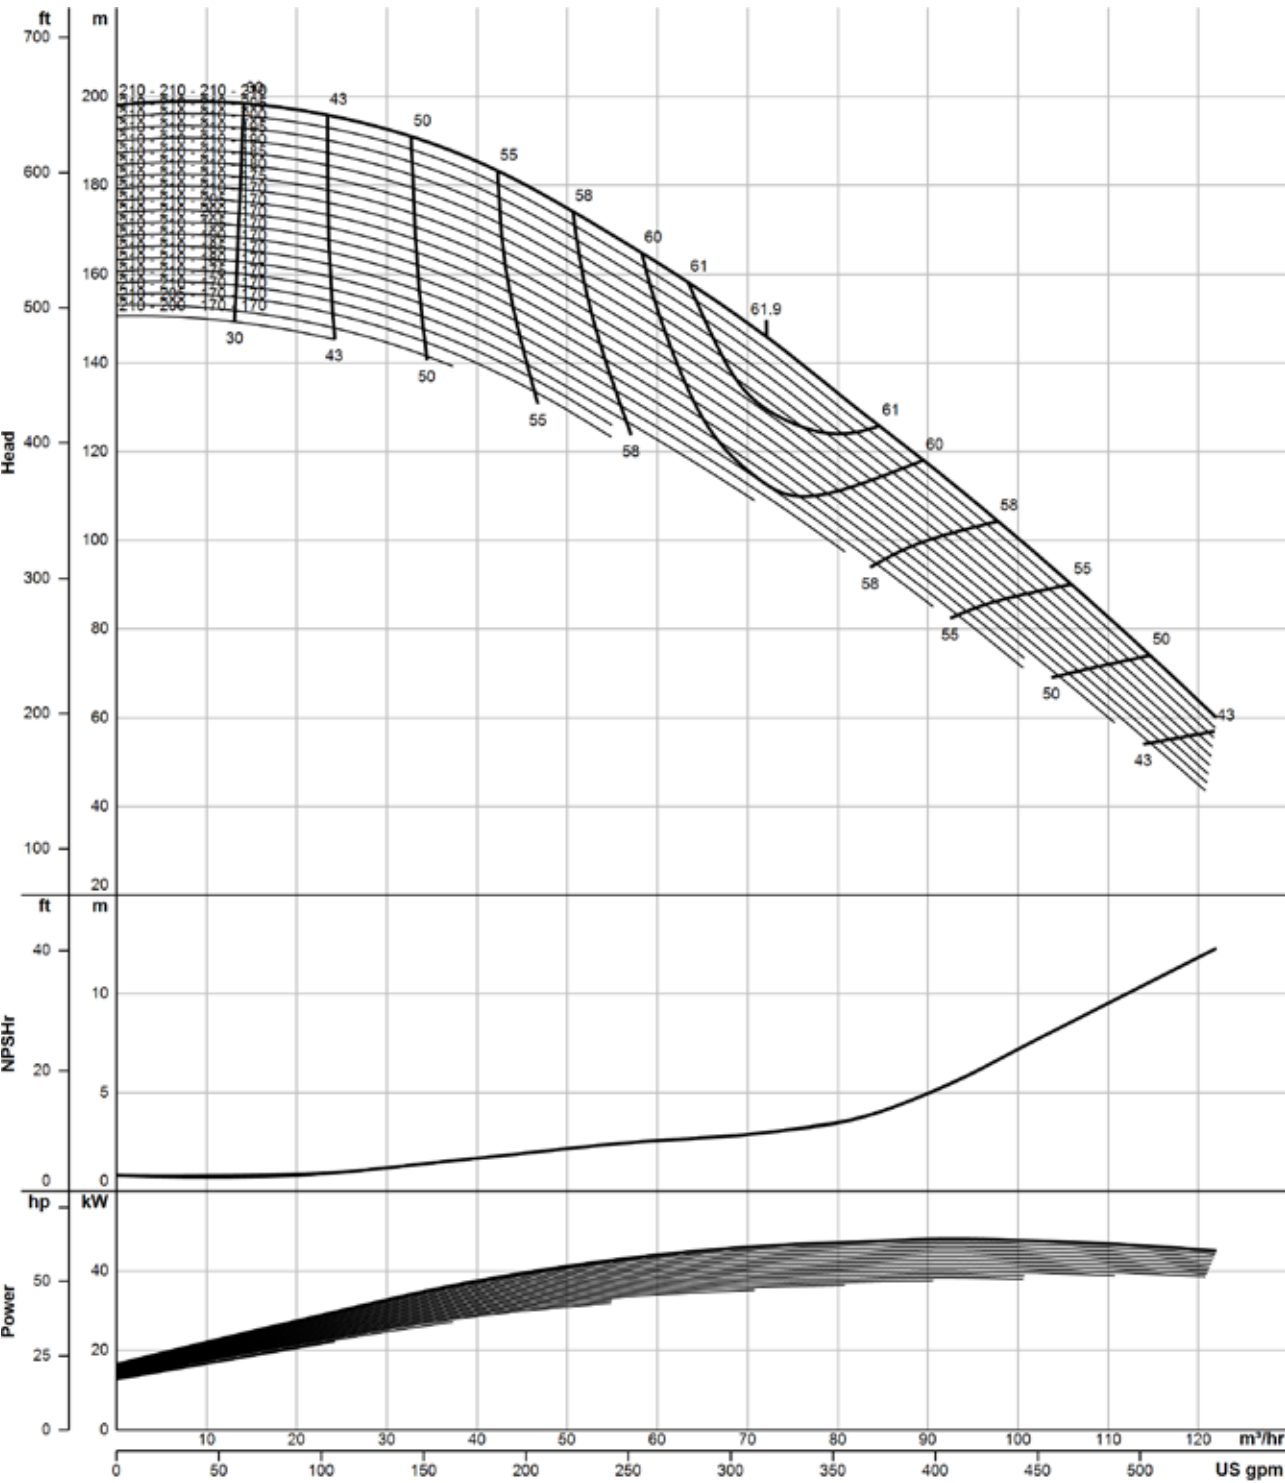

The flow charts are based on water, temperature 20 °C

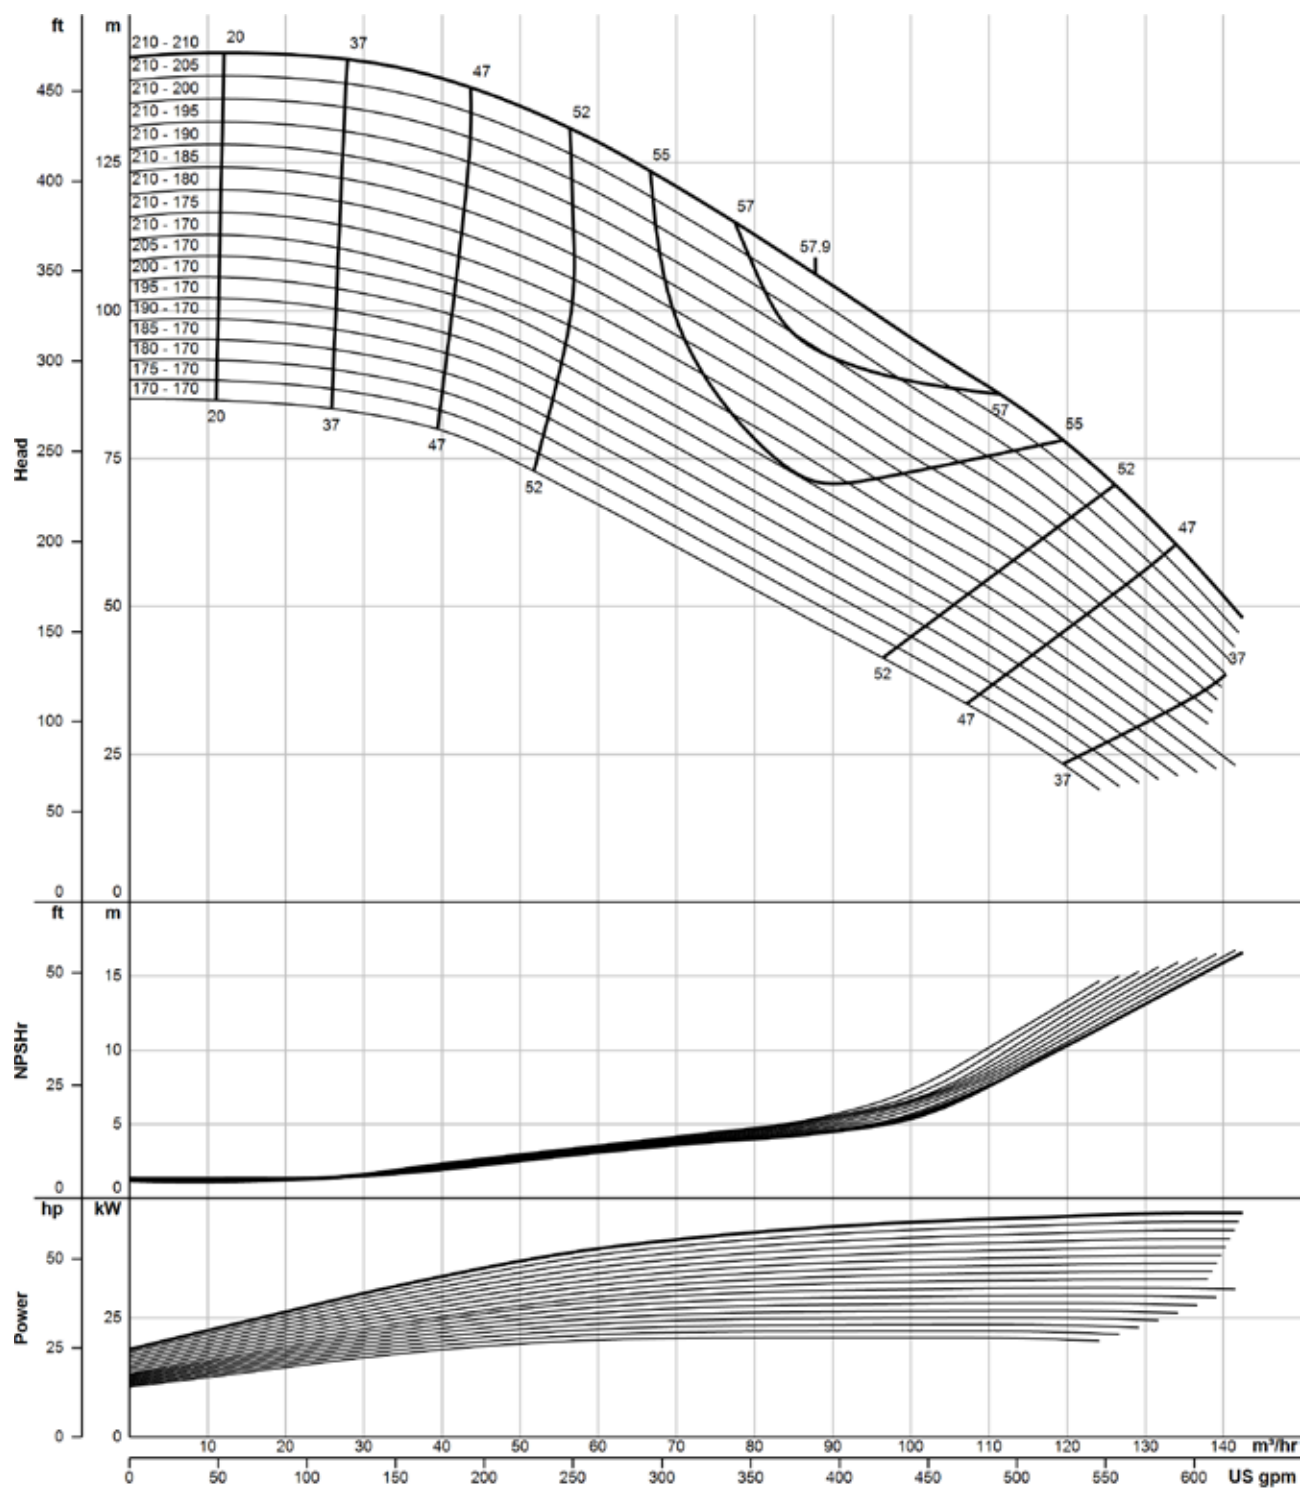

The flow charts are based on water, temperature 20 °C

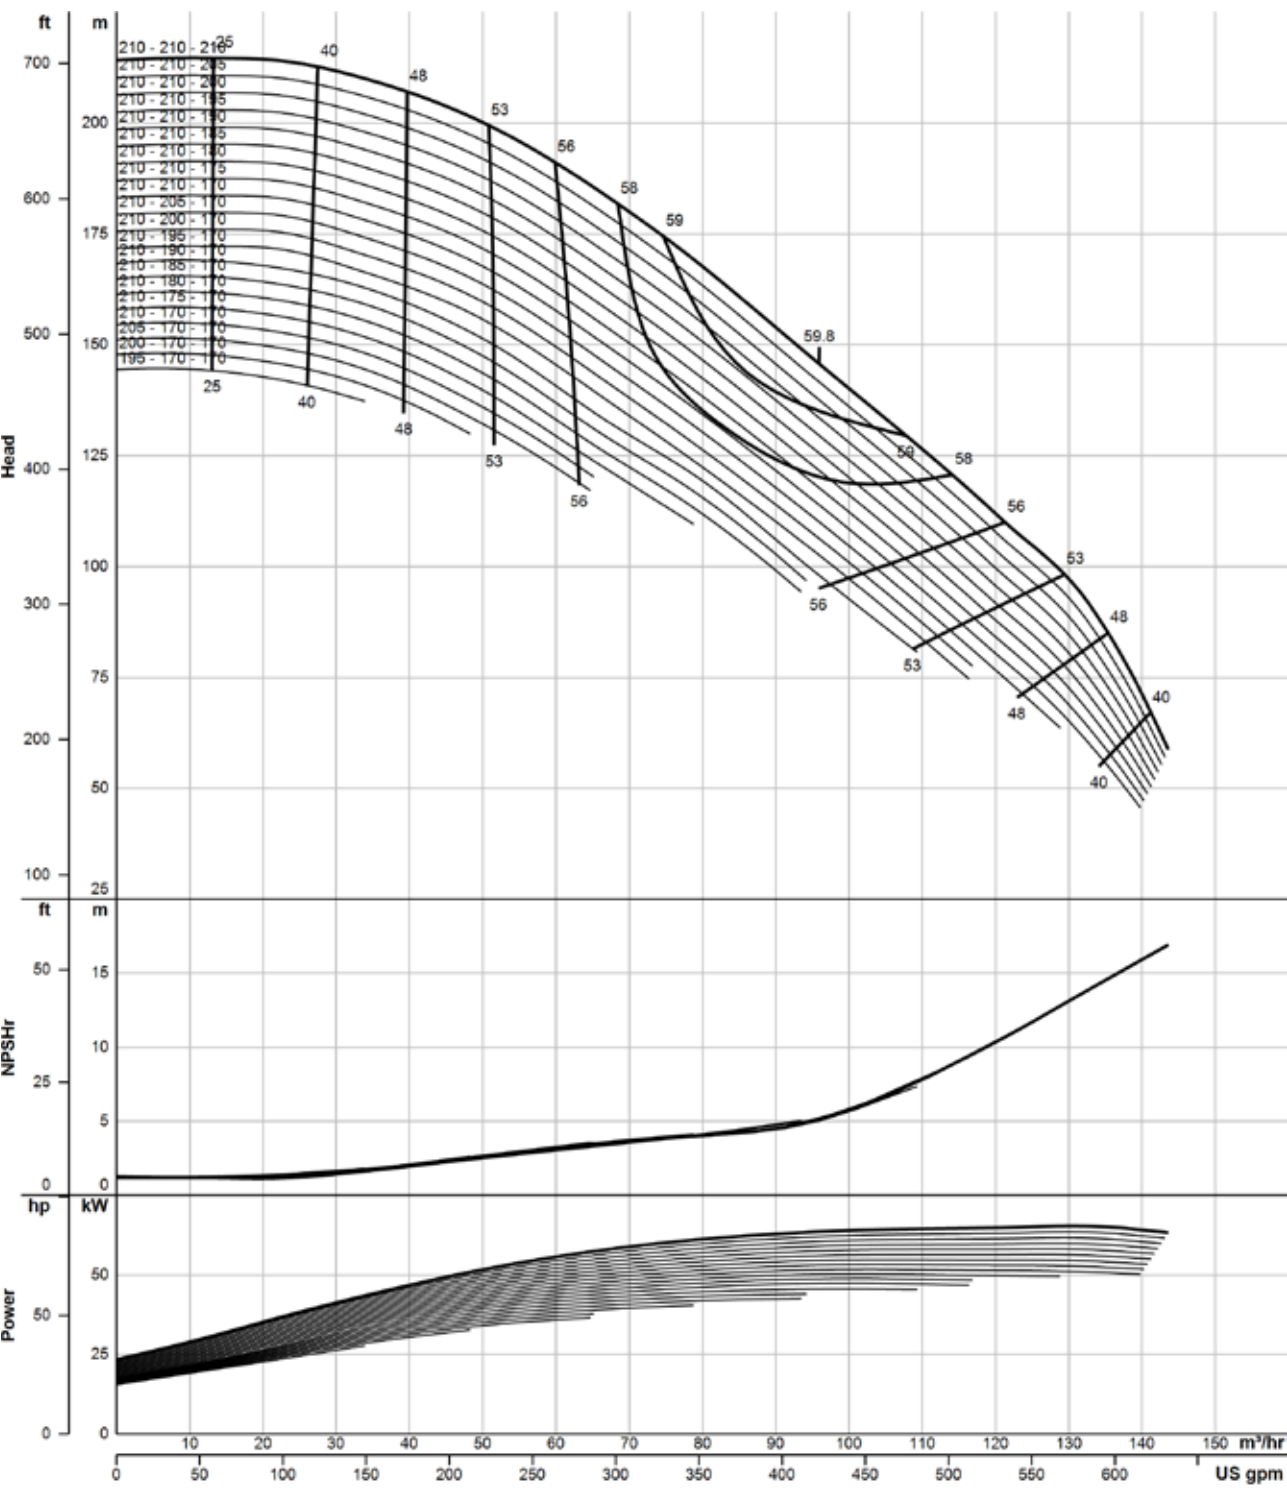

The flow charts are based on water, temperature 20 °C

INQUIRY SHEET · CENTRIFUGAL PUMPS 1/2



GEA Hygienic Pumps

Contact Data

Company: _____

Contact Person: _____ E-mail: _____

Phone: _____ Country: _____

Preferred Range

☐ VARIPUMP ☐ SMARTPUMP ☐ No requirement

Liquid Data

*Liquid: _____ Solids: ☐ No ☐ Yes:

*Liquid temperature [°C/°F]: _____ Kind of solids: _____

*Density [kg/dm³]: _____ Size of solids [mm]: _____

*Viscosity [mPas]: _____ Abrasive: ☐ No ☐ Yes

Concentration [%]: _____

Operating Conditions

*Duty point 1 *Flow [m³/h/gpm]: _____ *Head [m lc]: _____

Duty point 2 Flow [m³/h/gpm]: _____ Head [m lc]: _____

☐ End-suction pump: ☐ Self-priming pump:

Inlet pressure (NPSHa) [m]: _____ Suction head [m]: _____

Vacuum at inlet: ☐ No ☐ Yes: Gas content: ☐ No ☐ < 5 % ☐ > 5 %

Vacuum, abs. [mbar]: _____

System pressure [bar]: _____

Cleaning / Sterilization

CIP: ☐ No ☐ Yes: SIP: ☐ No ☐ Yes:

CIP Temperature [°C/°F]: _____ SIP Temperature [°C/°F]: _____

CIP Flow [m³/h/gpm]: _____ SIP Duration [min]: _____

CIP Head [m Fls]: _____

Pump execution

*Connection Type

☐ Tri Clamp (DIN 32676) ☐ ANSI Flange ☐ DIN 11851

☐ DIN 11853-2/11864-2 ☐ Other: _____

Connection Size

DN_i/DN_o: _____

Other: _____

Drainable:

☐ No ☐ Yes

Execution and Design

☐ Pump in Bloc version with motor ☐ Combi foot ☐ Motor foot

☐ Pump in long coupled version with base plate and standard motor ☐ On Trolley ☐ Horizontal

☐ With stainless steel motor shroud ☐ Cast iron foot ☐ Vertical

☐ 3-A stainless steel adjustable feet ☐ Stainless steel foot ☐ Vertical with stainless steel stand

INQUIRY SHEET · CENTRIFUGAL PUMPS 2/2



GEA Hygienic Pumps

Surface Roughness

- ☐ Not specified
- ☐ $R_a \leq 3.2 \mu\text{m}$
- ☐ $R_a \leq 0.8 \mu\text{m}$
- ☐ $R_a \leq 0.4 \mu\text{m}$

Ferrite Content

- ☐ Not specified
- ☐ $\text{Fe} < 1\%$

Shaft Seal

- ☐ Single mechanical seal
- ☐ Flushed mechanical seal

Material Shaft Seal

- ☐ Carbon/Stainless Steel
- ☐ SiC/SiC
- ☐ Carbon/SiC
- ☐ other: _____

Elastomer

- ☐ EPDM
- ☐ FKM (Viton)
- ☐ other: _____

Motor Data

Power supply:

- ☐ 3~ 400V/50 Hz
- ☐ 3~ 200V/50 Hz
- ☐ other: _____
- ☐ 3~ 460V/60 Hz
- ☐ 3~ 200V/60 Hz
- ☐ 3~ 380V/60 Hz

Motor speed [1/min]: _____

PTC-Thermistors: ☐ No ☐ Yes2 wire-Thermistors: ☐ No ☐ YesVariable speed drive ☐ No ☐ Yes:

- ☐ External frequency converter (not on motor)
- ☐ Integrated frequency converter (on motor)

Explosion protection ☐ No ☐ YesATEX ☐ No ☐ Yes:

Ex-Zone: _____

Temperature class: _____

Ambient temperature [°C/°F]: _____

EXP Motor

☐ No ☐ Yes:

Temperature class: _____

Ambient Temperature [°C/°F]: _____

Class: _____

Division: _____

Group: _____

Certificates/Documentation

- ☐ 3-A Sanitary Standard certification
- ☐ Inspection certificate 3.1 acc. to DIN EN 10204
- ☐ Test report 2.2 acc. to DIN EN 10204
- ☐ EHEDG certification
- ☐ Further certificates and documentation: _____
- ☐ FDA declaration of conformity
- ☐ Surface roughness test report
- ☐ Delta ferrite test report

Further Information

* Fields marked with an asterisk are mandatory for a pump selection

V1.0-2018

2.1		Works certificate according to DIN EN 10204: Declaration of the compliance with the order. This certificate is issued by the manufacturer.
2.2		Test report according to DIN EN 10204: Declaration of the compliance with the order under specification of the results of non-specific tests. This certificate is issued by the manufacturer.
3.1		Inspection certificate 3.1 according to DIN EN 10204: Declaration of the compliance with the order under specification of the results of specific tests. This certificate is issued by an authority which is independent of manufacturing and is validated by the manufacturers authorized inspection representative.
3-A		3-A Sanitary Standards, Inc. (3-A SSI) is an independent, non-profit corporation dedicated to advancing hygienic equipment design for the food, beverage, and pharmaceutical industries.
AS-i		Actuator Sensor interface. BUS system for the lowest field level.
ASME-BPE		Standard of the ASME's – bioprocessing equipment association
ATEX		Atmosphères Explosibles. ATEX comprises the directives of the European Union in the area of explosion protection. For one thing, this is the ATEX equipment directive 94/9/EC, for another, the ATEX workplace directive 1999/92/EC.
cCSAus		Test of a product by CSA according to applicable safety standards in Canada and the USA.
CE		Conformité Européenne. By affixing the CE mark, the manufacturer confirms that the product complies with the European directives applicable to the specific product.
CSA		Canadian Standards Association. A non-governmental Canadian organization which issues standards as well as checking and certifying the safety of products. It is now globally active.
cULus		Test of a product by UL according to applicable safety standards in Canada and the USA.
DIN EN ISO 9001:2015		This norm is the basis for a multitude of varied organizations in different industries worldwide for quality assurance and quality management. It is the most widespread standards of ISO (International Organisation for Standardization).
EAC		Euroasian conformity. The symbol is used similar to the European CE mark. The manufacturer or supplier confirms that the machine has passed all necessary compliance procedures in one of the Member States of the customs union.
EG 1935/2004		Materials in contact with the product used in pumps from GEA Hilge are in accordance with EC regulation 1935/2004. This defines a general framework for materials and objects intended to come into contact with foodstuffs.
EHEDG		European Hygienic Engineering & Design Group. European supervisory authority for foodstuffs and pharmaceuticals. This authority issues approvals and certificates for products and materials that are used in the foodstuffs and pharmaceuticals industries.
FDA		Food and Drug Administration. US supervisory authority for foodstuffs and pharmaceuticals. This authority issues approvals and certificates for products and materials that are used in the foodstuffs and pharmaceuticals industries.
UL		Underwriters Laboratories. An organization founded in the USA for checking and certifying products and their safety.
USP Class VI		The United States Pharmacopeial Convention (USP) is a scientific nonprofit organization that sets standards to help protecting public health. Class VI administer tests and impacts of material and their substances on animal and human tissues.

Abbreviation	Explanation
°C	Degrees Celsius, unit of measurement for temperature
°F	Degrees Fahrenheit, unit of measurement for temperature
3D	Three-dimensional
A	Ampere, unit of measurement of current intensity or Output, term used in automation
AC	Alternating Current
ADI free	All elastomer compounds are free of animal-derived ingredients
AISI	American Iron and Steel Institute, association of the American steel industry
ANSI	American National Standards Institute, American body for standardizing industrial processes
approx.	approximately
AS-i	Actuator Sensor interface, standard for fieldbus communication
ASME	American Society of Mechanical Engineers, professional association of mechanical engineers in the USA
ASME-BPE	Standard of the ASME's – bioprocessing equipment association
ATEX	Atmosphères Explosibles, synonymous with the directives of the European Union for potentially explosive areas
bar	Unit of measurement for pressure. All pressure values [bar/psi] refer to positive pressure [bar _g /psi _g], unless specifically stated otherwise.
bar _g	Unit of measurement for pressure relative to atmospheric pressure
CAN	Controller Area Network; asynchronous serial bus system
CE	Conformité Européenne, administrative symbol for the free movement of industrial products
CIP	Cleaning In Place, designates a process for cleaning technical process systems.
CRN	Canadian Registration Number, is issued by a Canadian Jurisdiction and covers pressure vessels, fittings, or pressure piping. It is a necessary authorization allowing these components to be in operation in Canada.
CSA	Canadian Standards Association, a non-governmental Canadian Standardization organization
Cv	The Cv value corresponds to the water flow rate through a valve (in US gal / min) at a pressure differential of 1 PSI and a water temperature of 5 °C to 30 °C. kv = 14,28 Cv (USA).
Cvs	The Cv values of a valve at nominal stroke (100 % opening) is designated the Cvs value.
dB	Decibel, one tenth of a bel, named after Alexander Graham Bell and used for identifying levels and dimensions
DC	Direct Current
DIN	Deutsches Institut für Normung e. V. Standardization organization in the Federal Republic of Germany, DIN = synonym for standards issued by the organization

Abbreviation	Explanation
DIP	Dual Inline Package, design of a switch
DN	Diameter Nominal, DIN nominal width
Device Net	Network system used in the automation industry to interconnect control devices for data exchange
E	Input, term used in automation
EAC	Certification of technical conformity from the customs union of Russia/Belarus/Kazakhstan
Pressure Equipment Directive 97/23/EC	Directive of the European Parliament and the Council Directive for layout and conformity evaluation for pressure equipment and assemblies with a maximum pressure (PS) of more than 0.5 bars.
EG No. 1935/2004	Regulation of the European Parliament which lays down common rules for materials which come, or may come, into contact with food, either directly or indirectly.
EHEDG	European Hygienic Engineering and Design Group. Consortium of equipment manufacturers, food industries, research institutes as well as public health authorities
EN	European standard, rules of the European Committee for Standardization
EPDM	Ethylene propylene diene rubber, acronym acc. to DIN/ISO 1629
Ex	Synonym for ATEX
FDA	Food and Drug Administration, official foodstuffs monitoring in the United States
FEM calculation	Finite Element Method; calculation process for simulating solids
FKM	Fluorinated rubber, acronym acc. to DIN/ISO 1629
GOST	Gosudarstvennyy Standart, Certification of conformity for components according to standards and regulations of the Russian Federation
H	Henry, unit of measurement for inductance
HNBR	Hydrated acrylonitrile butadiene rubber, acronym acc. to DIN/ISO 1629
Hz	Hertz, unit of frequency named after Heinrich Hertz
I	Formula symbol for electrical current
IEC	International Electrotechnical Commission, international standardization organization for electrical and electronic engineering
IP	Ingress Protection/International Protection, index of protection class acc. to IEC 60529
IPS	Iron Pipe Size, American pipe dimension
ISA	International Society of Automation, international US organization of the automation industry
ISO	International Organization for Standardization, international organization that produced international standards, ISO = synonym for standards from the organization
kg	Kilogram, unit of measurement for weight
Kv	The Kv value corresponds to the water flow rate through a valve (in m ³ /h) at a pressure differential of 0.98 bar and a water temperature of 5 °C to 30 °C.

Abbreviation	Explanation
Kvs	The Kv values of a valve at nominal stroke (100 % opening) is designated the Kvs value
L	Conductive
LED	Light-Emitting Diode
mm	Millimeter, unit of measurement for length
M	Metric, system of units based on the meter or Mega, one million times a unit
m³/h	Cubic meters per hour, unit of measurement for volumetric flow
max.	Maximum
NAMUR	Standardization working association for measuring and control technology in the chemical industry, synonym for the interface type of the organization, especially for potentially explosive atmospheres
NC	Normally Closed; valve or solenoid valve control which is closed in idle status
NO	Normally Open; valve or solenoid valve control which is open in idle status
NOT-element	Logic element, NOT gate
NPN	Signal transmission against reference potential, current-consuming
NPT	National Pipe Thread, US thread standard for self-sealing pipe fittings
OD	Outside Diameter, pipe dimension
ODVA	Open DeviceNet Vendor Association, global association for network standards
PA 12/L	Polyamide
Pg	Armored thread
PN	Nominal pressure for pipeline systems according to EN 1333, rated pressure in bar at room temperature (20 °C)
PNP	Signal transmission against reference potential, current-supplying
PPO	Polyphenylene oxide, thermoplastic material
PS	Maximum permitted operating pressure at which the components can operate safely at maximum allowable temperature (TS)
psi	Unit of measurement for pressure, pound-force per square inch, 1 psi = 6894.75 Pa. All pressure values [bar/psi] refer to positive pressure [bar _g /psi _g], unless specifically stated otherwise.
psi _g	Unit of measurement for pressure relative to atmospheric pressure
PV	Solenoid valve
R _a in µm	Average roughness value, describes the roughness of a technical surface
International Protection-Code IP67, IP66, IP69K	Classifies and rates the degree of protection provided against intrusion dust, accidental contact, and water

Abbreviation	Explanation
SES	GEA Tuchenhausen control head for Ex areas, control top system of GEA Tuchenhausen
SET-UP	Self-learning installation, the SET-UP procedure carries out all necessary settings for generating messages during commissioning and maintenance.
SIP	Sterilization in Place, refers to a process for cleaning technical process systems
SMS	Svensk Mjöl Standard, Scandinavian pipe dimension
SW	Indicates the size of a tool spanner, "Schlüsselweite"
TA-Luft VDI 2440	If a product is certified according to TA Luft it meets the requirements for proof of high grade performance according to TA Luft of $1.0 \times 10^{-4} \text{ mbar} \times l / (s \times m)$ at service conditions under the VDI guideline 2440. The product will hence be tested for tightness.
TS	Maximum permitted operating temperature
UL	Underwriters Laboratories, a certification organization established in the USA
USP Class VI	The United States Pharmacopeial Convention (USP) is a scientific nonprofit organization that sets standards to help protecting public health. Class VI administer tests and impacts of material and their substances on animal and human tissues.
UV	Ultraviolet, ultraviolet radiation is a wavelength of light
V	Volt, unit of measurement for voltage
VMQ	High-polymer vinyl methyl polysiloxane, silicone rubber, MVQ = synonym
W	Watt, unit of measurement for power
Y	Control air connection for the working cylinder, designation from pneumatic systems
μ	Micro, one millionth of a unit
Ω	Ohm, the unit of electrical resistance named after Georg Simon Ohm

We live our values.

Excellence • Passion • Integrity • Responsibility • GEA-versity

“Engineering for a better world” is the driving and energizing principle connecting GEA’s workforce. As one of the largest systems suppliers, GEA makes an important contribution to a sustainable future with its solutions and services, particularly in the food, beverage and pharmaceutical sectors. Across the globe, GEA’s plants, processes and components contribute significantly to the reduction of CO₂ emissions, plastic use as well as food waste in production.

GEA is listed on the German MDAX and the STOXX® Europe 600 Index and also included in the DAX 50 ESG and MSCI Global Sustainability indexes.