

Counts Gummies into Pre-made Gusseted Re-sealable Bags

CountRite™



12" Color Touch Screen

NUMBER of STATIONS: 8

STATION 1

Pouch Magazine & Auto Loading Station

- Conveyor Belt Stack
- Pick Up Arm with Suction Pad
- Pouch Width Adjustment Guide
- Pouch Grippers and Transfer Jaws
- Toolless Size Change-overs
- Holds up to 1,000 bags

STATION 2 – Zipper Opening Station (option)

- Finger & Plunger Systems
- Date Coding Position (option)
(Inkjet, Emboss or Heat Transfer)

STATION 3

Pouch Mouth & Bottom Opening Station (option)

- 8 Pneumatic Grippers

STATION 4

Pouch Mouth & Bottom Gusset Opening (option)

- Pneumatic Mechanical
- No Bag No Fill Detection

STATION 5 – Fill Station / Counter (option)

- RC60 12 Track Electronic Channel Counter
- Mounted on Raised Platform
- Stand Alone Control Panel with HMI
- 316 Stainless Dimpled Feed Trays
- 316 Stainless Contact Parts

Counting Rate:

- Max. 6,000 pieces per minute (varies depending upon size, shape & surface tension)

Dimensions:

- W526 x D1,270 x H920mm

STATION 6 – Sealing Station

STATION 7

Sealing & Air Removal

- Sealing Jaw
- 0–300°C Temperature Range
- PID Temperature Control System
- Air Squeeze Station (option)


STATION 8

Cooling & Zipper Closing Station

- Pouch Discharge Conveyor


Options:

- Zipper Opening and Closing System
- Bottom Gusset Pneumatic Opening System
- Product Settling Station
- Bag Air Squeeze Station
- Flat Pouch Opening Device
- Crooked Pouch Detection
- Double Pouch Detection
- Interlocking Plexiglas Covers
- Inkjet Printer
- RC60 Channel Counter
- Bulk Elevator Feeder
- Desiccant Inserter (.5–2gm)
- Nitrogen Purge System

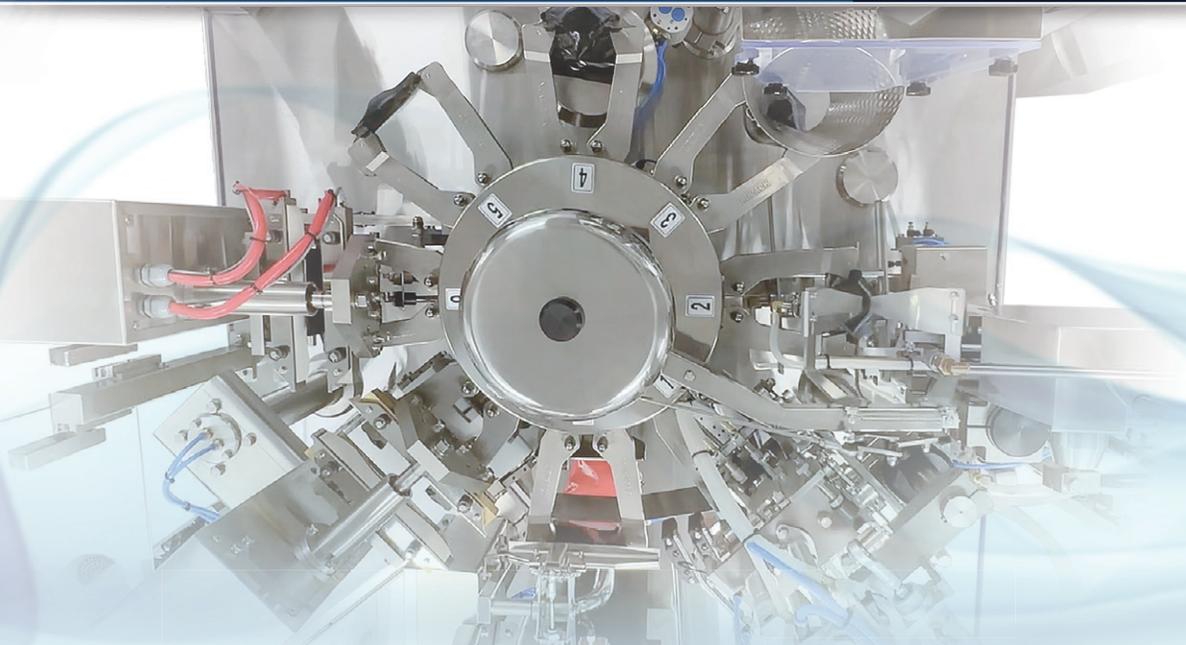

CountRite™ - 8 Station Pre-made Gusseted Bag Counting System

Countrite™ Top View

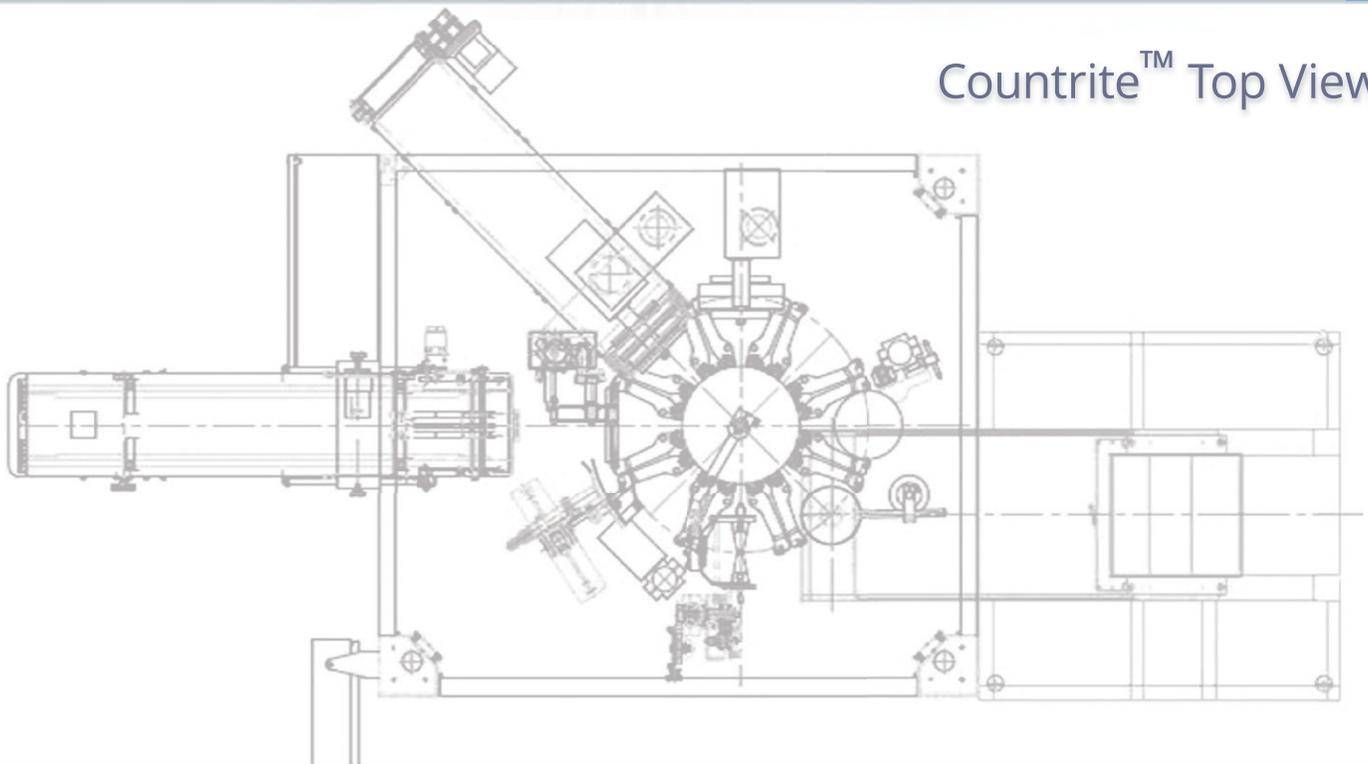

TECHNICAL SPECIFICATIONS

Speed: 35-50 Pouches per Minute Maximum	Controls: 12" Color Touch Screen	Construction:
Standard Bag Size Range: - Width: 100~240mm - Length: 150~350mm	Drive: Variable Speed Rotary Index Drive	- Polycarbonate Upper Doors (x4) - 304 Stainless Lower Panels - Polyurethane Coated Steel Frame
	Lubrication: Auto Lube System	Weight: 2,800kg
	Power: 230V / 3ph / 60Hz	
	Dimensions: 5,255 x 2,408 x 2,867mm	