



Rotary Fluid Bed Conditioner Ø800mm

“Conditioner designed to dedust and condition at high capacity’s”

The RFBC800 system is specially designed for dedusting and conditioning your seeds directly after treating. Because of its compact design it can be placed after every kind of treating system already in place. The RFBC800-7 conditioner has a capacity from 4-8t/hr (wheat seeds). We can also deliver a complete system including a rotary coater to have a complete automated coating/drying installation.

Product Characteristics:

- Adaptable to already used rotary coating systems
- Standard manual operated version
- PLC and Touch panel controlled system available
- Capacity varies depending on your rotary coating process, when you give us the needed capacity, humidity and process variables we can dimension the conditioner for you.
- Several air conditioning options available (depending on your process)
- Cooling section, with optional air cooling unit
- Different capacities/drying times available


Due to the variety of coating processes and humidity conditions of your specific business, we configure the dryers based on our test equipment. Ask us for more information about a dryer for your specific process.



RFBC800 Conditioner with capacity of 4-8t/hr of wheat

*Pictures used in this leaflet could be different from the machinery

DIMENSIONS

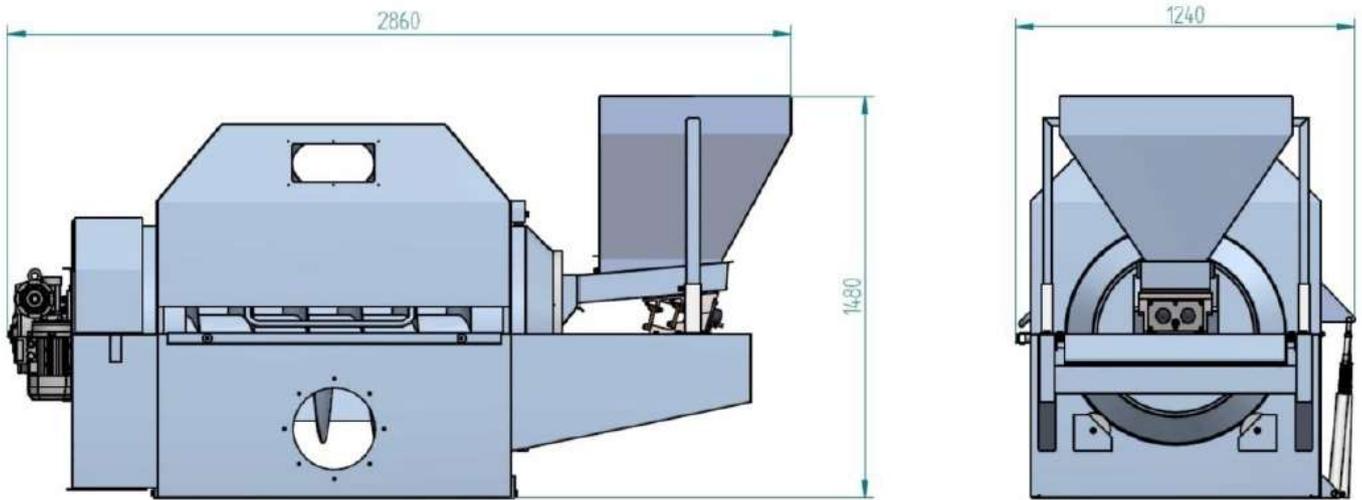

Technical information	
Power	3x400 Vac 50Hz 8kW 16A
Inlet air heated	3000-3500m ³ /h (depending on process) Approx. 30°C
Required dust extraction	4000-4500m ³ /h

*Pictures used in this leaflet could be different from the machinery