



FT0511 OVERWRAPPING

HIGH-SPEED OVERWRAPPING MACHINE



Ultra high-speed (**up to 500/min.**) overwrapping machine with continuous carton feeding system which prevents products from pushing against each other both at the start and at the end of the line. Thanks to advanced technical solutions, such as the inline tear-tape unit, the double reel holder and the automatic film splicing, this machine ensures top quality appearance of packages.

FTO511 OVERWRAPPING

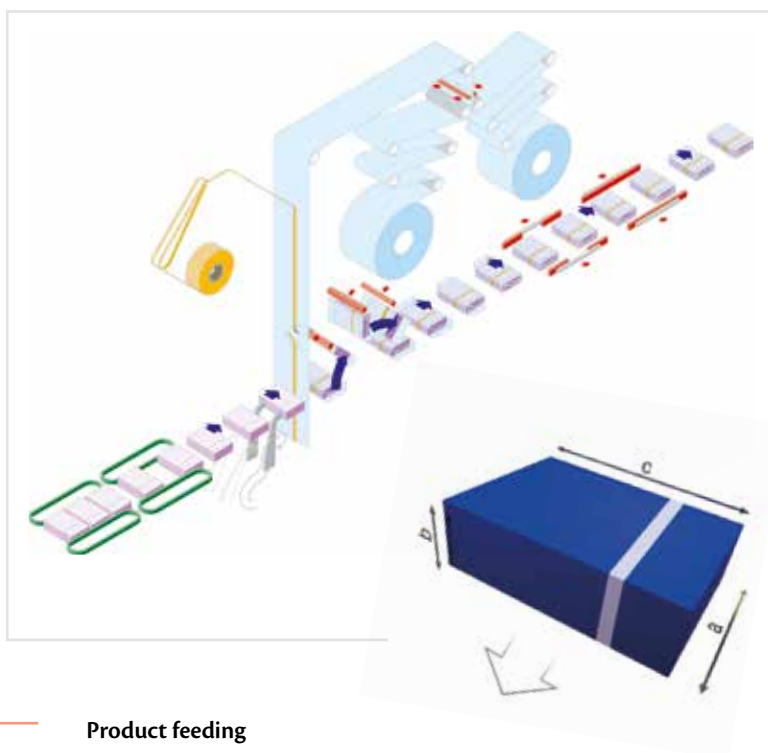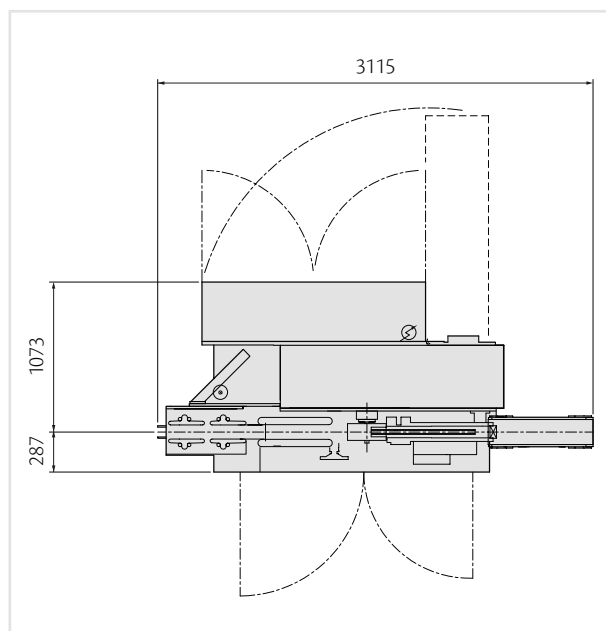

FTO511 TECHNICAL DATA

		MIN.	MAX.
Product range	a	30	75
	b	12	30
	c	30	140
Production	up to 500 ppm		
Installed power	20 kW		
Operating pressure	6 bar		
Maximum air consumption	100 NI/min		
Weight	2200 kg		

Product feeding

- All heat sealable films, such as PP, PVC, Cellophane max.
Reel diameter: 300 mm
- Min. Reel core diameter: 76.2 mm
- Max. web width: 150 mm

- Single
- Multiple side by side
- Double overlapped



Sizes out of range can be handled after been evaluated from technical office.

GIMA S.P.A.

Via Kennedy, 17 - 40069 Zola Predosa (Bologna) - Italy
Phone +39 051 6169 711 - Fax +39 051 7523 78
info@gima.com - www.ima.it