


CASE CLOSER CC-41

The CC-41 automatically folds the top case flaps and closes them with tape. To maximize operator convenience, the software of the case closer is integrated in the bag closer.

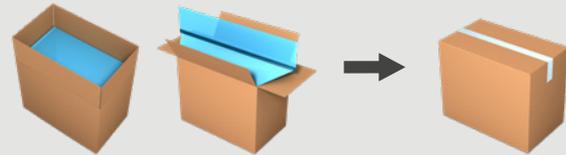

HEAVY DUTY
CASE
CLOSER

Industrial Design to avoid production stops

- **Heavy duty machine for a reliable production 24/7.**
- **Standard robust taper head** with open design for easy tape exchange.
- **Floating taper head** (optional).

Protect your product & reduce costs

- **Perfectly controlled** case closing thanks to the pneumatic driven long flap folding.
- **High-quality components** reduce maintenance and spare parts costs.
- **Easily adjustable**



TECHNICAL SPECIFICATIONS

Perfectly controlled case closing

- Case stop for rear flap folding.
- Pneumatic driven folding plates for long flap folding.
- The long case flaps are joined perfectly thanks to lateral wheels.
- Flexible side belts ensuring the same grip, even if the box width slightly varies.

Heavy duty


- Direct motor driven side belts, driven by 2 motors.
- Heavy duty machine frame with easy access for maintenance.

Standard integrated in the bag closer to save floorspace

- Visualize all messages in the bag closer HMI.
- The case closer is completely controlled by the bag closer.
- One integrated safety area.
- One centralized operator panel.
- One power supply.

Standard equipped with

- In- and outfeed guarding.
- Access point for remote support (one per line).
- Adjustable box pressing before taping.

| CASE SPECIFICATIONS (For other dimensions, please contact Pattyn) | |
|---|---|
| Range (L x W x H) inches | Min. 10 ½" (L) x 8" (W) x 5" (H) // 9" (D) Max. 25 ½" (L) x 16" (W) x 18" (H) // 26" (D) Outside dimensions |
|  | |
| TAPE SPECIFICATIONS | |
| Type | 2" tape |
| Tape roll length | 3248 ft |
| Tape roll diameter | Max. 11.8" |
| OUTPUT AND CONSUMPTION | |
| Output tape | Standard 18 cases/minute |
| Installed power | 1 kW |
| Voltage | 3 x 480V + E / 60 Hz |
| Air supply | 90 PSI, (½" min) |
| Air consumption | 0.1 ft³ / cycle |
| Weight | 1653 lbs |
| OPTIONS (more options are available, please contact Pattyn) | |
| Stainless steel execution | |
| 3" tape | |
| Complete detection set tape | |
| Flaps control section | |
| Bottom belt drive for pails | |
| Stand-alone machine | |
| 15" HMI (for stand-alone machine) | |
| Floating taper head | |
| Machine roof | |
| Motor driven width and height regulation | |



Pneumatic driven long flap folding



Flexible side belts



Robust side belts, driven by 2 motors



Easy tape loading system for upper taper

Pattyn North America Inc.
N56W24660 N. Corporate Circle
Sussex, WI 53089 - U.S.A

Ph +1 262-966-0300
Fax +1 262-966-0312
SalesUsa@pattyn.com



The description, pictures and information given have an indicative value. We reserve the right to make changes without notice. Information and content is property of Pattyn. For customized executions please contact Pattyn. CC-41 2023 - V01

PATTYN[®]

Turnkey solutions for industrial packaging.