


High-Flow-Rate FIBC Dischargers

SBB-HFF

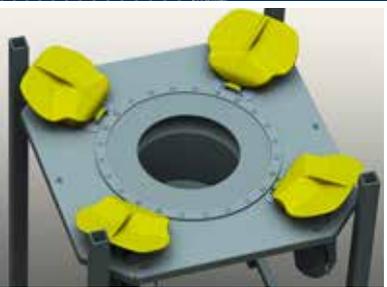

**EASY MATERIAL
DISCHARGE**

**COMPACT &
CONVENIENT**



EASY, CLEAN AND SAFE FIBC EMPTYING

The SBB-HFF-type FIBC Discharger is the ideal stationary solution for efficient FIBC emptying. Its design guarantees safe and handy loading, unloading and opening of FIBCs. The innovative petal-shaped flow aid system allows total or partial discharge of the material ensuring unparalleled efficiency and cost-saving operation even with difficult-to-empty materials.

The FIBC loading interface is the core of a system designed for easy and safe access when connecting the FIBC outlet valve. This interface enables dust-proof sealing thus avoiding product leaks and contamination.

The SBB-HFF-type FIBC Discharger with loading interface is **essential for a healthy, clean and safe indoor work environment.**

S-MODEL

for loading by forklift-truck



C-MODEL

for loading by crane



M-MODEL


for loading by hoist



Overall Dimensions

CODE	OUTLET Ø mm	MAX. HEIGHT mm	WIDTH mm	MAX. FIBC DIMENSIONS mm	MAX. FIBC HEIGHT mm	MAX. FIBC WEIGHT kg
SBB-HFF C	273	1,930	1,400	1,100 x 1,100	unlimited	2,000
SBB-HFF S	273	4,040	1,400	1,100 x 1,100	2,000	
SBB-HFF M	273	5,310	1,580	1,100 x 1,100	2,000	

Benefits



Internal footprint (no protruding parts) allowing optimised battery configuration



Easily adaptable to a wide range of materials, different FIBC sizes, types and weights



No labour required for complete FIBC emptying



Large-scale industrial production ensuring an attractively priced high-quality product



Full pre-equipment for subsequent retrofitting of any accessories



Problem-free, complete emptying of bag corners even with compressed bulk materials

Features

- Modular design, easily adaptable to different bulk solids, FIBC sizes and weights
- Electric motovibrator as additional material discharge aid
- Innovative discharge system tailored for different material characteristics
- ATEX version available 

Hopper pre-equipped for 4 petal-type flow aids

Pneumatic control panel

Access hatchway for FIBC opening



CE-certified for 2,000 kg (4,410 lb)

Innovative petal-type pneumatic actuator design

273 mm (11 in) diameter outlet


Accessories



LUMP BREAKING FEEDER VALVE
aiding material flow



ELECTRONIC CONTROL PANEL
individually programmable according to specific material properties

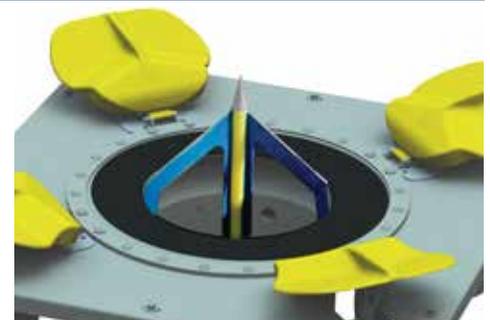

CUTTING KIT
3-blade configuration enhancing cutting performance

Industries



Drymix Processing



Chemicals



Paint and Varnish Processing



Foundries



Glass Processing


Application



MECHANICAL
FEEDING & CONVEYING



PNEUMATIC CONVEYING

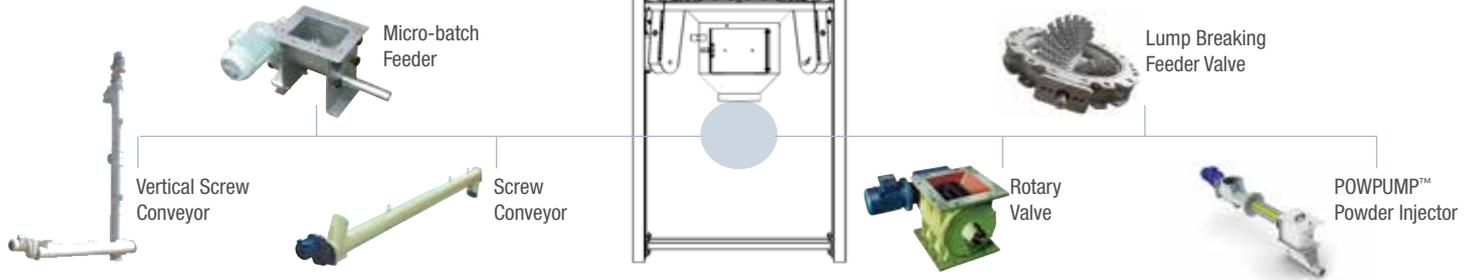

203001809 May 2022 Rights reserved to modify technical specifications.

This brochure has been edited for distribution in European Union countries.

