

Continuous Single Shaft Mixers

WAH



CERTIFIED

- | | | | | | | |
|-------------------|-----------------|--------------------|--------------------------|-----------|------------|-------------|
| Foods | Plastics | Minerals | Cosmetics | Chemicals | Metallurgy | Animal Feed |
| Organic Materials | Pharmaceuticals | Building Materials | Environmental Technology | | | |


CONSTANT MIXING QUALITY

The WAH Continuous Single Shaft Mixer is the ideal machine for producing the highest quality mixtures with maximum production efficiency. The WAH range also features ATEX-certified machines which can operate in “zones” according to the classification of the ATEX Directive with dust and gas explosive atmospheres, even if conductive powder is present.

Technical Features

- Capacity: 2 ~ 1,000 m³/h (1.2 ~ 590 cfm) depending on recipe and mixer configuration
- Operating atmospheres: group IIA, IIB for gas, group IIIA, IIIB and IIIC for dust
- Optionally up to 20% liquid addition
- ATEX-certified devices 
- Mixing chamber for temperatures of up to 150 °C (302 °F) and 3.0 bar (43.5 PSI) pressure
- ATEX certification compatible with most finishing materials for tools and chamber

Overall Dimensions

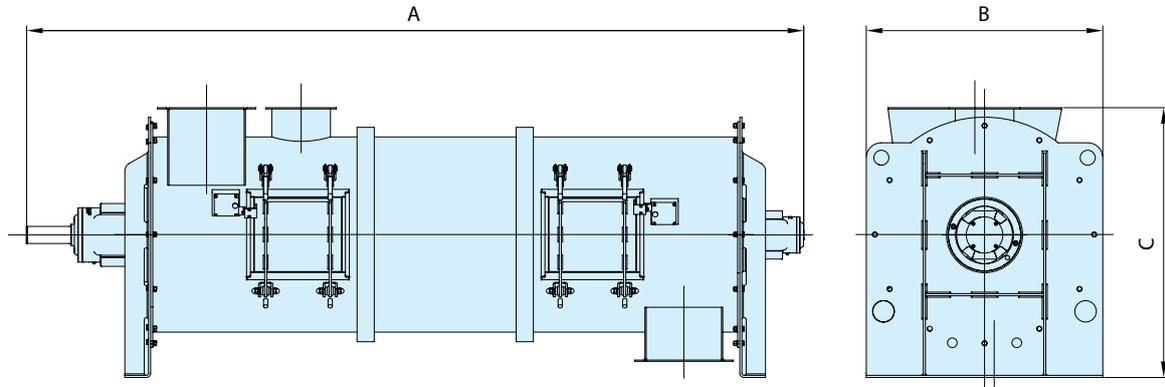


	A	B	C	50% ● dm ³ /h		Empty Weight (kg)
				in 60 sec	in 180 sec	
WAH00075	1,690	490	560	2,020	670	210
WAH00150	1,960	570	630	4,030	1,340	350
WAH00300	2,220	670	800	7,890	2,630	580
WAH00500	2,550	770	920	13,720	4,570	840
WAH01000	3,140	930	1,120	27,990	9,330	1,390
WAH01800	3,670	1,100	1,270	50,170	16,720	2,100
WAH03000	3,920	1,340	1,470	82,580	27,530	2,800
WAH04800	4,510	1,500	1,800	134,280	44,760	3,800
WAH06000	4,816	1,600	1,860	165,710	55,240	4,500
WAH08800	5,325	1,810	2,130	245,800	81,930	5,840
WAH10500	5,580	1,910	2,240	295,320	98,440	6,600
WAH15000	6,090	2,110	2,470	411,890	137,300	8,200
WAH20000	6,620	2,310	2,670	549,180	183,060	11,900
WAH25000	6,890	2,430	2,740	686,480	228,830	13,650

Dimensions in mm

Benefits

- ✓ **Maximum mixing homogeneity**
- ✓ **Rated power adapted to application**
- ✓ **No product degradation**
- ✓ **Low maintenance**
- ✓ **Mixing know-how and test facilities**
- ✓ **Easily accessible**
- ✓ **High uptime**
- ✓ **Safe and durable**

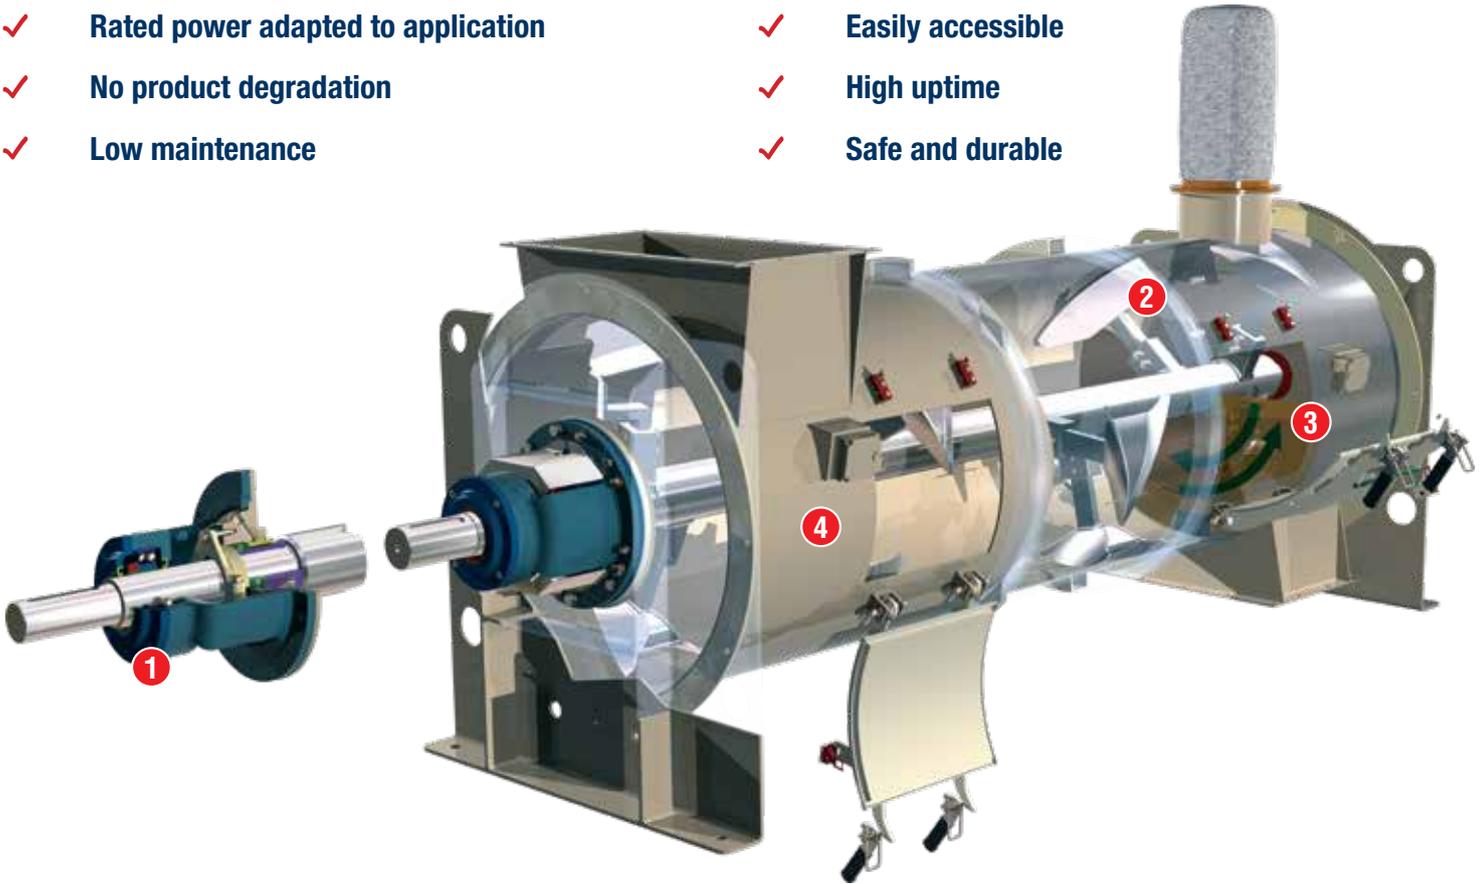

- 1** End bearing assemblies with various types of shaft seals (air or nitrogen-purged)
- 2** Replaceable, adjustable mixing tools
- 3** Large inspection doors enabling comfortable access to the interior of the mixer
- 4** Heavy-duty mixing chamber manufactured from carbon steel, anti-wear steel, or 304L / 316L stainless steel

Mixing Tools



Choppers



Options



Choppers, liquid injectors, temperature jacket



Chamber liner in special anti-wear material



Special tool arrangement for different applications




Front discharge

Application



ATEX Zones

Zone: a place in which an explosive atmosphere is...	ATEX Zone	
	Gases	Dusts
continually present	0	20
likely to occur occasionally in normal operation	1	21
not likely to occur in normal operation and only for very short durations	2	22

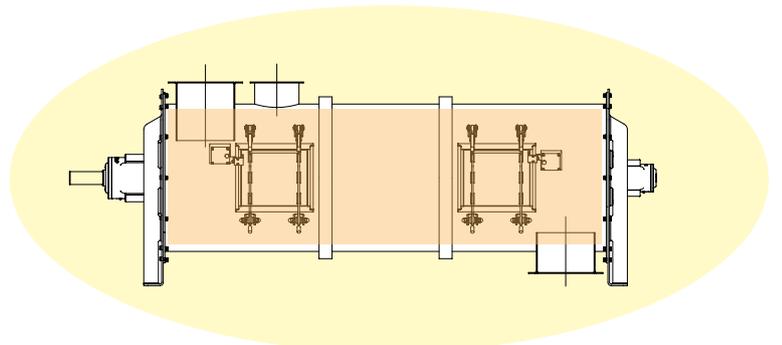

■ ATEX zone 21/1

■ ATEX zone 20/0



203001157 November 2022 Rights reserved to modify technical specifications.

This brochure has been edited for distribution in European Union countries.

